DRAFT EIA & EMP FOR PROPOSED ROUGH STONE AND GRAVEL QUARRY

CATEGORY - B1

(Submitted for Public Hearing as per the provisions of EIA Notification 2006 & its amendments thereof)

ToR Identification No. T025B0108TN5329247N (F.No. 12576), dated 25.09.2025

PROPOS	PROPOSED QUARRY LEASE DETAILS			
SURVEY NOS	394/2, 396/2, 402(P), 403(P), 407/1A1, 407/1A2, 407/1B, 407/2A, 407/2B, 408/1(P), 408/2(P), 408/4, 409(P) and 698(P)			
VILLAGE	MELKARAIPATTI			
TALUK	PALANI			
DISTRICT	DINDIGUL			
EXTENT	14.40.00 Ha			
CLUSTER EXTENT	24.79.50 Ha			
PROPOSED PRODUCTION OF ROUGH STONE AND GRAVEL- FIVE YEARS	ROUGH STONE : 57,26,860 m ³ GRAVEL : 2,15,410 m ³			
PEAK PRODUCTION	ROUGH STONE: 11,63,350 m ³ GRAVEL: 1,15,488 m ³			
LAND	PATTA LAND			

(Sector No. 1(a) Sector No.1 as per NABET)

Category of the Project: B1 Cluster Mining, Total Cluster Area – 24.79.50 ha

Baseline Monitoring Period – March 2025 to May 2025

APPLICANT

M/S.SHRI RAJRUDHRA MINERALS PRIVATE LIMITED, NO.99/2B1B, 1ST FLOOR, VELLORE MAIN ROAD, ARCOT TALUK, RANIPET DISTRICT

ENVIRONMENTAL CONSULTANT

M/s. GLOBAL MINING SOLUTIONS (NABET Accredited & ISO 9001 Certified

(NABET Accredited & ISO 9001 Certified Consultant)

Plot No. 6, S.F.No. 13/2, A2, VS City, RC Chettypatty, Kottamettupatty, Omalur, Salem, Tamil Nadu – 636 455. NABET Accreditation No: NABET/EIA/23-26/SA

0241, Valid Until - January 4, 2026 Contact: 97502 23535 & 94446 54520 Email: infoglobalmining@gmail.com,

globalminingsolutionssalem@gmail.com

LABORATORY

M/s. SHRIENT ANALYTICAL & RESEARCH LABS PRIVATE LIMITED

(NABL Accredited Testing Laboratory)
Valid Until -30.11.2025
#416/15, Dhargas Road, Perungalathur,
West Tambaram, Chennai,
Tamil Nadu, India.

OCTOBER - 2025





AMENDMENT PAGE

SL	Page No.	Section / Clause / Para / Line (as Applicable)	Date of Amendment	Amendment Made	Reasons of amendment	Signature of Person Authorizing Amendment
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

ACKNOWLEDGEMENT

M/s. Global Mining Solutions, Salem is very much thankful M/s. Shri Rajrudhra Minerals Private Limited, Lessee for the confidence and trust placed on the organization for carrying out Environmental Impact Assessment (EIA) study for the proposed Rough Stone and Gravel quarry over a lease extent of 14.40.00 Ha., & Cluster extent of 24.79.50Ha., located at Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State and formulating the Environmental Management Plan (EMP). We also gratefully acknowledge the cooperation and assistance provided by concerned government authorities for collection of secondary information for the preparation of EIA/EMP report. Our sincere thanks to the local people of Melkaraipatti Village and the nearby villages for their whole hearted cooperation and constant involvement during the entire field study without which the study would not have been possible.

For: M/s. Global Mining Solutions

(M. Prabu)

Managing Director

UNDERTAKING

In line with MoEF OM No. J – 11013/41/2006-IA.II (I) dated 5th October 2011, we hereby give our undertaking for owning the content and information in the EIA/EMP report submitted for EC of the proposed Rough Stone and Gravel quarry over a lease extent of 14.40.00 Ha., & Cluster extent of 24.79.50Ha., located at Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State.

For: M/s. Global Mining Solutions

Name: M.Manikandan

EIA Coordinator - Mining

UNDERTAKING

In Line with OM no. J-11013/41/2006-IA.II (1) dated 4th Aug 2009 and its Amendments, we hereby confirm that all Terms of Reference issued by Ministry of Environment, Forest and Climate Change vide ToR Identification No. TO25B0108TN5329247N (F.No. 12576), dated 25.09.2025 of EIA/EMP report for the proposed Rough Stone and Gravel Quarry over a lease extent of 14.40.00 Ha., & Cluster extent of 24.79.50Ha., located at Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State for the production of 57,26,860 m³ of Rough Stone and 2,154,10 m³ Gravel for the period of 5 years from the proposed lease area and the details has been complied in the EIA/EMP report is factually correct.

The EIA/EMP report has been prepared by M/s. Global Mining Solutions (GMS), Salem. GMS is a NABET accredited consultant for preparation of EIA/EMP report of Mining of Minerals (Opencast & Under Ground Mining) vide certificate No. NABET/EIA/23-26/SA 0241, valid till 04.01.2026.

For: M/s. Global Mining Solutions

Name: M.Manikandan

EIA Coordinator - Mining





National Accreditation Board for Education and Training

Certificate of Accreditation

Global Mining Solutions

Plot No - 6 SF No 13/2 A2, VS City, RC Chettypatty, Kottamettupatty, Omalur, Salem, Tamil Nadu-636455

The organization is accredited as Category-A under the QCI-NABET Scheme for Accreditation of EIA Consultant Organization, Version 3: for preparing EIA/EMP reports in the following Sectors-

S.	Sector Description	Sector	Sector (as per)	
No	Sector Description	NABET	MoEFCC	Cat.
1	Mining of minerals including opencast/ underground mining	1	1 (a) (i)	А
3	Thermal power plants	4	1 (d)	В
5	Metallurgical industries (ferrous)	8	3 (a)	А
6	Cement Plants	9	3 (b)	А
26	Building and construction projects	38	8 (a)	В
27	Townships and Area development projects	39	8 (b)	В

Note: Names of approved EIA Coordinators and Functional Area Experts are mentioned in SAAC minutes dated May 20, 2025, posted on QCI-NABET website.

The Accreditation shall remain in force subject to continued compliance to the terms and conditions mentioned in QCI-NABET's letter of accreditation bearing no. QCI/NABET/ENV/ACO/25/3638 dated May 30, 2025. The accreditation needs to be renewed before the expiry date Eco Chem Sales and Services, Surat following due process of assessment.

Valid up to January 4, 2026

Certificate No. NABET/EIA/23-26/SA 0241

Issue Date May 30, 2025

Prof (Dr) Varinder S Kanwar

CEO - NABET

For the updated List of Accredited EIA Consultant Organizations with approved Sectors please refer to QCI-NABET website.

DECLARATION BY EXPERTS

Declaration by Experts contributing to the proposed Rough Stone and Gravel Quarry over a lease extent of 14.40.00 Ha., & Cluster extent of 24.79.50Ha., located at Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State for the production of 57,26,860 m³ of Rough Stone and 2,154,10 m³ Gravel.

I, hereby, certify that I was a part of the EIA team that developed the above EIA.

EIA Coordinator Name: M. Manikandan

Signature & Date

Period of involvement: March 2025 to May 2025.

Contact information:

M/s Global Mining Solutions

Plot No.6, SF No. 13/2, A2, VS City, RC Chettypatty,

Kottamettupatty, Omalur,

Salem, Tamil Nadu – 636 455

	. Franctica and	Name of the	T	G:t
S. No.	Functional areas	Name of the expert/s	Involvement (period and task**)	Signature and Date
1	АР	Dhanalakshmi Ramanathan	Assessment of existing air quality, Impact of the project on ambient air and suggested mitigation measures for air pollution. Period: March 2025 to May 2025.	R. Dhams_
2	WP	Abirami Kaliaperumal	Assessment of existing water quality, impact of the project on surface and ground water quality, suggested mitigation measures for minimizing the impact. Period: March 2025 to May 2025.	K. Anny
3	SHW	Ramadoss N	Assessment of waste generated from the project, suggested waste management practices. Period: March 2025 to May 2025.	Ce Ray
4	SE	Sarasvathy K	Baseline SE studies. Data compilation and assessment. Impact of the project on SE status of the area. Formulation of CER plan. Period: March 2025 to May 2025.	or gety
5	EB	Saravanan S	Baseline data collection of related to ecology of the area. Period: March 2025 to May 2025.	A araranas
6	HG	Ravinthiran N	Hydrogeological feature of the area. Ground water depth and impact of project on ground water of the area. Period: March 2025 to May 2025.	No or Mithurs (BD)

7	AQ	Srilatha Thiruveedhula	Air quality modeling utilizing the area source model. Predication of the ground level concentration of the dust. Suggesting suitable mitigation measures. Period: March 2025 to May 2025.	T Smalte
8	NV	Dhanalakshmi Ramanathan	Ambient noise study of the area. Incremental noise generation due to quarry operation and impact of the noise due to the project. Period: March 2025 to May 2025.	R. Dhams
9	LU	Srilatha Thiruveedhula	Preparation of land use map based on satellite imagery. Land use classification and analysis. Impact prediction of the project on the surrounding land environment. Period: March 2025 to May 2025.	T Similalte
10	RH	S.V. Prashant	Identification of the Risk related to the mining activities. Preparation of emergency disaster management plan. Plan for supply of safety equipment for the worker. Period: March 2025 to May 2025.	forashand.
11	SC	Shisupal Sing	Soil monitoring, secondary data collection on soil type, soil management practices, utilization of topsoil. Period: March 2025 to May 2025.	Brouper Singly.
12	GEO	Valliappan Meyyappan	Geological map, stability of quarry and dump, management plan for mine stability, after use of mining quarry and geological feature of the area. Period: March 2025 to May 2025.	Julian

EIA CONTENT

CHAPTER NO	TITLE	PAGE NO
1	INTRODUCTION	50
1.1	PURPOSE OF THE REPORT	50
1.2	BRIEF DESCRIPTION OF THE PROJECT	53
1.3	IMPORTANCE OF THE PROJECT TO THE REGION	57
1.4	REGULATORY COMPLIANCE	57
1.5	NEED AND JUSTIFICATION OF THE PROJECT	60
1.6	STRUCTURE OF THE REPORT	61
2	PROJECT DESCRIPTION	64
2.1	TYPE OF PROJECT	64
2.2	NEED FOR THE PROJECT	64
2.3	LOCATION OF THE PROJECT	64
2.4	SIZE OR MAGNITUDE OF OPERATION	74
2.5	TOPOGRAPHY AND DRAINAGE	74
2.6	GEOLOGY	75
2.7	RESOURCES AND RESERVES	78
2.8	PROCESS DESCRIPTION AND TECHNOLOGY	87
2.9	CONCEPTUAL MINING PLAN / FINAL MINE CLOSURE PLAN	94
2.10	PROJECT REQUIREMENT	96
3	DESCRIPTION OF THE ENVIRONMENT	102
3.1	STUDY AREA, PERIOD COMPONENTS AND METHODALOGY	102
3.2	ESTABLISHMENT OF BASELINE FOR VALUED ENVIRONMENTAL COMPONENTS:	104
3.3	BASE MAP OF ALL ENVIRONMENTAL COMPONENTS	106
4	ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES	148
4.1	DETAILS OF INVESTIGATED ENVIRONMENTAL IMPACTS DUE TO PROJECT LOCATION POSSIBLE ACCIDENTS, PROJECT DESIGN, PROJECT CONSTRUCTION, REGULAR OPERATIONS FINAL DECOMMISSIONING OR REHABILITATION OF A COMPLETE PROJECT.	149
4.2	MEASURES FOR MINIMIZING AND /OR OFFSETTING ADVERSE IMPACTS IDENTIFIED	150
4.3	IRREVERSIBLE AND IRRETRIEVABLE COMMITMENTS OF ENVIRONMENTAL COMPONENTS	158
4.4	ASSESSMENT OF SIGNIFICANCE OF IMPACTS (CRITERIA FOR DETERMINING SIGNIFICANCE, ASSIGNING SIGNIFICANCE).	171
4.5	MITIGATION MEASURES	172
5	ANALYSIS OF ALTERNATIVES (TECHNOLOGY & SITES)	178
5.1	DESCRIPTION OF EACH ALTERNATIVE	178

5.2	SUMMARY OF ADVERSE IMPACTS OF EACH ALTERNATIVE	178
5.3	MITIGATION MEASURES PROPOSED FOR EACH ALTERNATIVE	178
5.4	SELECTION OF ALTERNATIVE	178
6	ENVIRONMENTAL MONITORING PROGRAMME	179
6.1	TECHNICAL ASPECTS OF THE MONITORING THE EFFECTIVENESS OF MITIGATION MEASURES (INCL MEASUREMENTS, METHODOLOGIES, FREQUENCY LOCATION DATA ANALYSIS, REPORTING SCHEDULES EMERGENCY PROCEDURES DETAILED BUDGET AND PROCUREMENT	179
	SCHEDULES)	
7	ADDITIONAL STUDIES	183
7.1	PUBLIC CONSULTATION	183
7.2	RISK ASSESSMENT & MANAGEMENT	183
7.3	DISASTER MANAGEMENT PLAN	186
7.4	CLUSTER MINE CLOSURE PLAN	188
7.5	SLOPE STABILITY PLAN	191
7.6	SLOPE STABILITY PLAN	191
8	PROJECT BENEFITS	193
9	ENVIRONMENTAL COST BENEFIT ANALYSIS	196
10	ENVIRONMENTAL MANAGEMENT PLAN	197
10.1	DESCRIPTION OF THE ADMINISTRATIVE ASPECTS OF ENSURING OF ENSURING THAT MITIGATIVE MEASURES ARE IMPLEMENTED AND THEIR EFFECTIVENESS MONITORED AFTER APPROVAL OF THE EIA	197
11	SUMMARY AND CONCLUSIONS	206
11.1	OVER ALL JUSTIFICATION FOR IMPLEMENTATION OF THE PROJECT	206
11.2	EXPLANATION OF HOW ADVERSE EFFECTS HAVE BEEN MITIGATED	210
12	DISCLOSURE OF CONSULTANTS ENGAGED	224

FIGURE LIST

FIGURE NO	TITLE	PAGE NO
1.1	SATELLITE IMAGE SHOWING PROPOSED ML AREA	52
1.2	ENVIRONMENTAL SETTING MAP	56
2.1	LOCATION MAP	65
2.2	GOOGLE IMAGE SHOWING PROJECT SITE	66
2.3	VILLAGE MAP SHOWING 300 M AND 500 M RADIUS	67
2.4	SITE CONNECTIVITY MAP	68
2.5	TOPO MAP - 10 KM RADIUS	71
2.6	LEASE PLAN OF THE PROJECT AREA	72
2.7	SITE PHOTOGRAPHS	73
2.8	GEOLOGY MAP OF PROJECT AREA	77
2.9	PROCESS FLOW DIAGRAM	78
2.10	YEAR WISE DEVELOPMENT AND PRODUCTION PLAN & SECTIONS	93
2.11	CONCEPTUAL PLAN	95
2.12	WATER BALANCE CHART	96
2.13	TRAFFIC STUDY MAP	98
3.1	ENVIRONMENTAL SETTING OF THE STUDY AREA	104
3.2	GOOGLE MAP SHOWING 50M INTERVAL MAP	107
3.2a	SATELLITE MAP	108
3.3	SEISMIC MAP OF INDIA	110
3.4	WIND ROSE PLOT DURING MARCH TO MAY 2025	111
3.5	BASE MAP OF AMBIENT AIR MONITORING LOCATIONS	113
3.6	GRAPHICAL REPRESENTATION OF AMBIENT AIR QUALITY DATA	115
3.7	BASE MAP OF GROUND WATER SAMPLING LOCATIONS	119
3.8	BASE MAP OF SURFACE WATER SAMPLING LOCATIONS	119
3.9	VALUES OF FEW COMMON PARAMETERS OF THE WATER ANALYSIS	122
3.10	VALUES OF FEW COMMON PARAMETERS IN SURFACE WATER ANALYSIS	122
3.11	BASE MAP OF NOISE MONITORING LOCATIONS	125
3.12	DAY EQUIVALENT VALUES IN 5 LOCATIONS	126
3.13	BASE MAP OF SOIL SAMPLING LOCATIONS	127
3.14	LAND USE/LAND COVER MAP OF THE STUDY AREA	137
3.15	VILLAGE MAP OF THE STUDY AREA	138
3.16	GENDER-WISE POPULATION DISTRIBUTION	139
3.17	GENDER WISE LITERACY DISTRIBUTION	140
3.18	OCCUPATIONAL STRUCTURE WITHIN BUFFER ZONE	140

Page **12** of **233**

3.19	10 KM RADIUS OF THE DRAINAGE MAP	144
3.20	10 KM RADIUS OF THE GEOLOGY MAP	145
3.21	10 KM RADIUS OF THE STUDY AREA GEOMORPHOLOGY MAP	145
3.22	10 KM RADIUS OF THE STUDY AREA SOIL TYPE MAP	146
3.23	CONTOUR MAP OF THE STUDY AREA	147
4.1	WATER BALANCE DIAGRAM	155
4.2	ISOPLETH OF GLC PREDICTION FOR PM2.5	165
4.3	ISOPLETH OF GLC PREDICTION FOR PM10	166
4.4	ISOPLETH OF GLC PREDICTION -CUMULATIVE FOR PM2.5	167
4.5	ISOPLETH OF GLC PREDICTION -CUMULATIVE FOR PM10	168
8.1	CER Letter	194
10.1	ORGANIZATION CHART	201

TABLE LIST

TABLE NO	TITLE	PAGE NO
1.1	Details of Quarries within 500m Radius	51
1.2	Project Identification	53
1.3	Details of Project Proponent	53
1.4	Brief Descriptions of the Project	54
1.5	Present Legal Status	58
2.1	BOUNDARY COORDINATES OF THE PROJECT SITE	65
2.2	MINE LEASE AREA AND ITS OWNERSHIP	67
2.3	SITE CONNECTIVITY	68
2.4	SALIENT FEATURES OF THE PROJECT	69
2.5	ENVIRONMENTAL SETTINGS OF THE PROJECT SITE	70
2.6	LAND USE PATTERN OF THE PROJCET AREA	74
2.7	AVAILABLE GEOLOGICAL RESOURCES	79
2.8	AVIALABLE MINEABLE RESERVES	83
2.9	MACHINERY DETAILS	88
2.10	DETAILS OF BLASTING	88
2.11	YEAR WISE PRODUCTION PLAN	90
2.12	ULTIMATE PIT DIMENSION	94
2.13	LAND USE PATTERN OF THE PROJECT SITE	94
2.14	WATER REQUIREMENT	96
2.15	DETAILS OF MANPOWER REQUIREMENT	97
2.16	Mineral Transportation	99
2.17	SUMMARY ON TRAFFIC VOLUME	100
2.18	MODIFIED LEVEL OF SERVICE	100
3.1	ENVIRONMENTAL SETTINGS OF THE STUDY AREA	102
3.2	RAINFALL DATA	109
3.3	AMBIENT AIR QUALITY MONITORING LOCATIONS	112
3.4	RESULTS OF AIR SAMPLING ANALYSIS	114
3.5	WATER SAMPLING LOCATIONS	118
3.6	SURFACE WATER ANALYSIS RESULTS	120

3.7	GROUND WATER ANALYSIS RESULTS	121
3.8	NOISE MONITORING RESULTS	125
3.9	RESULTS OF SOIL SAMPLE ANALYSIS	128
3.10	FLORA IN CORE ZONE	130
3.11	Flora in 300 m radius	131
3.12	List of Flora	132
3.13	List of Fauna	134
3.14	Land use pattern of the project site	135
3.15	Land use pattern of the Study area of 10 km radius	136
3.16	Population profile of the study area	138
4.1	GROUND WATER LEVEL STATUS	156
4.2	Rainwater Harvesting Plan	157
4.3	IMPACTS AND MITIGATION MEASURES FOR FAUNA	158
4.4	CONCENTRATIONS OF PM2.5 & PM10 AFTER PROJECT IMPLEMENTATION	169
4.5	NOISE LEVELS IN MONITORING LOCATIONS	171
4.6	IMPACTS ON HUMANS DUE TO VARIOUS MINING ACTIVITIES	175
6.1	ENVIRONMENTAL MONITORING SCHEDULE	180
6.2	IMPORTANT RECORDS TO BE MAINTAINED BY PP	182
6.3	ENVIRONMENTAL MANAGEMENT PLAN BUDGET	182
7.1	HAZARDS AND PRECAUTIONARY MEASURES	184
7.2	Details of Quarries within 500m radius	188
7.3	Salient Feature of Cluster Quarries	190
8.1	CER ACTIVITIES	195
10.1	ENVIRONMENTAL MANAGEMENT PLAN	198
10.2	ENVIRONMENTAL MANAGEMENT PLAN BUDGET	203

LIST OF ANNEXURES

S. NO	CONTENTS	ANNEXURE NO
1	TERMS OF REFERENCE (TOR)	1
2	PRECISE AREA COMMUNICATION LETTER	2
3	APPROVED MINING PLAN WITH PLATES	3
4	500-METER RADIUS LETTER	4
5	VAO CERTIFICATE	5
6	LAND DOCUMENT	6
7	MONITORING REPORT	7
8	LAB NABL CERTIFICATE	8
9	STRUCTURES LOCATED WITHIN 500M RADIUS OF THE PROJECT	9
10	10KM MAP SHOWING FOREST AND SANCTUARIES	10
11	CER Letter	11

COMPLIANCE TO TERMS OF REFERENCE

S.No	ToR Points	Reply	Pg. No
	plicability of Specific Conditions:	керіу	Pg. 140
1. Ap	In view of the particulars given in	Agreed	
1	the Para 1 above, the project proposal interalia including Form-1(Part A and B) were submitted to the SEIAA for an appraisal by the SEAC under the provision of EIA notification 2006 and its subsequent amendments.	Agreed	-
2	The above-mentioned proposal has been considered by SEIAA in the meeting held on 16.09.2025 The minutes of the meeting and all the Application and documents submitted [viz. Form-1 Part A, Part B] are available on PARIVESH portal which can be accessed by scanning the QR Code above.	Noted	
3	The State Expert Appraisal Committee (SEAC), based on the information & clarifications provided by the project proponent and after detailed deliberations on all technical aspects recommended the proposal for grant of Terms of Reference with public hearing under the provision of EIA Notification, 2006 and as amended thereof subject to the stipulation of specific and general conditions as detailed in Annexure (2).	Agreed	
4	The SEIAA has examined the proposal in accordance with the Environment Impact Assessment (EIA) Notification, 2006 & further amendments thereto and after accepting the recommendations of the SEAC hereby decided to issue the following Terms of Reference with public hearing for instant proposal of M/s. Shri Rajrudhra minerals private limited under the provisions of EIA Notification, 2006 and as amended thereof.	Noted	
	The Ministry/SEIAA-TN reserves the right to stipulate additional conditions, if found necessary.		

5	The Terms of Reference with public	Agreed	
	hearing to the aforementioned		
	project is under provisions of EIA		
	Notification, 2006. It does not		
	tantamount		
	approvals/consent/permissions etc.		
	required to be obtained under any		
	other Act/Rule/regulation. The		
	Project Proponent is under obligation		
	to obtain approvals /clearances		
	under any other Acts/ Regulations or		
	Statutes, as applicable, to the		
	project.		
6	This issues with the approval of the	Noted	
		Hoteu	
7	Competent Authority.	Agraad	
7	The TORs with public hearing	Agreed	
	prescribed shall be valid for a period		
	of three years from the date of		
	issue, for submission of the EIA/EMP		
	report as per OMNo.J-		
	11013/41/2006-IA-II(I)(part) dated		
	29th August, 2017.		
2	SEAC Conditions - Site Specific		
2.1	A Cluster Management Committee	A cluster management	
2.1	(CMC) shall be constituted	committee including all the	
	` '		
	including all the mines in the	proponents of the rough stone	
	cluster as Committee Members for	quarrying projects within the	
	the effective management of the	cluster of 500 m radius will be	
	mining operation in the cluster	constituted for the effective	
	through systematic & scientific	implementation of appropriate	
	approach with appointment of	environmental management	
	statutory personnel, appropriate	plan. Affidavit in this regard will	
	environmental monitoring, good	be submitted during final	
	maintenance of haul roads and	EIA/EMP Report.	
	village/panchayat roads,	· '	
	authorized blasting operation etc.		-
	The PP shall submit the following		
	details in the form of an Affidavit		
	during the EIA appraisal:		
	(i) Copy of the agreement		
	forming CMC.		
	(ii) The Organisation chart of the		
1	ı (II) THE OLUANISALION CHAFL OLUNE I		
			l l
	Committee with defining the		
	Committee with defining the role of the members		
	Committee with defining the role of the members (iii) The 'Standard Operating		
	Committee with defining the role of the members		

2	The Boundary pillars to be erected as per the mine rules and the evidence should be submitted along with the EIA report.	Agreed. Proof photographs for erected pillars will be submitted in the Final EIA / EMP Report.	-
3	The details of enumeration of structures including schools, colleges, primary health centres should be submitted along with the EIA report.	There is one crusher unit, four windmills, and two sheds situated within a 300-meter radius. There are no schools, temples, or inhabited villages within a 300-meter radius. Enumeration study details are elaborated in Chapter 3.	-
4	The structures within the radius of (i) 50 m, (ii) 100 m, (iii) 200 m and (iv) 300 m & upto 1km shall be enumerated with details such as dwelling houses with number of occupants, whether it belongs to the owner (or) not, places of worship, industries, factories, sheds, etc. and spell out the mitigation measures to be proposed for the protection of the above structures, if any during the quarrying operations.	A Site survey has been conducted to identify and list structures located within a 300 m radius from the proposed Quarry and structures located within 300 m radius are given in section 3.5 of Chapter 3. Structures details from 300 m to 1 km will be incorporated in the Final EIA / EMP Report.	Complied. Enclosed as Annexure 10.
5	The proponent shall furnish photographs of adequate fencing, garland drainage built with siltation tank & green belt along the periphery including replantation of existing trees; maintaining the safety distance between the adjacent quarries & water bodies nearby provided as per the approved mining plan.	The green belt, fencing, garland drain work are in process and the proof photographs of the same will be submitted in the Final EIA/EMP Report. There are no permanent structures within a 50-meter radius of the proposed project site, and a safety distance of 7.5 meters along the boundary has been provided. There is odai passing on east side and is 80m away from the area. Map showing the Safety distance is given in Figure 2.2 of Chapter 2.	-
6	The Proponent shall carry out Bio diversity study as a part of EIA study and the same shall be included in the Report.	The bio diversity study has been carried out by our FAE is given in section 3.7.7 of Chapter 3.	117

7	The PP shall prepare the EMP for	A detailed Environmental	
	the entire project life of mine, i.e,	Management Plan has been	
	10 years and also furnish the	prepared and are detailed in	
	sworn affidavit stating to abide	chapter 10. Affidavit stating to	-
	the EMP for the entire life of mine.	abide the EMP for the entire life	
		of mine will be incorporated in	
		the Final EIA / EMP Report.	
8	The PP shall carry out the	cumulative impact study due to	
	comprehensive studies on the	mining operations in cluster are	
	cumulative environmental impacts	given in Section 7.4 of Chapter	
	of the existing & proposed	7. Anticipated impacts and its	-
	quarries which included drilling &	mitigation measures for various	
	blasting, loading & hauling on the	attributes are detailed in	
	surrounding village and	Chapter 4.	
	structures.		
9	The PP shall prepare a conceptual	Agreed. Will be complied.	
	action plan accommodating the		
	inclusion of haul road accessibility		
	keeping the benches intact, by		-
	ensuring the slope stability of the		
	working benches to be constructed		
	and existing quarry wall.		
10	The PP shall install the CCTV camera	Agreed, The PP will install CCTV	
	for the continuous surveillance of	at the proposed mine lease area	
	mining activity & furnish the	and submit proof in the Final	_
	photographic/ videographic evidence	EIA/EMP report.	
	along with the EIA report.		
3	SEAC Standard Condition		
	To the case of eviation/execution		
	In the case of existing/operation		
	mines, a letter obtained from the		
	concerned AD (Mines) shall be		
	submitted and it shall include the		
	following:		
	(i) Original pit dimension		
	(ii) Quantity achieved Vs EC		
	Approved Quantity		
	(iii) Balance Quantity as per	A small quarry pit exists in	
	Mineable Reserve	applied area which was operated	
1	calculated	by some other lessee before	-
	(iv) Mined out Depth as on	2015. CCR is not applicable.	
	date Vs EC Permitted	2013. CCN is not applicable.	
	depth		
	(v) Details of illegal/illicit		
	mining		
	(vi) Violation in the quarry		
	during the past working		
1	(vii) Quantity of material mined		
	out outside the lining lease		1
	out outside the lining lease area		

	/ ···		
	 (viii) Condition of Safety zone/benches (ix) Revised/Modified Mining Plan showing the benches of not exceeding 6m height and ultimate depth of not exceeding 50m. 		
2	Details of habitations around the proposed mining area and latest VAO Certificate regarding the location of habitations within 300m radius from the periphery of the site.	There are no historical places, schools, cemeteries, temples, bird sanctuaries, and wildlife sanctuaries within 300 meters of the proposed project area. In this regard, the project proponent has received an official letter from the Village Administrative Officer, The letter copy enclosed as Annexure – 4.	Enclosed as Annexure 5
3	The proponent is requested to carry out a survey and enumerate on the structures located within the radius of (i) 50 m, (ii) 100 m, (iii) 200 m and (iv) 300 m (v) 500m shall be enumerated with details such as dwelling houses with number of occupants, whether it belongs to the owner (or) not, places of worship, industries, factories, sheds, etc with indicating the owner of the building, nature of construction, age of the building, number of residents, their profession and income, etc.	A Site survey has been conducted to identify and list structures located within a 300 m radius from the proposed Quarry and structures located within 300 m radius are given in section 3.5 of Chapter 3. Structures details from 300 m to 1 km will be incorporated in the Final EIA / EMP Report.	Enclosed as Annexure 10.
4	The PP shall submit a detailed hydrogeological report indicating the impact of proposed quarrying operations on the water bodies like lake, water tanks, etc are located within 1 km of the proposed quarry.	A detailed hydro-geological report will be included in the Final EIA Report.	-
5	The Project Proponent shall carry out Bio-diversity study through reputed institution and the same shall be included in the EIA report.	The bio diversity study has been carried out by our FAE is given in section 3.7.7 of Chapter 3.	117
6	The DFO letter stating that the proximity distance of Reserve Forests, Protected Areas, Sanctuaries. Tiger reserve etc. upto a radius of 25 km from the proposed site.	The DFO letter will be incorporated in the Final EIA/EMP Report.	-

7	In case of proposed lease in an existing (or old) quarry where the benches are not formed(or) partially formed as per the approved Mining Plan, the Project Proponent (PP) shall the PP shall carry out the scientific studies to assess the slope stability of the working benches to be constructed and existing quarry wall, by involving any one of the reputed Research and Academic institutions-CSIR Central Institute of Mining & Fuel Research/Dhanbad, NIRM/Bangalore, Division of Geotechnical Engineering-IIT-Madras, NIT-Dept of Mining Engg, Suratkal and Anna University Chennai-CEG Campus. The PP shall submit a copy of the aforesaid report indicating the stability status of the quarry wall and possible mitigation measures during the time of appraisal for obtaining the EC.	applie by so 2015. pit di	d area wome oth CCR is remension wed mini	hich was er lesso not appli mentior	exists in soperated ee before cable. The led in the lis given Depth (Max) in (m) 17	-
8	However, in case of the fresh/virgin quarries, the project shall submit a conceptual 'Slope Stability Plan' for the proposed quarry during the appraisal while obtaining the EC, when the depth of the working is extended beyond 30m below ground level.	carrie	stability d out o reaches	once th	will be ne quarry	-
9	The PP shall furnish the affidavit stating that the blasting operation in the proposed quarry is carried out by the statutory competent person as per the MMR 1961 such as blaster, mining mate, mine foreman, II/I Class mines manager appointed by the proponent	the Fi	nal EIA R	eport	porated in	-
10	The PP shall present a conceptual design for carrying out only controlled blasting operation involving line drilling and muffle blasting in the proposed quarry such that the blast induced ground vibrations are controlled as well as no fly rock travel beyond 30 m from the blast site	using optim be im The paran	delay um char oplemente details	detona ge per ed in th on e given	techniques tors and delay will his quarry. blasting in section	-

11	The EIA Coordinators shall obtain and furnish the details of quarry/quarries operated by the proponent in the past, either in the same location or elsewhere in the State with video and photographic evidences.		details to time of fina			1
12	If the proponent has already carried out the mining activity in the proposed mining lease area after 15.01.2016, then the proponent shall furnish the following details from AD/DD, mines					-
13	What was the period of the operation and stoppage of the earlier mines with last work permit issued by the AD/DD mines?	app by 201	small quar lied area w some oth 5. CCR is r ting pit dim	hich was er lesse ot appli	operated ee before cable. The	-
14	 Quantity of minerals mined out. Highest production achieved in any one year. Detail of approved depth of mining. Actual depth of the mining achieved earlier. Name of the person already mined in that leases area. If EC and CTO already obtained, the copy of the same shall be submitted. Whether the mining was carried out as per the approved mine plan (or EC if issued) with stipulated benches 	in t	he approven below. length (Max) in(m) 101			-
15	All comer coordinates of the mine lease area, superimposed on a High-Resolution Imagery/Topo sheet, topographic sheet, geomorphology, lithology and geology of the mining lease area should be provided. Such an Imagery of the proposed area should clearly show the land use and other ecological features of the study area (core and buffer zone).	ima - 2. The map No.3 The Figu The show	ect erimposed gery and g 2 in Chapte geology ar 3.24, 3.25 (Soil map are No. 3.26 10km Ra wing buffer are No.3.1 pter – 3.	in iven as er – 3. and geom ovided Chapter is provided G, Chapter adius Ir cone is	norphology in Figure 3. ded under er-3. ndex plan s given in	64 135 & 136 137 93 97

16	The PP shall carry out Drone video survey covering the cluster, green belt, fencing etc.,	The Drone survey will be caried out after commencement of the project operation.	-
17	The proponent shall furnish photographs of adequate fencing, greenbelt along the periphery including replantation of existing trees & safety distance between the adjacent quarries & water bodies nearby provided as per the approved mining plan	There are no trees within ML area. Fencing and plantations are under process. Greenbelt / Plantation will be carried out in the safety zone to enhance the vegetative growth and aesthetic in the safety zone area. In the post mining stage, an area of 1.61.00 Ha will be under greenbelt and plantation.	-
18	The Project Proponent shall provide the details of mineral reserves and mineable reserves, planned production capacity, proposed working methodology with justifications, the anticipated impacts of the mining operations on the surrounding, environment and the remedial measures for the same.	The geological reserves are estimated to be rough stone 1,11,59,390 m³ and Gravel - 2,38,210 m³ (82 m BGL). The mineable reserves of rough stone 57,26,860 m³ and Gravel - 2,15,410 m³ (82 m BGL). The proposed total production quantity (Five years) is rough stone 57,26,860 m³ and Gravel - 2,15,410 m³ (82 m BGL). Working methodology with justification details are given in Chapter 2.	76
19	The Project Proponent shall provide the Organization chart indicating the appointment of various statutory officials and other competent persons to be appointed as per the provisions of Mines Act'1952 and the MMR" 1961 for carrying out the quarrying operations scientifically and systematically in order to ensure safety and to protect the environment.	Complied. Please refer Fig. 10.1	188

20	The Project Proponent shall conduct the Hydro-geological study considering the contour map of the water table detailing the number of ground water pumping & open wells, and surface water bodies such as rivers, tanks, canals, ponds etc. within 1 km (radius) along with the collected water level data for both monsoon and non-monsoon seasons from the PWD/TWAD so as to assess the impacts on the wells due to mining activity. Based on actual monitoring data, it may clearly be shown whether working all intersect ground water. Necessary data and documentation in this regard may be provided.	The hydrogeological study from a reputed institute is in progress and it will be incorporated in the final EIA report.	-
21	The proponent shall furnish the baseline data for the environmental and ecological parameters with regard to surface water/ground water quality, air quality, soil quality& flora/fauna including traffic/vehicular movement study.	The baseline data for all environments is collected for the Summer season (March to May 2025).	95
22	The Proponent shall carry out the cumulative impact study due to mining operations carried out in the quarry specifically with reference to the specific environment in terms of air pollution, water pollution, & health impacts. Accordingly, the Environment Management plan should be prepared keeping the concerned quarry and the surrounding habitations in the mind.	Detailed cumulative impact study has been carried and the same is incorporated in the Chapter 4. Accordingly, a detailed Environment Management Plan is prepared considering air, water, noise and soil environment and the details are given in Chapter 10.	184
23	Rain water harvesting management with recharging details along with water balance (both monsoon & non-monsoon) be submitted.	Rain water harvesting Plan is given in chapter 4.	-

_			
24	Land use of the study area delineating forest area, agricultural land, grazing land. Wildlife sanctuary, national park, migratory routes of fauna, water bodies, human settlements and other ecological features should be indicated. Land use plan of the mine lease area should be prepared to encompass preoperational, operational and post operational phases and submitted. Impact, if any, of change of land use should be given.	Land use of the study area delineating forest area, agricultural land, grazing land, wildlife sanctuary, national park, migratory routes of fauna, water bodies, human settlements and other ecological features has been discussed in Section 3.7.6 of Chapter 3. details of surrounding ecological sensitive features have been provided in Table 3.1 under Chapter 3. Land use plan of the project area showing pre-operational, operational and post-operational phases are discussed in Table 2.4 under Chapter 2.	119
25	Details of the land for storage of Overburden/Waste Dumps (or) Rejects outside the mine lease, such as extent of land area distance from mine lease, its land use, R&R issues, if any, should be provided.	Not Applicable. No dumps have been proposed outside the lease area. There is no overburden / waste generation from this quarry, the entire mined out minerals will be directly transported to the needy buyers.	-
26	Proximity to Areas declared as' Critically Polluted'(or) the Project areas which attracts the court restrictions for mining operations, should also be indicated and where so required, clearance certifications from the prescribed Authorities, such as the TNPCB (or) Dept. of Geology and Mining should be secured and famishedto the effect that the proposed mining activities could be considered.	No proximity to Critically polluted areas.	-
27	Description of water conservation measures proposed to be adopted in the Project should be given. Details of rainwater harvesting proposed in the Project, if any, should be provided.	The impact of the mining operations due to this quarry on water environment is studied and mitigation measures are proposed. Rain water harvesting plan is given Chapter 4.	-
28	Impact on local transport infrastructure due to the Project should be indicated	A traffic density study was carried out and are detailed in section 2.12 of Chapter 2.	-

29	A tree survey shall be carried out (Nos. name of species, age, diameter, etc) both within the mining lease applied area & 300m buffer zone and its management during mining activity	The details on tree survey covering 300 m radius is given in section 3.7.7 of chapter 3.	-
30	A detailed mine closure plan for the proposed project shall be included in EIA/EMP report which should be site-specific	The mine closure plan details are given in section 2.10 of Chapter 2 and section 7.6 of Chapter 7.	179
31	As part of the study of flora and fauna around the vicinity of the proposed site, the EIA Coordinator shall strive to educate the local students on the importance of preserving local flora and fauna by involving them in the study, where ever possible	Accepted. It will be done.	-
32	The purpose of green belt around the project is to capture the fugitive emissions, carbon sequestration and to attenuate the noise generated, in addition to improving the aesthetics. A wide range of indigenous plant species should be planted as given in the appendix – I in consultation with the DFO, State Agriculture University and local school/college authorities. The plant species with dense/moderate canopy of native origin should be chosen. Species of small/medium/tall trees alternating with shrubs should be planted in a mixed manner.	Green belt is proposed in an area of 1.61.00 ha. Green belt development plan provided is given in Chapter 4.	143
33	Taller/one year old saplings raised in appropriate size of bags; preferably eco-friendly bags should be planted as per the advice of local forest authorities/botanist/horticulturist with regard to site-specific choices. The proponent shall earmark the green belt area with GPS coordinates all along the boundary of the project site with at least 3 m wide and in between blocks in an organized manner	The FAE of ecology and biodiversity has advised the project proponent that saplings of one year old raised in the ecofriendly bags should be purchased and planted with the spacing of 3 m between each plant around the proposed project area as per the advice of local forest authorities/botanist.	-

34	A Disaster management Plan shall be prepared and included in the EIA/EMP Report for the complete life of the proposed quarry (or) till the end of the lease period.	A disaster management plan is prepared and the details are given in Chapter 7.	177
35	A risk assessment and Management plan shall be prepared and included in the EIA/EMP report for the complete life of the proposed quarry or till the end of the lease period	Risk assessment and its management is given in Chapter 7.	173
36	Occupational Health impacts of the Project should be anticipated and the proposed preventive measures spelt out in detail. Details of pre-placement medical examination and periodical medical examination schedules should be incorporated in the EMP. The project specific occupational health mitigation measures with required facilities proposed in the mining area may be detailed.	Occupational Health Impacts of the project and preventive measures are detailed under Chapter 4.	164
37	Public health implications of the Project and related activities for the population in the impact zone should be systematically evaluated and the proposed remedial measures should be detailed along with budgetary allocations.	No major impact on public health will be there since the villages are located more than 1km from the lease area. Details of CER and CSR are discussed under Chapter No. 8	-
38	The Socio-economic studies should be carried out within a 5km buffer zone from the mining activity. Measures of socio-economic significance and influence to the local community proposed to be provided by the Project Proponent should be indicated. As far as possible, quantitative dimensions may be given with time frames for implementation.	Socio economic study is conducted both by visits and secondary data collection. Details are given in Chapter 3	128
39	Details of litigation pending against the project, if any, with direction /order passed by any Court of law against the Project should be given.	No litigation is pending	-

40	Benefits of the Project if the Project is implemented should be spelt out. The benefits of the Project shall clearly indicate environmental, social, economic, employment potential, etc.	Benefits of the project is given in Chapter 8	181
41	If any quarrying operations were carried out in the proposed quarrying site for which now EC is sought, the project proponent shall furnish the detailed compliance to EC conditions given in the previous EC with the site photographs which shall duly be certified by MoEF & CC, Regional Office, Chennai or the concerned DEE/TNPCB.	A small quarry pit exists in applied area which was operated by some other lessee before 2015. CCR is not applicable. The existing pit dimension mentioned in the approved mining plan is given below. Pit	-
42	The PP shall prepare the EMP for the entire life of mine and also furnish the sworn affidavit stating to abide the EMP for the entire life of mine.	The EMP is planned for the entire life of the mine. The affidavit for the same will be included in the Final EIA/EMP Report.	-
43	Concealing any factual information or submission of false/fabricated data and failure to comply with any of the condition mentioned above may result in withdrawal of this Terms of Conditions besides attracting penal provisions in the Environment (Protection) Act, 1986	Agreed	-
3. Sei	iaa Specific Conditions		
3.1	The Authority noted that the subject was placed in the 611th meeting of SEAC-II held on 29.08.2025. After detailed discussions, the Authority accepts the recommendation of SEAC-II and decided to grant Terms of Reference (ToR) along with Public Hearing for the quantity of 57,26,860m3 of Rough Stone and 2,15,410m3 of Gravel up to the depth of 82m BGL. The annual peak production is 11,63,350m3 of Rough Stone and 1,15,488m3 of gravel as per the approved	Agreed	

	mining plan, under cluster for undertaking the combined Environment Impact Assessment Study and preparation of separate Environment Management Plan subject to the conditions as recommended by SEAC-II & normal conditions & the SEIAA Standard conditions.		
4.0 0	Cluster Management Committee		
1	Cluster management committee shall be framed which must include all the proponents in the cluster as members including the existing as well as proposed quarry.	There are four quarries (2 - Existing + 2 Proposed) including this proposal within a 500-metre radius. The proponent will take the initiative to form a cluster management committee once environmental clearance is obtained for this quarry as well as the other proposed quarry.	
2	The members must coordinate among themselves for the effective implementation of EMP as committed including Green Belt Development, Water sprinkling, tree plantation, blasting etc.,	Agreed. Will be complied.	-
α	The List of members of the committee formed shall be submitted to AD/Mines before the execution of mining lease and the same shall be updated every year to the AD/Mines.	Agreed. The list of members of the committee formed will be submitted to AD/mines after obtaining Environmental Clearance.	1
4	Detailed Operational Plan must be submitted which must include the blasting frequency with respect to the nearby quarry situated in the cluster, the usage of haul roads by the individual quarry in the form of route map and network.	Agreed. Details of the Operation plan for cluster mining operations will be submitted once we get environmental clearance for all quarries proposed in the cluster area.	-
5	The committee shall deliberate on risk management plan pertaining to the cluster in a holistic manner especially during natural calamities like intense rain and the mitigation measures considering the inundation of the cluster and evacuation plan.	Risk management plan for the individual quarry is given in this report. As far as cluster working condition is concerned, once the committee is formed, risk management as a cluster including inundation of clusters and the evacuation plan will be elaborated and the same will be submitted to the EIA.	-

6	The Cluster Management Committee shall form Environmental Policy to practice sustainable mining in a scientific and systematic manner in accordance with the law. The role played by the committee in implementing the Environmental policy devised shall be given in detail in the EIA Report.	Environmental policy for the cluster will be framed by the cluster management committee and the policy will be in accordance with EPA Act, 1986 and its amendments, guidelines by MoEF&CC/SEIAA and other regulatory bodies. This policy will be displayed in the quarry.	-
7	The committee shall furnish action plan regarding the restoration strategy with respect to the individual quarry falling under the cluster in a holistic manner.	Agreed. It will be complied as mentioned in the Point No.4	-
8	The committee shall deliberate on the health of the workers/staff involved in the mining as well as the health of the public in the vicinity.	Agreed. It will be complied as mentioned in the Point No.4.	-
	Agriculture & Agro-Biodiversity		
9	Impact on surrounding agricultural fields around the proposed mining Area.	There are no Agriculture, forest area and traditional practices within the project area. However, there are some agricultural land around the project site. It may be affected due to the quarry operation as such dust particles sedimentation in the agricultural land. It will be controlled at the source level by proper dust suppression as such wet drilling, controlled blasting and water sprinkling on the project roads and project surrounding roads. As per Air Quality Modelling, the impact of the air quality limited to 400m radius. So, there is no impact for the Agriculture, Forestry & Traditional practices located within 10km radius.	-
10	Impact on soil flora & vegetation around the project site.	The chemical and physical characteristics of the soil is given in Table 3.7.5 of Chapter 3. The anticipated impact and its mitigation measures for soil environment and biological environment are detailed in section 4.2.2 & 4.4.5 of Chapter 4 respectively.	116

11	Details of type of vegetations including no. of trees & shrubs within the proposed mining area and. If so, transplantation of such vegetations all along the boundary of the proposed mining area shall committed mentioned in EMP.	There is no standing trees or vegetation within the mine lease area.	117
12	The Environmental Impact Assessment should study the biodiversity, the natural ecosystem, the soil micro flora, fauna and soil seed banks and suggest measures to maintain the natural Ecosystem.	The ecological details have been provided in Section 3.7.7 under Chapter 3 and measures have been provided in Section 4.4.5 under Chapter 4.	117
13	Action should specifically suggest for sustainable management of the area and restoration of ecosystem for flow of goods and services.	All the essential environmental protective measures will be followed by the proponent to manage the surrounding environment and restore the ecosystem, as discussed in Chapter 4.	117
14	The project proponent shall study and furnish the impact of project on plantations in adjoining patta lands, Horticulture, Agriculture and livestock.	The impact of project on the land environment has been discussed in Section 4.2.1 under Chapter 4.	117
Fores	sts		
15	The project proponent shall detailed study on impact of mining on Reserve Forests free ranging wildlife.	There only one R.F in buffer zone of the project i.e. Dalavaipattinam R.F. – 6.8km(N). □and there are no No R.F in 1 km radius of the project site.	91
16	The Environmental Impact Assessment should study impact on forest, vegetation, endemic, vulnerable and endangered indigenous flora and fauna.	The impacts of the project on biological environment is given in section 4.4.5 under Chapter 4.	117
17	The Environmental Impact Assessment should study impact on standing trees and the existing trees should be numbered and action suggested for protection.	There are no standing trees within lease area.	-
18	The Environmental Impact Assessment should study impact on protected areas, Reserve Forests, National Parks, Corridors and Wildlife pathways, near project site.	No R.F within 1 km radius and there is no, National Parks, Corridors and Wildlife pathways.	-

Wate	r Environment		
19	Hydro-geological study considering the contour map of the water table detailing the number of ground water pumping & open wells, and surface water bodies such as rivers, tanks, canals, ponds etc. within 1 km (radius) so as to assess the impacts on the nearby waterbodies due to mining activity. Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided, covering the entire mine lease period.	The hydrogeological study from a reputed institute is in progress and it will be incorporated in the Final EIA report.	
20	Erosion Control measures.	There is no waste generation (OB) in this quarry has been envisaged. However, there may be erosion due to rainy season and that is limited within quarry area. The control measures are explained in Chapter 4.	
21	Detailed study shall be carried out in regard to impact of mining around the proposed mine lease area on the nearby Villages, Water-bodies/ Rivers, & any ecological fragile areas.	Complied. The study details are incorporated in Chapter 3. Anticipated impacts and its mitigation measures are detailed in Chapter 4.	
22	The project proponent shall study impact on fish habitats and the food WEB/ food chain in the water body and Reservoir.	There is no wastewater generation from this Quarry, so this is not applicable.	-
23	The project proponent shall study and furnish the details on potential fragmentation impact on natural environment, by the activities.	Fragmentation impact on environment may be due to drilling and blasting. The anticipated impacts and mitigation measures are discussed in Chapter 4.	
24	The project proponent shall study and furnish the impact on aquatic plants and animals in water bodies and possible scars on the landscape, damages to nearby caves, heritage site, and archaeological sites possible land	The Flora and Fauna study covering 10 km radius are detailed in section 3.7.7 of chapter 3. The impacts anticipated with respect to the environment of the project area is very	117

	form changes visual and aesthetic impacts.	negligible and it will be minimized within the project area. Greenbelt / Plantation will be carried out to enhance the vegetative growth and aesthetic in the safety zone area.		
25	The Terms of Reference should specifically study impact on soil health, soil erosion, the soil physical, chemical components and microbial components.	The impact of mining on soil environment has been discussed in Section 4.2.2 under Chapter 4.	-	
26	The Environmental Impact Assessment should study on wetlands, water bodies, rivers streams, lakes and farmer sites.	The anticipated impact and its mitigation measures for Water Environment are detailed in section 4.2.3 of Chapter 4.	92	
27	The EIA shall include the impact of mining activity on the following: a) Hydrothermal/Geothermal effect due to destruction in the Environment. b) Bio-geochemical processes and its foot prints including Environmental stress. c) Sediment geochemistry in the surface streams.	The proposed quarry operation is Opencast Mechanized operation with drilling, blasting, excavation, loading and transportation. So, the effect of Hydrothermal/Geothermal is not envisaged. This is a simple mining operation, so bio-geochemical processes are not envisaged. Due to mining operation, there may be minimum impact to the nearby water bodies due to dust sedimentation. It will be controlled by wet drilling, water sprinkling and plantation.	92	
Energ	JY			
28	The measures taken to control Noise, Air, Water, Dust Control and steps adopted to efficiently utilize the Energy shall be furnished.	The measures taken to control noise, air, water, and dust have been given under Chapter 4.	141	
Climate Change				
29	The Environmental Impact Assessment shall study in detail the carbon emission and also suggest the measures to mitigate carbon emission including development of carbon sinks and temperature reduction including control of other emission and climate mitigation activities.	The carbon emission and the measures to mitigate carbon emission have been discussed in Section 4.4.5 under Chapter. Only the best equipment will be used, and it will be properly and regularly maintained. Regular vehicular emission tests will be conducted on the	141	

30	The Environmental Impact Assessment should study impact on climate change, temperature rise,	transport vehicles to ensure minimal carbon emissions. To further reduce carbon	
	pollution and above soil & below soil	emissions, a good greenbelt	141
	carbon stock, soil health and	plan has been planned.	141
	physical, chemical &	pian nas been pianned.	
	Biological soil features.		
31	Impact of mining on pollution		
31	leading to GHGs emissions and the		
	impact of the same on the local		141
	livelihood.		
Mine	Closure Plan		
32	Detailed Mine Closure Plan	Complied. Mine Closure Plan	
52	covering the entire mine lease	has been incorporated in the	
	period as per precise area	approved Mining Plan and the	179
	communication order issued.	same is incorporated in the	173
	communication order issued.	Chapter 7.	
EMP		Chapter 71	
33	Detailed Environment	Complied. The details are	
	Management Plan along with	described in Chapter 10.	
	adaptation, mitigation & remedial	·	184
	strategies covering the entire		
	mine lease period as per precise		
	area communication order issued.		
34	The Environmental Impact	Complied. The details are	
	Assessment should hold detailed	described in Chapter 10.	
	study on EMP with budget for	•	190
	Green belt development and mine		190
	closure plan including disaster		
	management plan.		
Risk A	Assessment		
35	To furnish risk assessment and	Complied. The details are	
	management plan including	described in Chapter 7.	
	anticipated vulnerabilities during	·	174
	operational and post operational		
	phases of Mining.		
Disas	ter Management Plan		
36	To furnish disaster management	Complied. The details are	
	plan and disaster mitigation	described in Chapter 7.	
	measures in regard to all aspects		
	to avoid/reduce vulnerability to		
	hazards & to cope with		
	disaster/untoward accidents in &		177
	around the proposed mine lease		1//
	area due to the proposed method		
	of mining activity & its related		
	activities covering the entire mine		
	lease period as per precise area		
	communication order issued.		

Others			
37	The project proponent shall furnish VAO certificate with reference to 300m radius regard to approved habitations, schools, Archaeological sites, Structures, railway lines, roads, water bodies such as streams, odai, vaari, canal, channel, river, lake pond, tank etc.	There are no historical places, schools, cemeteries, temples, bird sanctuaries, and wildlife sanctuaries within 500 meters of the proposed project area. In this regard, the project proponent has received an official letter from the Village Administrative Officer, The letter copy enclosed as Annexure – 4.	-
38	As per the MoEF& CC office memorandum F.N0.22-65/2017-1A.11I dated: 30.09.2020 and20.10.2020 the proponent shall address the concerns raised during the public consultation and all the activities proposed shall be part of the Environment Management Plan.	Noted. The concerns raised during the public consultation and all the activities proposed will be updated in the final EIA report.	-
39	The project proponent shall study and furnish the possible pollution due to plastic and microplastic on the environment. The ecological risks and impacts of plastic & microplastics on aquatic environment and fresh water systems due to activities, contemplated during mining may be investigated and reported.	Complied. The PP has framed detail solid waste management system for the project are and the same will be executed by proper awareness and sign boards. The sign boards will be in two language i.e., Vernacular language (Tamil) and common language (English). The plastic waste generation is very negligible and it will be collected from the source level in specific dustbin and disposed through the municipal bins.	-
Standard Terms of Reference for (Mining of minerals)			
1.1	Year-wise production details since 1994 should be given, clearly stating the highest production achieved in any one year prior to 1994. It may also be categorically informed whether there had been any increase in production after the EIA Notification 1994 came into force, w.r.t. the highest production achieved prior to 1994	A small quarry pit exists in applied area which was operated by some other lessee before 2015. CCR is not applicable.	-

1.2	A copy of the document in support of the fact that the Proponent is the rightful lessee of the mine should be given	This proposed project area is classified as Patta land registered in the name of Applicant (M/s. Shri Rajrudhra Minerals Private Limited) vide patta no. 2059, 2700, 2663, 2530 and 2250.	-
1.3	All documents including approved mine plan, EIA and Public Hearing should be compatible with one another in terms of the mine lease area, production levels, waste generation and its management, mining technology etc. and should be in the name of the lessee	Noted & agreed. All documents including approved mine plan, EIA and Public Hearing are compatible with one another in terms of the mine lease area, production levels, waste generation and its management, mining technology etc. and is in the name of the lessee.	-
1.4	All corner coordinates of the mine lease area, superimposed on a High Resolution Imagery/ toposheet, topographic sheet, geomorphology and geology of the areashould be provided. Such an Imagery of the proposed area should clearly show the land use and other ecological features of the study area (core and buffer zone)	Project coordinates superimposed in satellite imagery and given as Figure No – 2.1 in Chapter – 2. The geology and geomorphology map are provided in Figure No.3.24, 3.25 Chapter 3. The Soil map is provided under Figure No. 3.26, Chapter-3. The 10km Radius Index plan showing buffer zone is given in Figure No.3.1 & Figure 3.2 in Chapter – 3.	64 135 & 136 137 93 97
1.5	Information should be provided in Survey of India Toposheet in 1:50,000 scale indicating geological map of the area, geomorphology of land forms of the area, existing minerals and mining history of the area, important water bodies, streams and rivers and soil characteristics	The following map in 1:50,000 Scale: Geology map of the project area covering 10km radius – Figure No. 3.17. Geomorphology Map of the Study Area covering 10 km radius – Figure No. 3.18. Drainage map – 3.16	119
1.6	Details about the land proposed for mining activities should be given with information as to whether mining conforms to the land use policy of the State; land diversion for mining should have approval from State land use board or the concerned authority	(a) Precise Area Communication: The Project Proponent has obtained Precise Area Communication from the Assistant Director, Department of Geology and Mining, Dindigul, vide Rc.No. 587/2025 (Kanimam) dated 28.07.2025. The letter copy enclosed as Annexure – 2.	-

		(b) Mining Plan Approval: The project proponent has prepared mining plan under rule L9(I),41 &42 of Tamil Nadu Minor Mineral Concession Rules, 1959 and the same has been approved by the Assistant Director, Dept. of Geology & Mining, Dindigul vide Rc.No.587 / 2025 / Mines, Dated 07.08.2025. The approval letter along with approved plan is enclosed as Annexure – 3.	
1.7	It should be clearly stated whether the proponent Company has a well laid down Environment Policy approved by its Board of Directors? If so, it may be spelt out in the EIA Report with description of the prescribed operating process/procedures to bring into focus any infringement/deviation/violation of the environmental or forest norms/ conditions? The hierarchical system or administrative order of the Company to deal with the environmental issues and for ensuring compliance with the EC conditions may also be given. The system of reporting of non compliances / violations of environmental norms to the Board of Directors of the Company and/or shareholders or stakeholders at large, may also be detailed in the EIA Report.	Environmental policy for the cluster will be framed by the cluster management committee and the policy will be in accordance with EPA Act, 1986 and its amendments, guidelines by MoEF&CC/SEIAA and other regulatory bodies. This policy will be displayed in the quarry.	-
1.8	Issues relating to Mine Safety, including subsidence study in case of underground mining and slope study in case of open cast mining, blasting study etc. should be detailed. The proposed safeguard measures in each case should also be provided	Risks are identified and the management is given in Chapter 7.	173
1.9	The study area will comprise of 10 km zone around the mine lease from lease periphery and the data contained in the EIA such as waste generation etc. should be for the life of the mine / lease period.	Noted & Agreed The study area considered for this study is 10 km radius and all data contained in the EIA report such as waste generation etc., is for the Life of the Mine / lease period	90

1.10	Land use of the study area delineating forest area, agricultural land, grazing land, wildlife sanctuary, national park, migratory routes of fauna, water bodies, human settlements and other ecological features should be indicated. Land use plan of the mine lease area should be prepared to encompass preoperational, operational and post operational phases and submitted. Impact, if any, of change of land use should be given	The land use of the study area was studied to demarcate various LULC categories and its details are provided under section 3.7.6. Of Chapter-3. The land use pattern at present and at the end of the quarrying period has been provided in Table 2.4, Chapter-2. The Conceptual plan of mine lease area is shown in Figure No-2.10.	97
1.11	Details of the land for any Over Burden Dumps outside the mine lease, such as extent of land area, distance from mine lease, its land use, R&R issues, if any, should be given	The entire material quarried out will be sold. No waste generation from this quarrying operation.	-
1.12	A Certificate from the Competent Authority in the State Forest Department should be provided, confirming the involvement of forest land, if any, in the project area. In the event of any contrary claim by the Project Proponent regarding the status of forests, the site may be inspected by the State Forest Department along with the Regional Office of the Ministry to ascertain the status of forests, based on which, the Certificate in this regard as mentioned above be issued. In all such cases, it would be desirable for representative of the State Forest Department to assist the State Expert Appraisal Committees	There is no Forest Land involved in the proposed project area. The proposed project area is a patta land. Approved Mining Plan is enclosed in Annexure – 2.	92
1.13	Status of forestry clearance for the broken up area and virgin forestland involved in the Project including deposition of net present value (NPV) and compensatory afforestation (CA) should be indicated. A copy of the forestry clearance should also be furnished	Not Applicable. The proposed project area does not involve any Forest Land.	92

1.14	Implementation status of recognition of forest rights under the Scheduled Tribes and other Traditional Forest Dwellers (Recognition of Forest Rights) Act, 2006 should be indicated	Not Applicable. The project doesn't attract Recognition of Forest Rights Act, 2006.	-
1.15	The vegetation in the RF / PF areas in the study area, with necessary details, should be given	There only one R.F in buffer zone of the project i.e. Dalavaipattinam R.F. − 6.8km(N)□and there are no R.F in 1 km radius of the project site.	92
1.16	A study shall be got done to ascertain the impact of the Mining Project on wildlife of the study area and details furnished. Impact of the project on the wildlife in the surrounding and any other protected area and accordingly, detailed mitigative measures required, should be worked out with cost implications and submitted	The mining lease area and the 10 km buffer zone from the periphery of the core zone is devoid of declared ecologically sensitive features like national parks, biospheres, sanctuaries, etc.	-
1.17	Location of National Parks, Sanctuaries, Biosphere Reserves, Wildlife Corridors, Ramsar site Tiger/ Elephant Reserves/(existing as well as proposed), if any, within 10 km of the mine lease should be clearly indicated, supported by a location map duly authenticated by Chief Wildlife Warden. Necessary clearance, as may be applicable to such projects due to proximity of the ecologically sensitive areas as mentioned above, should be obtained from the Standing Committee of National Board of Wildlifeand copy furnished.	Not Applicable. There are No National Parks, Biosphere Reserves, Wildlife Corridors, and Tiger/Elephant Reserves within 10 km Radius from the periphery of the project area.	92
1.18	A detailed biological study of the study area [core zone and buffer zone (10 km radius of the periphery of the mine lease)] shall be carried out. Details of flora and fauna, endangered, endemic and RET Species duly	A detailed study of flora and fauna composition in the core and buffer zone of the project has been made. The details are furnished in section 3.7.7.	117

	authenticated, separately for core and buffer zone should be furnished based on such primary field survey, clearly indicating the Schedule of the fauna present. In case of any scheduled- I fauna found in the study area, the necessary plan along with budgetary provisions for their conservation should be prepared in consultation with State Forest and Wildlife Department and details furnished. Necessary allocation of		
	funds for implementing the same		
	should be made as part of the project cost		
1.19	Proximity to Areas declared as Critically Polluted or the Project areas likely to come under the Aravali Range, (attracting court restrictions for mining operations), should also be indicated and where so required, clearance certifications from the prescribed Authorities, such as the SPCB or State Mining Dept. Should be secured and furnished to the effect that the proposed mining activities could be considered	Not Applicable	-
1.20	Similarly, for coastal Projects, A CRZ map duly authenticated by one of the authorized agencies demarcating LTL. HTL, CRZ area, location of the mine lease w.r.t CRZ, coastal features such as mangroves, if any, should be furnished. (Note: The Mining Projects falling under CRZ would also need to obtain approval of the concerned Coastal Zone Management Authority)	Not Applicable	-
1.21	R&R Plan/compensation details for the Project Affected People (PAP) should be furnished. While preparing the R&R Plan, the relevant State/National Rehabilitation & Resettlement Policy should be kept in view. In respect of SCs /STs and other	The mining activities will be carried out within the mine lease area only. The entire mine lease area of 14.40.00 Ha is a patta land. There is no population within the ML area. Hence, the question of R& R does not arise.	

	weaker sections of the society in		
	the study area, a need based		
	sample survey, family-wise, should		
	be undertaken to assess their		
	requirements, and action		
	programmes prepared and		
	submitted accordingly, integrating		
	the sectoral programmes of line		
	departments of the State		
	Government. It may be clearly		
	brought out whether the village(s)		
	located in the mine lease area will		
	be shifted or not. The issues		
	relating to shifting of village(s)		
	including their R&R and socio-		
	economic aspects should be		
1.22	discussed in the Report One season (non-monsoon) [i.e.	Baseline data for meteorology,	
1.22	March-May (Summer Season);	ambient air quality, Water	
	October-December (post monsoon	quality, noise level, soil and	
	season) ; December-February	flora & fauna are collected	
	(winter season)]primary baseline	during Pre-Monsoon season	
	data on ambient air quality as per	(March 2025 to May 2025) and	
	CPCB Notification of 2009, water	detailed in Chapter-3.	
	quality, noise level, soil and flora		
	and fauna shall be collected and		
	the AAQ and other data so		
	compiled presented date-wise in		
	the EIA and EMP Report.		
	Sitespecific meteorological data		0.5
	should also be collected. The		95
	location of the monitoring stations should be such as to represent		
	whole of the study area and		
	justified keeping in view the pre-		
	dominant downwind direction and		
	location of sensitive receptors.		
	There should be at least one		
	monitoring station within 500 m of		
	the mine lease in the pre-dominant		
	downwind direction. The		
	mineralogical composition of PM10,		
	particularly for free silica, should		
	be given.		
1.23	Air quality modeling should be	Air Quality Modelling for prediction	
	carried out for prediction of impact	of incremental GLC's of pollutant	
	of the project on the air quality of	was carried out using AERMOD view	160
	the area. It should also take into account the impact of movement of	and Detailed in Section 4.2.4.3.	
	account the impact of movement of		

	vehicles for transportation of mineral. The details of the model used and input parameters used for modeling should be provided. The air quality contours may be shown on a location map clearly indicating the location of the site, location of sensitive receptors, if any, and the habitation. The wind roses showing pre-dominant wind direction may also be indicated on the map.		
1.24	The water requirement for the Project, its availability and source should be furnished. A detailed water balance should also be provided. Fresh water requirement for the Project should be indicated	The entire water requirement for the project is 9.0 KLD which will be sourced from outside agencies. Negligible sewage of 1.8 KLD will be generated, for which a septic tank with soak pit will be set up. The water balance diagram is shown in Chapter 2.	146
1.25	Necessary clearance from the Competent Authority for drawl of requisite quantity of water for the Project should be provided	Not Applicable. The required water will be outsourced from the nearby village.	-
1.26	Description of water conservation measures proposed to be adopted in the Project should be given. Details of rainwater harvesting proposed in the Project, if any, should be provided	Details of water conservation plan are given chapter 4.	146
1.27	Impact of the Project on the water quality, both surface and groundwater, should be assessed and necessary safeguard measures, if any required, should be provided	Impact Studies and Mitigation Measures of Water Environment including Surface Water and Ground Water are discussed in Section 4.2.3.	140
1.28	Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided. In case the working will intersect groundwater table, a detailed Hydro Geological Study should be undertaken and Report furnished. The Report inter-alia, shall include details of the aquifers present and impact of mining activities on these	The quarrying activity will not intersect ground water table as quarrying is proposed upto a depth of 82 m bgl and water table is found at a depth of 93 m BGL.	_

	aquifers. Necessary permission from State Ground Water Authority for working below ground water and for pumping of ground water should also be obtained and copy furnished.			
1.29	Details of any stream, seasonal or	Not applicable.		
	otherwise, passing through the lease area and modification / diversion proposed, if any, and the impact of the same on the hydrology should be brought out	There is no strea otherwise, passir lease area.	ng through the	-
1.30	Information on site elevation,	Site Elevation	316 m from	
	working depth, groundwater table etc. Should be provided both in	above MSL	MSL	
	AMSL and bgl. A schematic diagram may also be provided for the same	Ultimate Depth	82 m bgl	-
	may also be provided for the same	Ground water	90 - 93 m	
			BGL.	
1.31	A time bound Progressive Greenbelt Development Plan shall be prepared in a tabular form (indicating the linear and quantitative coverage, plant species and time frame) and submitted, keeping in mind, the same will have to be executed up front on commencement of the Project. Phase-wise plan of plantation and compensatory afforestation should be charted clearly indicating the area to be covered under plantation and the species to be planted. The details of plantation already done should be given. The plant species selected for green belt should have greater ecological value and should be of good utility value to the local population with emphasis on local and native species and the species which are tolerant to pollution	Greenbelt Develor Recommended proposed for Development ar Section 4.4.5.4. 1.61.00 hectares allotted for development (16)	Species Greenbelt de detailed in s of land are greenbelt	-
1.32	Impact on local transport infrastructure due to the Project should be indicated. Projected increase in truck traffic as a result of the Project in the present road network (including those outside the Project area) should be worked	The traffic dens carried out and given in section 2	the same is	-

	out, indicating whether it is capable of handling the incremental load. Arrangement for improving the infrastructure, if contemplated (including action to be taken by other agencies such as State Government) should be covered. Project Proponent shall conduct Impact of Transportation study as per Indian Road Congress Guidelines		
1.33	Details of the onsite shelter and facilities to be provided to the mine workers should be included in the EIA Report	Temporary Infrastructure & other facilities will be provided to the Mine Workers after the grant of quarry lease and the same has been discussed in Section 2.11.4 of Chapter 2	-
1.34	Conceptual post mining land use and Reclamation and Restoration of mined out areas (with plans and with adequate number of sections) should be given in the EIA report	The post mining land use/conceptual land use of the study area is given in Chapter 2.	82
1.35	Occupational Health impacts of the Project should be anticipated and the proposed preventive measures spelt out in detail. Details of preplacement medical examination and periodical medical examination schedules should be incorporated in the EMP. The project specific occupational health mitigation measures with required facilities proposed in the mining area may be detailed	Occupational health and safety study is given in Para 10.1.5 of Chapter-3.	164
1.36	Public health implications of the Project and related activities for the population in the impact zone should be systematically evaluated and the proposed remedial measures should be detailed along with budgetary allocations	No major impact on public health will be there since the villages are located more than 1km from the lease area.	-
1.37	Measures of socio economic significance and influence to the local community proposed to be provided by the Project Proponent should be indicated. As far as possible, quantitative dimensions may be given with time frames for implementation	This project provides employment to 66 people directly & indirectly. Local people will be hired for unskilled labour. Through CSR, nearby schools, villages will be benefitted. For CER, INR 8.0 Lakhs is allocated. Based on the demand of the people during public hearing, further funds will be allocated, if necessary.	-

1.38	Detailed environmental management plan (EMP) to mitigate the environmental impacts which, should inter-alia include the impacts of change of land use, loss of agricultural and grazing land, if any, occupational health impacts besides other impacts specific to the proposed Project	Environmental Management plan details are given in Chapter 10.	184
1.39	Public Hearing points raised and commitment of the Project Proponent on the same along with time bound Action Plan with budgetary provisions to implement the same should be provided and also incorporated in the final EIA/EMP Report of the Project	During public hearing process, the opinions and demands of the people will be noted. The replies and commitment made by the proponent along with time bound action plan wherever applicable will be provided in Final EIA/EMP report.	-
1.40	Details of litigation pending against the project, if any, with direction / order passed by any Court of Law against the Project should be given	There is no litigation pending against the project.	-
1.41	The cost of the Project (capital cost and recurring cost) as well as the cost towards implementation of EMP should be clearly spelt out	Project Cost is Rs. 337.75 Lakhs (including EMP & CER cost) CER Cost is Rs.8.0/- lakhs EMP Cost is Rs. 50.35 Lakhs Capital Cost is Rs. 15.43 Lakhs Recurring Cost is Rs. 34.92 Lakhs for five years. The break up of the EMP cost is given in Table 10.2 of Chapter 10.	190
1.42	A Disaster management Plan shall be prepared and included in the EIA/EMP Report	The disaster and its management plan is given in Chapter-7.	177
1.43	Benefits of the Project if the Project is implemented should be spelt out. The benefits of the Project shall clearly indicate environmental, social, economic, employment potential, etc	This project will contribute financially through payment of taxes like royalty, GST, etc. The project will also contribute via CSR. The demands of people during public hearing will also be considered by the project proponent. This project provides employment to 66 people directly. Local people will be hired for unskilled labour. Through CSR, nearby schools, hospitals will be benefitted. For CSR, INR 8.0 Lakhs has been allocated.	-

- 1.44 Besides the above, the below mentioned general points are also to be followed:
 - a) All documents to be properly referenced with index and continuous page numbering.
 - b) Where data are presented in the Report especially in Tables, the period in which the data were collected and the sources should be indicated.
 - c) Project Proponent shall enclose all the analysis/testing reports of water, air, soil, noise etc. using the MoEF&CC/NABL accredited laboratories. All the original analysis/testing reports should be available during appraisal of the Project.
 - d) Where the documents provided are in a language other than English, an English translation should be provided.
 - e) The Questionnaire for environmental appraisal of mining projects as devised earlier by the Ministry shall also be filled and submitted.
 - f) While preparing the EIA report, the instructions for the Proponents and instructions for the Consultants issued by MoEF vide O.M. No. J-11013/41/2006-IA.II(I) dated 4th August, 2009, which are available on the website of this Ministry, should be followed.
 - g) Changes, if any made in the basic scope and project parameters (as submitted in Form-I and the PFR for securing the TOR) should be

Yes, Complied.

brought to the attention of MoEF&CC with reasons for such changes and permission should be sought, as the TOR may also have to be altered. Post Public Hearing changes in structure and content of the draft EIA/EMP (other than modifications arising out of the will process) entail conducting the PH again with the revised documentation. h) As per the circular no. J-11011/618/2010-IA.II(I) dated 30.5.2012, certified report of the status of compliance of the conditions stipulated in the environment clearance for the existing operations of the project, should be obtained from the Regional Office of Ministry of Environment, Forest and Climate Change, as may be applicable.

- The EIA report should also include surface plan of the area indicating contours of main topographic features, drainage and mining area,
- eological maps and sections and
- sections of the mine pit and external dumps, if any, clearly showing the land features of the adjoining area

CHAPTER 1 INTRODUCTION

1.1 PURPOSE OF THE REPORT

Environmental Impact Assessment (EIA) is the management tool to ensure the sustainable development and it is a process, used to identify the environmental, social and economic impacts of a project prior to decision making. It is a decision-making tool, which guides the decision makers in taking appropriate decisions for any project.

EIA systematically examines both beneficial and adverse consequences of the project and ensures that these impacts are taken into account during the project designing. It also reduces conflicts by promoting community participation, information, decision makers, and helps in developing the base for environmentally sound project.

Rough Stone are the major requirements for construction industry. This EIA report is prepared by considering Cumulative load of all proposed & existing quarries located within 500 m radius of the project area.

M/s.Shri Rajrudhra Minerals Private Limited proposes to operate Rough Stone and Gravel Quarry over an extent of 14.40.00 Ha Patta Land in S.F. Nos. 394/2,396/2,402(P),403(P),407/1A1,407/1A2,407/1B,407/2A,407/2B,408/1(P), 408/2(P),408/4,409(P) and 698(P) of Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State and ToR obtained vide ToR Identification No. TO25B0108TN5329247N (F.No. 12576), dated 25.09.2025.

A small quarry pit exists in applied area which was operated by some other lessee before 2015. CCR is not applicable. The existing pit dimension mentioned in the approved mining plan is given below.

Pit No	length (Max) in(m)	Width (Avg) in (m)	Depth (Max) in (m)
I	101	55	17

This proposed project is categorized under category "B1" Activity 1(a) (mining lease area in cluster situation). This cluster includes the two existing quarry and two proposed Quarries including this proposed Quarry. The existing and proposed quarries located within 500m radius are detailed in below Table.

Table 1.1 - Details of Quarries within 500m Radius

SI.	Name of the	S. F. No.	Extent	Lease Status		
No	Lessee	3. F. NO.	(Ha)	Lease Status		
	a. Existing Quarries					
1	M/s.Shri Rajrudhra Minerals, Private Limited, No.99/2B1B, 1st Floor, Vellore Main Road, Arcot Taluk, Ranipet District	392/2(P), 393/2(P), 394/1, 395, 396/1, 397, 398/1A1(P)	4.42.0 Ha	06.03.2024 – 05.03.2029		
2.	K.Vinjai Mani Oosai, S/o Kandasamy 23, Keezhvadam Street, Palani Taluk. Dindigul Dist.	388(P)	0.40.5 Ha	30.08.2023 – 29.08.2028		
		b. Proposed Quar	ries			
1	M/s.Shri Rajrudhra Minerals Private Limited, No.99/2B1B, 1st Floor, Vellore Main Road, Arcot Taluk, Ranipet District	381/1(P)	5.57.0 Ha	Proposed (Rough stone)		
2	M/s.Shri Rajrudhra Minerals Private Limited, No.99/2B1B, 1st Floor, Vellore Main Road, Arcot Taluk, Ranipet District	394/2, 396/2, 402(P), 403(P), 407/1A1,407/1A2, 407/1B,407/2A, 407/2B,408/1(P), 408/2(P),408/4, 409(P),698(P)	14.40.0 Ha	Applied (Rough stone)		

Cluster area calculated as per MoEF & CC Notification S.O. 2269(E) Dated 1st July 2016. Satellite image of Quarries in Cluster is shown in Fig 1.1.

As per MoEF&CC OM: F.No.L-11011/175/2018-IA-II(M), dated 12.12.2018, the EIA/EMP report has to be prepared for the cluster area based on ToR recommended by SEIAA. Therefore, the applicant applied for ToR through Parivesh website vide online proposal no. SIA/TN/MIN/547600/2025, Dated 11/08/2025. The ToR proposal was placed in 611h SEAC meeting, dt 29.08.2025 and 887th SEIAA meeting, dated 16.09.2025. Then ToR has been issued by the SEIAA vide ToR Identification No. TO25B0108TN5329247N, Dated: 25/09/2025 to prepare the draft EIA report as per the recommended ToR for conducting Public hearing and obtaining Environmental Clearance from the SEIAA.

Existing Quarries

(0.40 SH2)

Existing Quarries

(0.40 SH2)

Existing Quarries

M/s.Shri Rajrudra Minerals Private Limited

(4.42.0 Ha)

Proposed Quarry of

M/s.Shri Rajrudra Minerals Private Limited
(5.57.0 Ha)

Present Proposed Quarry

Figure.1.1 Satellite Image showing cluster quarries

IDENTIFICATION OF PROJECT AND PROJECT PROPONENT

1.1.1 IDENTIFICATION OF PROJECT Table -1.2 Project Identification

Name of the Project	Rough Stone and Gravel Quarry of M/s.Shri Rajrudhra Minerals Private Limited
S.F No.	394/2,396/2,402(P),403(P),407/1A1,407/1A2,407/1B,407/2A, 407/2B,408/1(P),408/2(P),408/4,409(P) AND 698(P)
Location of the Project	Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State
Extent	14.40.00 Ha
Type of Land	Patta Land

1.1.2 IDENTIFICATION OF PROJECT PROPONENT

Table -1.3- Details of Project Proponent

Name of the Project Proponent	M/s.Shri Rajrudhra Minerals Private Limited
Communication address	No.99/2B1B,1st floor,
	Vellore Main Road,
	Arcot Taluk, Ranipet District, Pincode-632 503
e-mail Address	-
Mobile No.	7867008858

1.2 BRIEF DESCRIPTION OF THE PROJECT

1.2.1 NATURE AND SIZE OF THE PROJECT

The quarrying operation is proposed to be carried out by Opencast Mechanized Mining Method by jack hammer drilling, slurry blasting by forming 5.0 m bench height and 5.0 m bench width. Excavator and tippers are proposed for Loading and transportation.

Table - 1.4 Brief Descriptions of the Project

Name of the Quarry	Rough Stone and	Gravel Quarry of
	M/s.Shri Rajrudhra Mineral	s Private Limited
Toposheet No	58 F/06	
Latitude	10°36'38.18"N to 10°36'54	1.46"N
Longitude	77°27'37.45"E to 77°27'59).56"E
The altitude of the area	316 m (AMSL)	
Proposed Depth of Mining	82m BGL	
Geological Resources	1,11,59,390 m ³ Rough Sto	ne & 2,38,210 m ³
	Gravel	
Mineable Reserves	57,26,860 m ³ of Rough Sto	ne &
	2,15,410 m ³ Gravel	
Proposed Production (5	57,26,860 m3 of Rough St	one &
Years)	2,15,410 m3 Gravel	
Ultimate pit Dimension	656 m (L) X 194 m (W) X 8	82 m (D), Depth - 82 m
	BGL	
Water Level in the area	90 - 93 m BGL	
Method of Mining	Opencast Mechanized Mi	ning Method involving
	drilling and blasting	
Topography	The area applied for qu	arry lease is exhibits
	almost plain topography	covered by Gravel
	formation. The massive C	harnockite formation is
	noticed below 2 m (Avg	g) Gravel and sloping
	towards Southeastern si	de of the area, the
	altitude of the area is abo	ove 316 m (maximum)
	from MSL.	
Machinery Proposed	Jack Hammer	30 Nos
	Compressor	8 Nos
	Excavator with bucket	5 Nos
	and rock breaker	
	Tipper (5/10 T)	10 Nos

Environmental Setting	Water Bodies -Odai -	80m (E), Tank	-700m(NE),
within 500m Radius	949m (NW), 1.5Km (SE), 1.6Km (SE),Amaravathi		
	River -2.3 km (NW),	, ,	
	, , ,		7C1 3.1 KIII
	(SE)		
	Nearest Habitation -	Nil within 50	00m Radius
	Nearest RF -Nil within !	500m Radius	
Details of Habitation	S. Name of the No Village	Approximate distance & Direction from lease applied area	Approximate population
	1. Kottathurai	1.2Km-NE	400
	2. Rajampatti	1.4Km – NW	500
	3. Melkaraipatti	1.8km - SE	800
	4. Panampatty	1.9km - SW	300
Proposed Manpower	66 Nos		
Development			
Water Requirement	9.0 KLD		
Greenbelt Development	The safety zone of 1.61.00 Ha will be developed		e developed
	with about 1610 Nos. o	of plantation.	
Fuel Requirement	4617.39 KL of HSD (Er	ntire Project Life)
Project Cost	Rs. 337.75 Lakhs (Inc	cluding operatio	nal + Fixed
	Asset + EMP cost + CE	R cost).	
EMP Cost	Total EMP Cost for 5 y	ears is 50.35 la	akhs i.e.,
	Rs.15.43 Lakhs of Cap	oital + Recurrin	g cost Rs.
	34.92 lakhs for five years		
CER Cost	Rs. 8.0 Lakhs		
Applicability of CRZ	Not Applicable		
Clearance			
Nearest Crusher	54 m (S)		

1.2.2 NATURE OF THE PROJECT

Sector	1(a) Non-Coal Mining		
Type	Already operated by some other lessee before 2015.		
Category	B1 (Cluster Situation)		
Mineral	Minor mineral of Rough Stone		

1.2.3 LOCATION OF PROJECT

The proposed Quarry lease area is situated at S.F.Nos. 394/2, 396/2, 402(P), 403(P), 407/1A1, 407/1A2, 407/1B, 407/2A, 407/2B, 408/1(P), 408/2(P), 408/4, 409(P) And 698(P) of Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State. The area lies in the north **Latitude:** 10°36'38.18"N to 10°36'54.46"N and **Longitude**: 77°27'37.45"E to 77°27'59.56"E. Location of the proposed project is shown in Figure 2.1 and the satellite imagery of the project site is shown in Fig 2.2. The details of Environmental Sensitivity within 500 m radius are shown below:

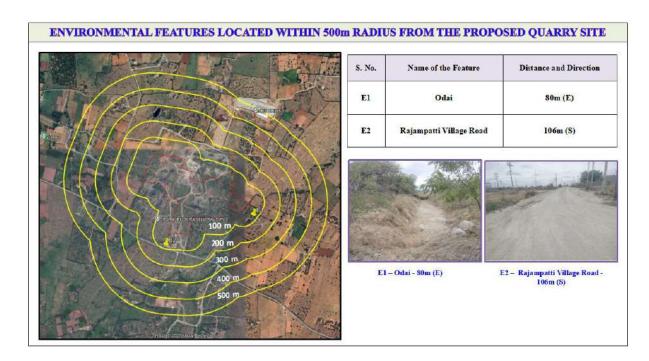


Figure 1.2 - Environmental Features Map

1.3 IMPORTANCE OF THE PROJECT TO THE REGION

Rough stone will continue to be a staple in construction, decoration and industry for years to come. As recycling picks up, mining and quarries may slow down, but we will always need rough stone in general construction and industry.

1.4 REGULATORY COMPLIANCES

Understanding of the applicable environmental legislative framework is crucial for understanding the scope of the EIA study. With respect to prevention and control of environmental pollution, the following Acts and Rules of MoEF&CC (Ministry of Environment Forests and Climate Change), GoI (Government of India) govern the proposed project. The applicable environmental legislation for the proposed mining project is detailed below,

- Environment protection Act, 1986
- EIA Notification, 2006 & Subsequent amendments
- Water Pollution (Prevention & Control) Act, 1974
- Air Pollution (Prevention & Control) Act, 1981
- Noise Pollution (Regulation 7 Control) Rules, 2000
- Mines Act, 1952
- Tamil Nadu Minor Mineral Concession Rules, 1959
- Mines and Minerals (development and regulation) Act, 1957
- Minor Minerals Conservation and Development Amendment Rules 2018
- State Minor Mineral Concession Rules (GMMCR), 2017
- Explosive Act ,1884
- Explosive Rules, 2008
- Hazardous and other Wastes (management and Transboundry Movement)
 Rules, 2016
- Batteries (Management and Handling) Rules 2010
- Solid Waste Management Rule 2016

1.4.1PRESENT LEGAL STATUS

Table 1.5 - Present Legal Status

Description	Issuing Authority	Status	Letter number	Date	Reference
Communication	Assistant Director, Department of Geology and Mining, Dindigul	Received	Rc.No. 587/2025(Kanimam)	28.07.2025	Annexure - 2
Mine Plan Approval	Assistant Director, Department of Geology and Mining, Dindigul	Approved	Rc.No. 587/2025/Mines	07.08.2025	Annexure-3
500m radius Cluster	Assistant Director, Department of Geology and Mining, Dindigul	Obtained	Rc.No. 587/2025/Mines	07.08.2025	Annexure-4
VAO NOC for features within 300m radius	VAO, Melkaraipatti	obtained	-	01.08.2025	Annexure-5

1.4.2 SCREENING

As per the Environmental Impact Assessment (EIA) Notification dated 14th September 2006 and its subsequent amendments the proposed quarry mining project falls under 'Category B1(Cluster Situation)', which requires Environmental Clearance from the State Environmental Impact Assessment Authority (SEIAA). The project proponent has appointed M/s. Global Mining Solutions, Salem, who are accredited by the National Accreditation Board for Education and Training (NABET), Quality Council of India (QCI), New Delhi, under the registration number NABET/EIA/23-26/SA 0241. Their role is to carry out an Environmental Impact Assessment (EIA) and Environmental Management Plan (EMP) study in compliance with the Ministry of Environment, Forest and Climate Change (MoEF & CC) requirements.

1.4.3 SCOPING

The proposal was placed in the 611th meeting of SEAC on 29.08.2025. Based on the presentation and documents furnished by the project proponent, SEAC decided to recommend the proposal for the grant of Terms of Reference (ToR) to SEIAA and SEIAA recommended ToR in its 887th meeting dated 16.09.2025.

1.4.4 SCOPE OF THE STUDY

In line with the prescribed Terms of Reference (TOR), the area comprising 10 km radius around the proposed mine lease boundary is considered as the study area. The EIA/EMP report has been prepared following the generic structure specified in the EIA Notification 2006. The detailed studies have been conducted as per prescribed Standard TOR issued by SEIAA, TamilNadu vide ToR Identification No. TO25B0108TN5329247N (F.No.12576), dated 25.09.2025. The point wise compliance for the ToR has been incorporated in this EIA/EMP report.

The main scope of the EIA study is to quantify the cumulative impact in the study area due to cluster quarries and formulate the effective mitigation measures for this applied project area. A detailed account of the emission sources, emissions control equipment, background Air quality levels, Meteorological measurements, Dispersion model and all other aspects of pollution like effluent discharge, Dust generation

etc., have been discussed in this report. The baseline monitoring study has been carried out during the Period of March 2025 – May 2025 for various environmental components so as to assess the anticipated impacts due the cluster quarry projects on the environment and suggest suitable mitigation measures for likely adverse impacts due to this proposed project.

The scope of study broadly covered as below,

- Literature review and collection of secondary data relevant to the study area.
- Establish the baseline environmental aspects in and around the proposed project covering 10 km radius.
- Identify various existing pollution loads due to various mining activities.
- Predict incremental levels of pollutants in the study area due to the proposed operations.
- Establishing and analyzing demographic profile including sex ratio, literacy rate, SC/ST, workers classification, land use categorization, etc in the project influenced area
- Evaluate the predicted impacts on various environmental attributes in the study area by using scientifically developed and widely accepted environmental impact assessment methodologies.
- Prepare an Environment Management Plan (EMP) outlining the measures for improving the environmental quality and identify critical environmental attributes that are required to be monitored in the post-project scenario.
- To assess the impacts on human settlement in the project influence area Socio-Economic Assessment
- Cumulative impact assessment for the quarries in cluster.

1.5 NEED AND JUSTIFICATION OF THE PROJECT

 Proposed mining project will fulfill the local market requirement for real estate and infrastructure industry. This project will also provide employment to local people helping them earn livelihood.

- Employment generated consequent to the mining activity in the project will be benefit local and rural population and will have multiplier effects on local economy.
- The Project will give tremendous boosts to the local and regional economy benefiting the population.
- The social benefits arising out of this proposal can be expressed in terms of increase in the standards of living of local population, educational opportunities, training and development of skills etc.

1.6 STRUCTURE OF THE REPORT

As per the new guidelines of the MoEF & CC the report has been divided into the following chapters and presented as follows:

1. Introduction

This chapter describes the profile of the project proponent, name and contact address with email, project consultants, the purpose of the project, brief description of the project, applicable environmental regulations, objectives and methodology for EIA studies etc.

2. Project Description

This chapter gives a brief description of the project such as the type of project, need for the project, its location, approachability, layout, etc of the proposed project, the project implementation schedule, estimated cost of development etc.

3. Description of the Environment

This chapter presents details of the baseline environmental status for microclimate, air quality, noise, water quality (surface and ground), soil quality, flora, fauna and socioeconomic status etc.

4. Anticipated Environmental Impacts & Mitigation Measures

This chapter discusses the possible sources of pollution and environmental impacts due to the project during operation phases and suggests the mitigation measures.

5. Analysis of Alternatives (Site And Technology)

This chapter discusses the analysis of the various alternatives for the technology as well as the site and gives the selection of the most feasible alternative.

6. Environmental Monitoring Program

This chapter discusses the details about the environmental monitoring program during operation phases. The technical aspects of monitoring the effectiveness of mitigation measures are covered in this chapter.

7. Additional Studies

This chapter covers information about the additional studies conducted for this project such as the Risk Analysis, Emergency Response and Disaster Management Plan.

8. Project Benefits

This chapter presents the benefits from this project

9. Cost Benefit Analysis

Environmental Cost Benefit Analysis has not been recommended at Scoping Stage – thus no analysis carried out separately in this EIA/EMP Report.

10. Environmental Management Plan

This chapter deals with the EM for the proposed sand mining projects and indicates the measures proposed to minimize the likely impacts on the environment during and operation phases and budgetary allocation for the same.

11. Summary and Conclusion

This chapter deals with the overall justification for implementation of the project and explanation of how, adverse effects have been mitigated.

12. Disclosure of Consultant

This chapter deals with the details of consultants engaged and the NABET accreditation details of environmental consultants.

CHAPTER 2 PROJECT DESCRIPTION

2.1 TYPE OF THE PROJECT

The proposed activity is the extraction of Rough Stone and Gravel Quarry by open cast mechanized mining method.

This project proposed to produce 57,26,860 m³ of Rough Stone and 2,15,410 m³ Gravel for the period of 5 years with ultimate depth up to 82m BGL.

2.2 NEED FOR THE PROJECT

Rough stone is one of the important materials for the building construction. The rough stone is used as both as coarse aggregate and fine aggregate after the proper sizing of stone. The coarse and fine aggregate are essential for preparing concrete which is used in foundation, beam, column, roof slab work of the buildings. The infrastructure is the sign of development of nation. So, it is very need to excavate the rough stone for economic and infrastructure development of our Nation.

2.3 LOCATION OF THE PROJECT

This is a Rough Stone and Gravel Quarry located in Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State. The area lies in the north latitude of **Latitude:** 10°36'38.18"N to 10°36'54.46"N and **Longitude**: 77°27'37.45"E to 77°27'59.56"E and toposheet number 58 F/06. Location of the proposed project is shown in Figure 2.1 the satellite imagery of the project site is shown in Figure 2.2.

This proposed project area is classified as Patta Land & does not fall within 10 km radius of any Eco – sensitive zone, Wild life Sanctuary, National Park, Tiger Reserve, Elephant Corridor and Biosphere Reserves. The M.L area details are presented in below Table.

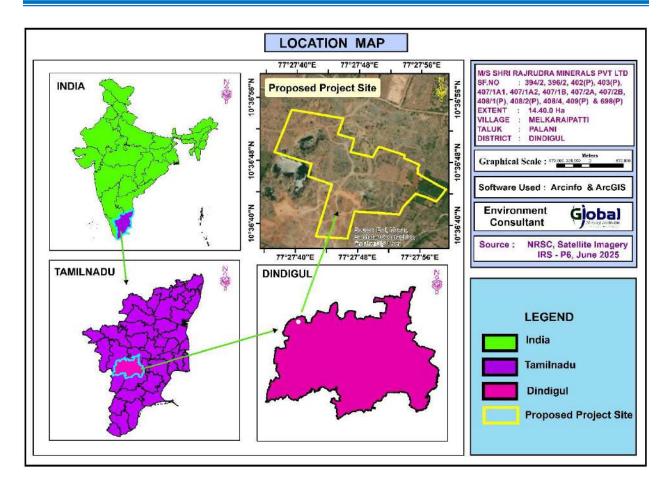


Figure 2.1 Location Map

Table 2.1 Boundary Coordinates of the Project Site

Cornora	Co- o	rdinates	Distance between the		
Corners	Latitude	Longitude		corn	iers
1	10° 36′ 49.05″N	77° 27′ 37.45″E	1-2	=	179.0m
2	10° 36′ 54.46″N	77° 27′ 39.62″E	2-3	=	204.0m
3	10° 36′ 53.44″N	77° 27′ 46.25″E	3-4	=	65.4m
4	10° 36′ 51.43″N	77° 27′ 45.57″E	4-5	=	66.4m
5	10° 36′ 50.87″N	77° 27′ 47.68″E	5-6	=	54.2m
6	10° 36′ 49.16″N	77° 27′ 47.24″E	6-7	=	69.4m
7	10° 36′ 48.69″N	77° 27′ 49.47″E	7-8	=	18.8m
8	10° 36′ 48.54″N	77° 27′ 50.07″E	8-9	=	48.2m
9	10° 36′ 49.90″N	77° 27′ 50.85″E	9-10	=	106.8m
10	10° 36′ 48.85″N	77° 27′ 54.20″E	10-11	=	11.2m
11	10° 36′ 48.49″N	77° 27′ 54.11″E	11-12	=	65.2m
12	10° 36′ 47.66″N	77° 27′ 56.08″E	12-13	=	15.6m
13	10° 36′ 47.19″N	77° 27′ 55.89″E	13-14	=	19.8m

14	10° 36′ 46.54″N	77° 27' 55.88"E	14-15 =	89.6m
15	10° 36′ 45.13″N	77° 27′ 58.45″E	15-1 =	37.4m
16	10° 36′ 44.59″N	77° 27′ 59.56″E	16-17 =	15.0m
17	10° 36′ 44.19″N	77° 27' 59.27"E	17-18 =	46.8m
18	10° 36′ 43.01″N	77° 27' 58.30"E	18-19 =	42.6m
19	10° 36′ 43.56″N	77° 27' 57.02"E	19-20 =	43.8m
20	10° 36′ 43.98″N	77° 27' 55.65"E	20-21 =	69.8m
21	10° 36′ 42.32″N	77° 27' 54.08"E	21-22 =	33.8m
22	10° 36′ 41.35″N	77° 27' 53.57"E	22-23 =	175.4m
23	10° 36′ 41.65″N	77° 27' 47.81"E	23-24 =	110.0m
24	10° 36′ 38.18″N	77° 27' 46.96"E	24-25 =	123.8m
25	10° 36′ 38.42″N	77° 27' 42.89"E	25-26 =	211.8m
26	10° 36′ 45.03″N	77° 27' 44.87"E	26-27 =	98.0m
27	10° 36′ 46.04″N	77° 27' 41.81"E	27-28 =	50.0m
28	10° 36′ 47.62″N	77° 27′ 42.20″E	28-1 =	151.0m

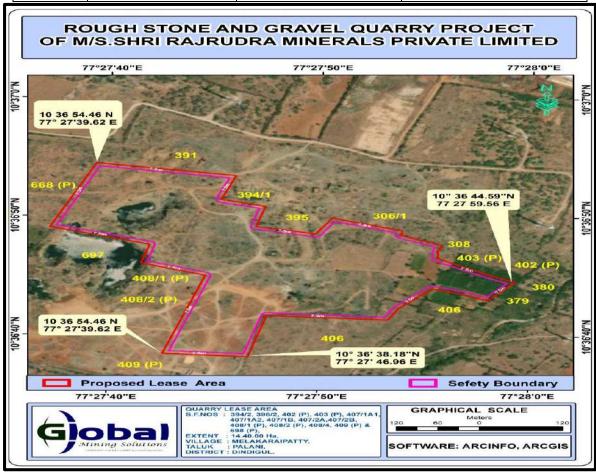


Figure 2.2 Google Image of the project site with Boundary Coordinates

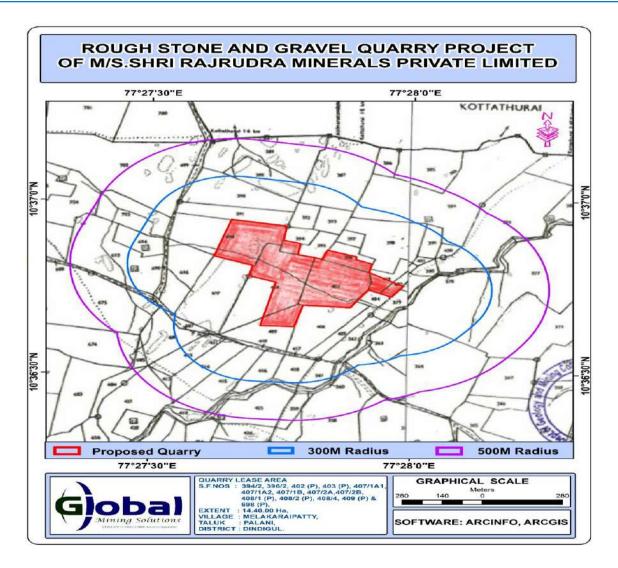


Figure 2.2a - Village Map showing 300 m and 500 m radius

le 2.2 Mine Lease Area and its Ownership

10 =1= 10 = 00.00 7 00 0 0 0				
Location	S.F. No	Area in Ha	Ownership	
Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State.	394/2, 396/2, 402(P), 403(P), 407/1A1, 407/1A2, 407/1B, 407/2A, 407/2B, 408/1(P), 408/2(P), 408/4, 409(P) And 698(P)	14.40.00	It is a Patta Land registered in the name of Applicant (M/s. Shri Rajrudhra Minerals Private Limited) vide patta no. 2059, 2700, 2663, 2530 & 2250.	
Total		14.40.00		

Table 2.3 Site Connectivity

Nearest Roadway	 There is an existing road from the area leads to Kottathurai to Melkaraipatti Village road (137 m) on south side of the area. The Nearest Railway line is Dindigul – Udumalaipet line which is about 10.0Km on the southwest side of the area. The National Highway (NH-83) Dindigul – Coimbatore is about 9.4km on Southwestern side of the area. The State Highway (SH-192) Idayakottai – Thalayuthu is about 1.9Km on Southeastern side of the area.
Nearest Village	Rajampatti – 1.25 km (NW)
Nearest Railway	Pushpattur -10.4 km – SW
Nearest Airport	Madurai Airport (102 km - SE)

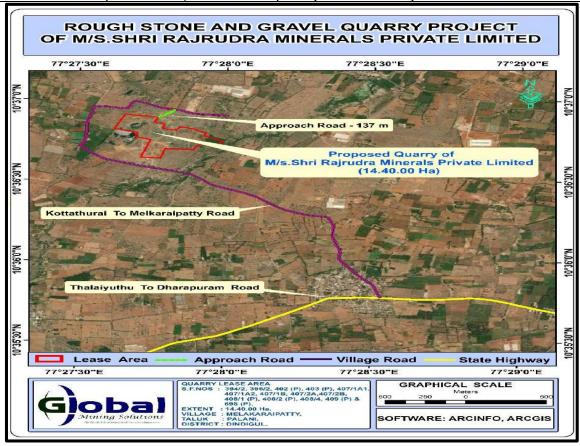


Figure 2.3 Site Connectivity Map

Table 2.4 Salient features of the Project

S. No.	Particulars	Details
1.	Name of the Quarry	Rough Stone and Gravel Quarry of
		M/s.Shri Rajrudhra Minerals Private Limited
2.	Proposed project	Rough Stone and Gravel Quarry
3.	Extent	14.40.00 Ha and the cluster area within 500 m
		radius including the proposed mine is 24.79.50 Ha >
		5 Ha
4.	Location	S.F.Nos. 394/2, 396/2, 402(P), 403(P), 407/1A1, 407,
		407/1B, 407/2A, 407/2B, 408/1(P), 408/2(P), 408/4,
		409(P) and 698(P) Melkaraipatti Village, Palani Taluk,
		Dindigul District, Tamil Nadu State.
5.	Co-ordinates of the	Latitude: 10°36'38.18"N to 10°36'54.46"N
	project site	Longitude: 77°27'37.45"E to 77°27'59.56"E
6.	Topography	Plain Terrain
7.	Site Elevation above	316 m from MSL
	MSL	
8.	Topo Sheet No.	58-F/06
9.	Minerals of Mine	Rough Stone and Gravel
10.	Proposed production	57,26,860 m³ of Rough Stone and 2,15,410 m³
	in m3	Gravel for the period of 5 years with ultimate depth
		up to 82m BGL.
11.	Ultimate Depth of mining	82 m (BGL)
12.	Method of Mining	Opencast Mining with a bench height of 5 m and
		bench width of 5 m is proposed
13.	Drilling/Blasting	Drilling and controlled Blasting is proposed
14.	No. of Working days	300 Days
15.	Water requirement &	9.0 KLD and will be sourced from local vendors

	Source	
16.	Manpower	66 Nos.
17.	Project Cost	Rs. 337.75 lakhs including EMP and CER cost.
18.	Mining Plan Approval	Assistant Director, Department of Geology and
		Mining, Dindigul vide Roc.No. 587/2025/ Mines,
		dated 07.08.2025.
19.	Safety Zone	1.61.00 Ha will be maintained as safety zone and
		tree saplings (1610 Nos) will be planted in this area
20.	Ground water level	93 m in summer and 90 m in rainy seasons
21.	Distance of Stone	54 m (S)
	Crusher	
22.	Previous History &	A small quarry pit exists in applied area which was
	CCR	operated by some other lessee before 2015. CCR is
		not applicable.

Table 2.5 Environmental Settings of the project site

S.	Particulars	Details
No.		
1.	Nearest Highway	(NH-83) Dindigul - Coimbatore - 9.4 km (SW) □(SH-192) Idayakottai - Thalayuthu Road - 1.9 Km (SE)
2.	Interstate	Not Applicable
	Boundary	
3.	Nearest Railway Station	Dindigul – Udumalaipet line - 10.0Km (SW)
4.	Nearest Airport	Madurai Airport (102 km - SE)
5.	Nearest Village	Rajampatti – 1.25 km (NW)
6.	Water bodies	Odai – 80m (E), Tank – 700m(NE), 949m (NW),
		1.5Km (SE), 1.6Km (SE), Amaravathi River - 2.3
		km (NW), Shanmukha River – 3.4 km (SE)

7.	Reserved Forest	Dalavaipattinam R.F. – 6.8km(N)
8.	Eco Sensitive Zone	Nil within 10km Radius
	and Wildlife	Kodaikanal Wildlife Sanctuary - 24.00 km (S)
	Sanctuary	
	(Notified)	
9.	Archaeological	Nil within 10 km radius
	important places	
10.	Defense	Nil within 10 km radius
	Installations	
11.	Nearest Port	Nil within 10 km radius
12.	Seismic Zone	Zone – II (Least Active)

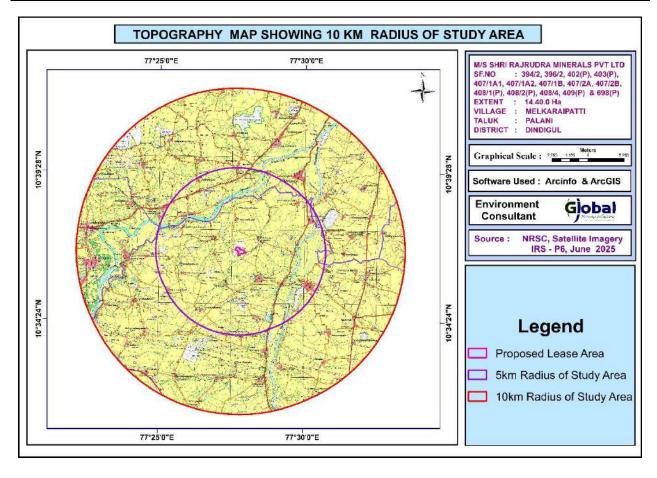


Figure 2.4 10km Radius TOPO Map

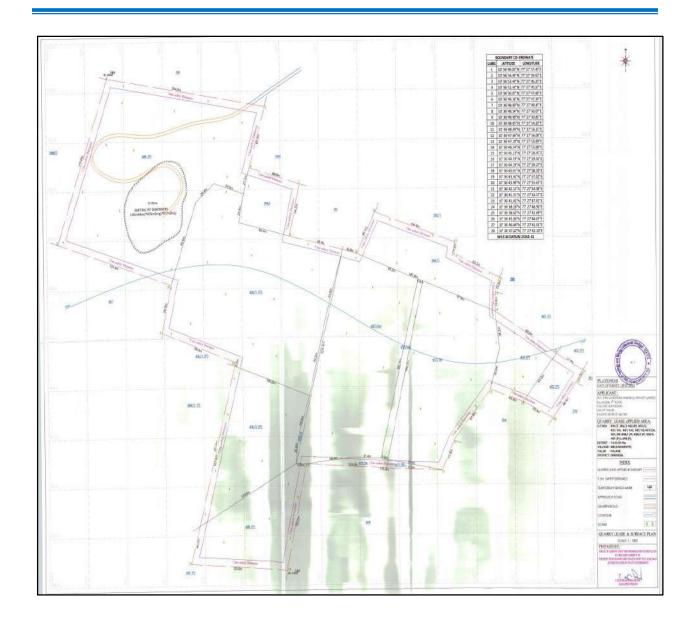


Figure 2.5 Lease Plan

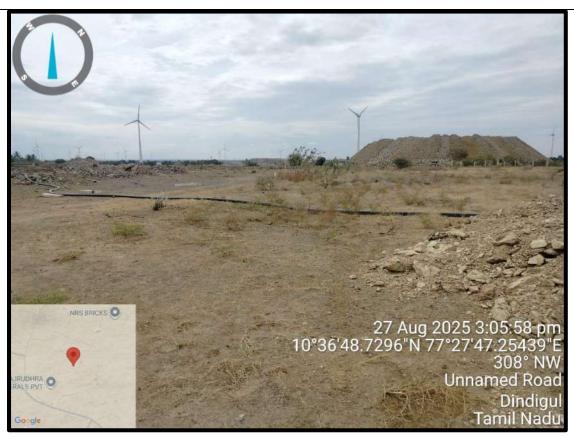




Figure 2.7 Site Photographs

LAND USE PATTERN OF THE PROJECT AREA

The entire project site is patta land registered in the name of Applicant M/s. Shri Rajrudhra Minerals Private Limited) vide patta no. 2059, 2700, 2663, 2530 and 2250.

The land use pattern of the mine lease area as of today and conceptual stage given in Table No. 2.6.

Table 2.6 Land use pattern of the Project area

Description	Present Area in Ha.	Area at the end of life of Quarry in Ha.		
Quarrying Pit	00.55.50	12.73.00		
Infrastructure	Nil	0.02.00		
Roads	Nil	0.04.00		
Safety Zone / Green Belt	Nil	1.61.00		
Unutilized	13.84.50	Nil		
Total	14.40.00	14.40.00		

2.4 SIZE AND MAGNITUDE OF THE OPERATION

The proposed activity is the extraction of Rough Stone and Gravel by open cast mechanized mining method over an extent of 14.40.00 Ha and to produce 57,26,860 m3 of Rough Stone and 2,15,410 m3 Gravel for the period of 5 years with ultimate depth up to 82m BGL. The details of geological and mineable reserves in the lease area have been provided below in the subsequent sub section.

2.5 TOPOGRAPHY AND DRAINAGE

The area applied for quarry lease is exhibits almost plain covered by gravel formation. The massive Charnockite formation is noticed below 2m Gravel formation and sloping towards southeastern side of the area, the altitude of the area is above 316m (maximum) from MSL.


2.6 GEOLOGY

2.6.1 REGIONAL GEOLOGY

The district is essentially a high-grade gneissic terrain characterized by highly deformed rocks, which can be classified under three groups as 1) Khondalite Group, 2) Charnockite Group and 3) Migmatite Group. The terrain also exposes basic/ultrabasic and younger acid intrusives.

Age	Group	Lithology
	Recent to	Kankar
QUATERNERY	Pleistocene	Laterite
PROTEROZOIC		Quartz veins
PROTEROZOIC	Acid intrusives	Pegmatite
		Granite
ARCHAEAN-		Pink migmatite
PROTEROZOIC	Migmatite	
	Group	Granitic gneiss
		Hornblende-biotite gneiss
		Anorthosite
	Basic/Ultabasic	
	Intrusives	Amphibolite / Norite / Gabbro
		Ultramafics
		Magnetite quartzite
	Charnockite	
	Group	Pyroxene granulite
		Charnockite
		Garnet quartz - feldspar gneiss
	Khondalite	
	Group	Garnet - sillimanite gneiss ± cordierite
		Calc-gneiss / Limestone
		Quartzite

(Source: GSI, DRM & Misc. Pub. 30, 2006)

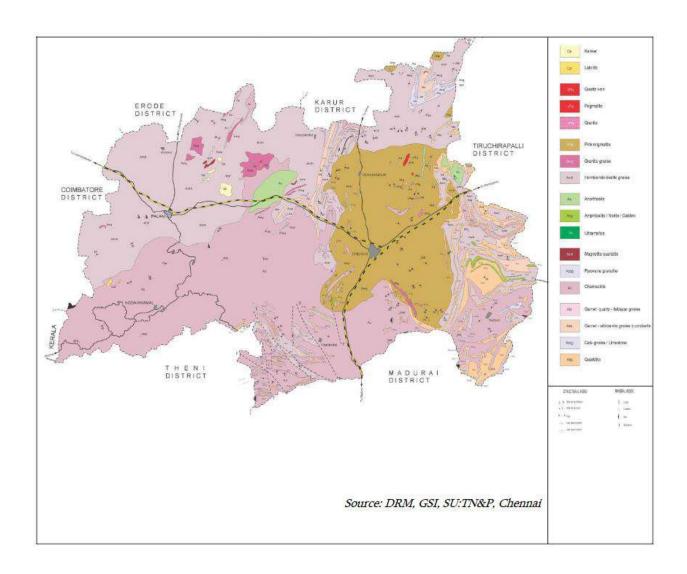

Source: District Survey Report, Dindigul

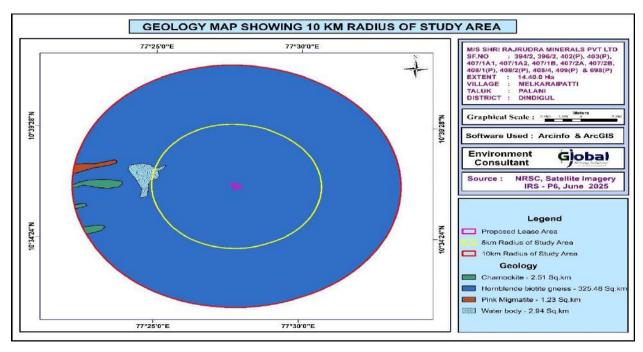


Figure 2.8 Geology Map – 10km Radius from the Project Site

2.6.2 LOCAL GEOLOGY:

The area is underlain by the wide range of metamorphic rocks of peninsular gneissic complex. These rocks are extensively weathered and overlain by the recent valley fills and alluvium at places. The geological formations found in the district are Archaean rocks like Gneisses, Granites, Charnockites basic granulites and calc-gneisses. The younger formations are Quartz veins and pegmatite.

The rock type noticed in the area for lease is Charnockite which contains mostly Quartz and Feldspar with some ferromagnesian minerals. The Charnockite is part of peninsular Gneisses, a high grade metamorphic rock.

The strike of the Charnockite formation is $N40^{\circ}E$ – $S40^{\circ}W$ with vertical dipping.

The general geological succession of the area is given as under.

ļ	<u> AGE</u>		ROCK TYPE
	Recent	-	Gravelly soil
			Unconformity
	Archaean	-	Dolerite dyke
			Charnockite.
			Peninsular
			Gneissic complex
			and Calc Gneiss

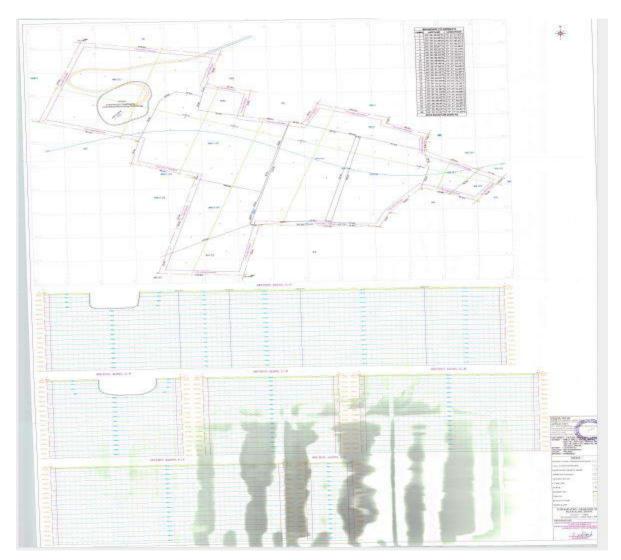


Figure 2.xx - Topography, Geological Plan and Sections

2.7 RESOURCES AND RESERVES

The Resources and Reserves of Rough Stone were calculated based on Cross-Section Method to cover the maximum lease area.

Geological Resources

The quarrying is restricted up to a depth of 82m (below ground level) only, availability of resources is given below.

Table 2.7 Available Geological Resources

Section	Bench	Length	Width	Depth	Gravel in	Rough stone	Bulk	Gravel	Geological Resources of Rough
Section	Bench	in (m)	in (m)	in (m)	m³	inm ³	Density	in Ts	stone in Ts
	1	122	110	2	26840	-	2	53680	-
	II	123	110	5	-	67650	2.75	-	186037.50
	Ш	124	112	5	-	69440	2.75	-	190960.00
	IV	128	130	5	-	83200	2.75	-	228800.00
	V	196	195	5	-	191100	2.75	-	525525.00
	VI	196	195	5	-	191100	2.75	-	525525.00
	VII	196	195	5	-	191100	2.75	-	525525.00
	VIII	196	195	5	-	191100	2.75	-	525525.00
XY-AB	IX	196	195	5	-	191100	2.75	-	525525.00
AT-AD	Х	196	195	5	-	191100	2.75	-	525525.00
	XI	196	195	5	-	191100	2.75	-	525525.00
	XII	196	195	5	-	191100	2.75	-	525525.00
	XIII	196	195	5	-	191100	2.75	-	525525.00
	XIV	196	195	5	-	191100	2.75	-	525525.00
	XV	196	195	5	-	191100	2.75	-	525525.00
	XVI	196	195	5	-	191100	2.75	-	525525.00
	XVII	196	195	5	-	191100	2.75	-	525525.00
		To	otal		26840	2704590	-	53680	7437622.50
	I	74	199	2	29452	-	2	58904	-
	II	74	199	5	-	73630	2.75	-	202482.50
XY-CD	Ш	74	199	5	-	73630	2.75	-	202482.50
	IV	74	199	5	-	73630	2.75	-	202482.50
	V	74	199	5	-	73630	2.75	-	202482.50

	_	_							
	VI	74	199	5	-	73630	2.75	-	202482.50
	VII	74	199	5	-	73630	2.75	-	202482.50
	VIII	74	199	5	-	73630	2.75	-	202482.50
	IX	74	199	5	-	73630	2.75	-	202482.50
	Х	74	199	5	-	73630	2.75	-	202482.50
	XI	74	199	5	-	73630	2.75	-	202482.50
	XII	74	199	5	-	73630	2.75	-	202482.50
	XIII	74	199	5	-	73630	2.75	-	202482.50
	XIV	74	199	5	-	73630	2.75	-	202482.50
	XV	74	199	5	-	73630	2.75	-	202482.50
	XVI	74	199	5	-	73630	2.75	-	202482.50
	XVII	74	199	5	-	73630	2.75	-	202482.50
		То	tal		29452	1178080	-	58904	3239720.00
	ı	104	341	2	70928	-	2	141856	-
	II	104	341	5	-	177320	2.75	-	487630.00
	Ш	104	341	5	-	177320	2.75	-	487630.00
	IV	104	341	5	-	177320	2.75	-	487630.00
	V	104	341	5	-	177320	2.75	-	487630.00
	VI	104	341	5	-	177320	2.75	-	487630.00
VV FF	VII	104	341	5	-	177320	2.75	-	487630.00
XY-EF	VIII	104	341	5	-	177320	2.75	-	487630.00
	IX	104	341	5	-	177320	2.75	-	487630.00
	Х	104	341	5	-	177320	2.75	-	487630.00
	XI	104	341	5	-	177320	2.75	-	487630.00
	XII	104	341	5	-	177320	2.75	-	487630.00
	XIII	104	341	5	-	177320	2.75	-	487630.00
	XIV	104	341	5	-	177320	2.75	-	487630.00

	XV	104	341	5	-	177320	2.75	-	487630.00
	XVI	104	341	5	-	177320	2.75	-	487630.00
	XVII	104	341	5	-	177320	2.75	-	487630.00
		То	tal		70928	2837120	-	141856	7802080.00
	1	181	262	2	94844	-	2	189688	-
	II	181	262	5	-	237110	2.75	-	652052.50
	III	181	262	5	-	237110	2.75	-	652052.50
	IV	181	262	5	-	237110	2.75	-	652052.50
	V	181	262	5	-	237110	2.75	-	652052.50
	VI	181	262	5	-	237110	2.75	-	652052.50
	VII	181	262	5	-	237110	2.75	-	652052.50
	VIII	181	262	5	-	237110	2.75	-	652052.50
XY-GH	IX	181	262	5	-	237110	2.75	-	652052.50
AT-GH	Χ	181	262	5	-	237110	2.75	-	652052.50
	XI	181	262	5	-	237110	2.75	-	652052.50
	XII	181	262	5	-	237110	2.75	-	652052.50
	XIII	181	262	5	-	237110	2.75	-	652052.50
	XIV	181	262	5	-	237110	2.75	-	652052.50
	XV	181	262	5	-	237110	2.75	-	652052.50
	XVI	181	262	5	-	237110	2.75	-	652052.50
	XVII	181	262	5	-	237110	2.75	-	652052.50
		То	tal		94844	3793760	-	189688	10432840.00
	1	117	69	2	16146	-	2	32292	-
	II	117	69	5	-	40365	2.75	-	111003.75
XY-IJ	Ш	117	69	5	-	40365	2.75	-	111003.75
	IV	117	69	5	-	40365	2.75	-	111003.75
	V	117	69	5	-	40365	2.75	-	111003.75

				238210	11159390	-	476420	30688322.50
	То	tal		16146	645840	-	32292	1776060.00
XVII	117	69	5	-	40365	2.75	-	111003.75
XVI	117	69	5	-	40365	2.75	-	111003.75
XV	117	69	5	-	40365	2.75	-	111003.75
XIV	117	69	5	-	40365	2.75	-	111003.75
XIII	117	69	5	-	40365	2.75	-	111003.75
XII	117	69	5	-	40365	2.75	-	111003.75
XI	117	69	5	-	40365	2.75	-	111003.75
Χ	117	69	5	-	40365	2.75	-	111003.75
IX	117	69	5	-	40365	2.75	-	111003.75
VIII	117	69	5	-	40365	2.75	-	111003.75
VII	117	69	5	-	40365	2.75	-	111003.75
VI	117	69	5	-	40365	2.75	-	111003.75

The Geological Resource of Rough Stone : 1,11,59,390 m³

Gravel: 238210 m³

Already excavated

A small quarry pit exists in applied area which was operated by some other lessee before 2015. CCR is not applicable. The existing pit dimension mentioned in the approved mining plan is given below.

Pit No	length (Max) in(m)	Width (Avg) in (m)	Depth (Max) in (m)
I	101	55	17

Available Mineable Reserve:

The Available mineable reserve calculated by deducting 7.5m safety distance and bench loss.

Table 2.8 - Available Mineable Reserves

Table 210 Available Pilleable Reserves										
Bench	Length	Width	Depth	Gravel in	Rough stone	Bulk	Gravel in	Mineable Reserves of		
שפווכוו	in (m)	in (m)	in (m)	m ³	in m ³	Density	(Ts)	rough stone in (Ts)		
I	114	92	2	20976	-	2	41952	-		
II	111	86	5	-	47730	2.75	-	131257.50		
III	107	80		-	42800	2.75	-	117700.00		
IV	106	87	5	-	46110	2.75	-	126802.50		
V	169	142	5	-	119990	2.75	-	329972.50		
VI	164	132	5	-	108240	2.75	-	297660.00		
VII	159	122	5	-	96990	2.75	-	266722.50		
VIII	154	112	5	-	86240	2.75	-	237160.00		
IX	149	102		-	75990	2.75	-	208972.50		
Χ	144	92	5	-	66240	2.75	-	182160.00		
ΧI	139	82	5	-	56990	2.75	-	156722.50		
XII	134	72	5	-	48240	2.75	-	132660.00		
XIII	129	62	5	-	39990	2.75	-	109972.50		
XIV	124	52	5	-	32240	2.75	-	88660.00		
XV	119	42		-	24990	2.75	-	68722.50		
XVI	114	32	5	-	18240	2.75	-	50160.00		
XVII	109	22	5	-	11990	2.75	-	32972.50		
	To	tal		20976	923010	-	41952	2538277.50		
I	74	182	2	26936	-	2	53872	-		
II	74	176	5	-	65120	2.75	-	179080.00		
III	74	166	5	-	61420	2.75	-	168905.00		
IV	74	156	5	-	57720	2.75	-	158730.00		
V	74	146	5	-	54020	2.75	-	148555.00		
VI	74	136	5	-	50320	2.75	-	138380.00		
VII	74	126	5	-	46620	2.75	-	128205.00		
VIII	74	116	5	-	42920	2.75	-	118030.00		
IX	74	106	5	-	39220	2.75	-	107855.00		
	II III IV V VI VII IX X XI XII XIV XVI XVI	I	In (m) I	In (m) I	Bench in (m) in (m) in (m) m³ I 114 92 2 20976 II 111 86 5 - III 107 80 5 - IV 106 87 5 - V 169 142 5 - VI 164 132 5 - VII 159 122 5 - VII 159 122 5 - VII 159 122 5 - VIII 159 122 5 - XIII 139 82 5 - XIII 134 72 5 -	In (m) I	In (m) In (m) In (m) In (m) In m³ In m³ Density I	In (m) I		

1	1	1	1	1	1	1	1	1	1
	X	74	96	5	-	35520	2.75	-	97680.00
	ΧI	74	86	5	-	31820	2.75	-	87505.00
	XII	74	76	5	-	28120	2.75	-	77330.00
	XIII	74	66	5	-	24420	2.75	-	67155.00
	XIV	74	56	5	-	20720	2.75	-	56980.00
	XV	74	46	5	-	17020	2.75	-	46805.00
	XVI	74	36	5	-	13320	2.75	-	36630.00
	XVII	74	26	5	-	9620	2.75	-	26455.00
		To	tal		26936	597920	-	53872	1644280.00
	I	104	324	2	67392	-	2	134784	1
	II	104	318	5	-	165360	2.75	-	454740.00
	III	104	308	5	-	160160	2.75	-	440440.00
	IV	104	298	5	-	154960	2.75	-	426140.00
	V	104	288	5	-	149760	2.75	-	411840.00
	VI	104	278	5	-	144560	2.75	-	397540.00
	VII	104	268	5	-	139360	2.75	-	383240.00
	VIII	104	258	5	-	134160	2.75	-	368940.00
VV 55	IX	104	248	5	-	128960	2.75	-	354640.00
XY-EF	X	104	238	5	-	123760	2.75	-	340340.00
	XI	104	228	5	-	118560	2.75	-	326040.00
	XII	104	218	5	-	113360	2.75	-	311740.00
	XIII	104	208	5	-	108160	2.75	-	297440.00
	XIV	104	198	5	-	102960	2.75	-	283140.00
	XV	104	188	5	-	97760	2.75	-	268840.00
	XVI	104	178	5	-	92560	2.75	-	254540.00
	XVII	104	168	5	-	87360	2.75	-	240240.00
		To	tal		67392	2021760		134784	5559840.00
	I	181	245	2	88690	-	2	177380	-
	II	181	239	5	-	216295	2.75	-	594811.25
VV CU	III	181	229	5	-	207245	2.75	-	569923.75
XY-GH	IV	181	219	5	-	198195	2.75	-	545036.25
	V	181	209	5	-	189145	2.75	-	520148.75
	VI	176	199	5	-	175120	2.75	-	481580.00

	Grand	Total		-	215226	5726860	-	430452	15748865.00
		Total		17m	11232	54500	-	22464	149875.00
	IV	95	26	5	-	12350	2.75	-	33962.50
XY-IJ	III	100	36	5	-	18000	2.75	-	49500.00
	II	105	46	5	-	24150	2.75		66412.50
	I	108	52	2	11232	-	2	22464	-
		То	tal	•	88690	2129670	-	177380	5856592.50
	XVII	121	89	5	-	53845	2.75	-	148073.75
	XVI	126	99	5	-	62370	2.75	-	171517.50
	XV	131	109	5	-	71395	2.75	-	196336.25
	XIV	136	119	5	-	80920	2.75	-	222530.00
	XIII	141	129	5	-	90945	2.75	-	250098.75
	XII	146	139	5	-	101470	2.75	-	279042.50
	ΧI	151	149	5	-	112495	2.75	-	309361.25
	X	156	159	5	-	124020	2.75	-	341055.00
	IX	161	169	5	-	136045	2.75	-	374123.75
	VIII	166	179	5	-	148570	2.75	-	408567.50
	VII	171	189	5	_	161595	2.75	-	444386.25

The Available mineable reserve is computed as 5726860 m³ of Rough stone, 215226 m³ of Gravel upto a depth 82m (below ground level) only.

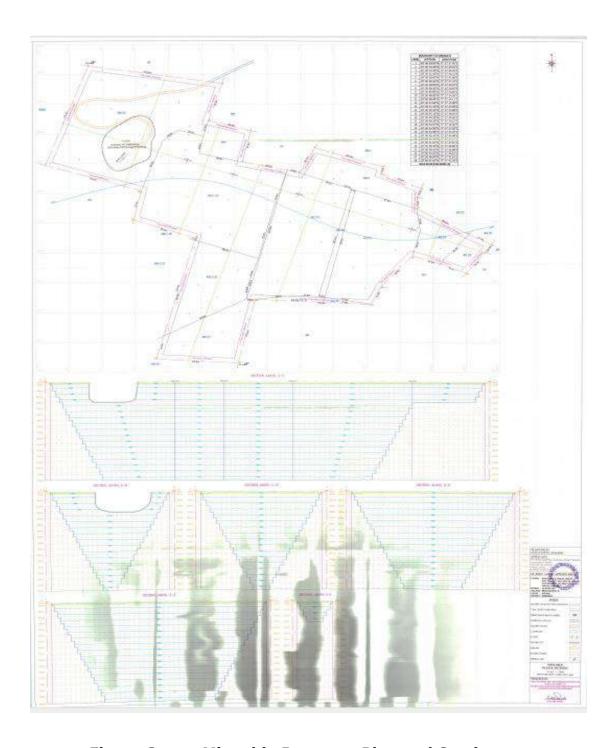


Figure 2.xx - Mineable Reserves Plan and Section

2.8 PROCESS DESCRIPTION AND TECHNOLOGY 2.8.1 PROCESS DESCRIPTON

The quarry operation involves shallow jack hammer drilling, slurry blasting, excavation, Loading and transportation of Rough stone to the needy buyers. The production of Rough stone in this quarry involves the following method which is typical for Rough Stone quarrying in contrast to other major mineral mining.

- Splitting of rock mass of considerable volume from the parent rock mass by jackhammer drilling and blasting, hydraulic excavators are used for loading the Rough Stone from pithead to the needy buyers.
- Occasionally hydraulic excavators are attached with rock breakers for fragmentation to avoid secondary blasting.
- The primary boulders thus splitted are removed from the pits by excavators and further made to smaller sizes by rock breakers attached in excavators.

The process diagram is provided in Figure 2.9. The production plan and cross section and conceptual plan and conceptual cross section is given in Figure No. 2.10 and Figure No. 2.11 respectively.

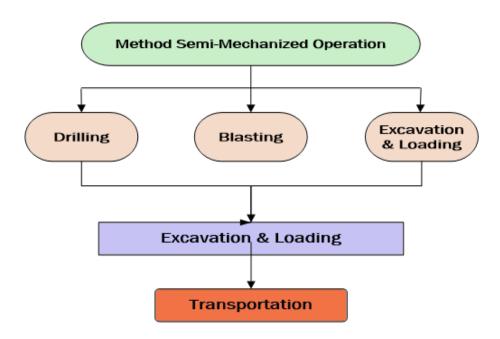


Figure 2.9 Process Flow Diagram

Table 2.9 - Machinery Details

S.No.	Name of the Equipment	Capacity	Requirement
1	Excavator with Rock breaker	0.90 m ³	5
	attachment		
2	Compressor	400 psi	8
3	Jack hammer	32 mm	30
		Dia	
4	Tipper	5/10 T	10

2.8.2 DRILLING AND BLASTING PARAMETERS

Drilling and Blasting will be carried out as per parameters given below,

Table 2.10 - Details of Blasting

Diameter of the hole	32-36 mm
Spacing	0.6m
Depth	1 to 1.5 m
Burden of hole	0.6m
Pattern of hole	Zig zag
Inclination of hole	70º from horizontal
Number of holes	3500
Powder factor	6Ts/Kg of Explosives
Total explosive required	1750 Kg slurry Explosives
Charge / hole	0.5Kg
Blasting time	12-2 Pm

2.8.3 TYPE OF EXPLOSIVE

Slurry explosive is proposed for shattering and heaving effect for removal of rough stone. No deep hole drilling or primary blasting is proposed. The Project Proponent have agreement with M/s. A.R. Enterprises to carry out the blasting operation for the proposed guarry. The Blasting Agreement is enclosed as Annexure – 6.

2.8.4 STORAGE OF EXPLOSIVES

No proposal for storage of explosives within the project area, the applicant will engage authorized explosive agency to carry out the blasting and it will be supervised by competent and statutory foreman / mines manager as per DGMS guidelines.

2.8.5 PRODUCTION SCHEDULE

The year wise production schedule upto lease period of 5 years is given below, the year wise production plan is given in Figure 2.10.

The applicant has proposed to carry out 57,26,860 m3 of Rough Stone and 2,15,410 m3 of Gravel upto a depth of 82 m BGL for the period of five years. The peak production is 11,63,350 m³ (4^{th} year) of rough stone and 1,15,488 m³ (1^{st} year) of Gravel.

Table 2.11 Year wise Production Plan

Year	Section	Bench	Length in (m)	Width in (m)	Depth in (m)	Volume in m ³	Gravel in m ³	Rough stone m ³	Bulk Density	Gravel in (Ts)	Mineable Reserves of rough stone in (Ts)
		I	114	92	2	20976	20976	-	2	41952	-
		II	111	86	5	47730	-	47730	2.75	-	131257.50
	XY-AB	III	107	80	5	42800	-	42800	2.75	-	117700.00
		IV	106	87	5	46110	-	46110	2.75	-	126802.50
		V	169	142	5	119990	-	119990	2.75	-	329972.50
		I	74	182	2	26936	26936	-	2	53872	-
		II	74	176	5	65120	-	65120	2.75	-	179080.00
I	XY-CD	III	74	166	5	61420	-	61420	2.75	-	168905.00
		IV	74	156	5	57720	-	57720	2.75	-	158730.00
		V	74	146	5	54020	-	54020	2.75	-	148555.00
		I	104	324	2	67392	67392	-	2	134784	-
		II	104	318	5	165360	-	165360	2.75	-	454740.00
	XY-EF	III	104	308	5	160160	-	160160	2.75	-	440440.00
		IV	104	298	5	154960	-	154960	2.75	-	426140.00
		V	104	288	5	149760	-	149760	2.75	-	411840.00
		To	tal	•			115488	1125150	-	230608	3094162.50
		I	181	245	2	88690	88690	-	2	177380	
		II	181	239	5	216295	-	216295	2.75	-	594811.25
	XY-GH	III	181	229	5	207245	-	207245	2.75	-	569923.75
	XY-GH	IV	181	219	5	198195	-	198195	2.75	-	545036.25
		V	181	209	5	189145	-	189145	2.75	-	520148.75
II		VI	176	199	5	175120	-	175120	2.75	-	481580.00
		I	108	52	2	11232	11232	-	2	22464	-
	XY-IJ	II	105	46	5	24150	-	24150	2.75	-	66412.50
	X I - I I	III	100	36	5	18000	-	18000	2.75	-	49500.00
		IV	95	26	5	12350	-	12350	2.75	-	33962.50
	XY-EF	VI	74	278	5	102860	-	102860	2.75	-	282865.00
		To	tal			_	99922	1143360		199844	3144240.00
		VI	30	278	5	41700	-	41700	2.75	-	114675.00
111	XY-EF	VII	104	268	5	139360	-	139360	2.75	-	383240.00
III		VIII	104	258	5	134160	-	134160	2.75	-	368940.00
	XY-CD	VI	74	136	5	50320	-	50320	2.75	-	138380.00

		VII	74	126	5	46620	_	46620	2.75	-	128205.00
		VIII	74	116	5	42920	-	42920	2.75	-	118030.00
		VI	164	132	5	108240	-	108240	2.75	-	297660.00
	\/\/ AD	VII	159	122	5	96990	-	96990	2.75	-	266722.50
	XY-AB	VIII	154	112	5	86240	-	86240	2.75	-	237160.00
		IX	149	102	5	75990	-	75990	2.75	-	208972.50
	W CH	VII	171	189	5	161595	-	161595	2.75	-	444386.25
	XY-GH	VIII	166	179	5	148570	-	148570	2.75	-	408567.50
		To	tal			-	-	1132705	-	-	3114938.75
		IX	74	106	5	39220	-	39220	2.75	-	107855.00
	XY-CD	Х	74	96	5	35520	-	35520	2.75	-	97680.00
	XY-CD	ΧI	74	86	5	31820	-	31820	2.75	-	87505.00
		XII	74	76	5	28120	-	28120	2.75	-	77330.00
		IX	104	248	5	128960	-	128960	2.75	-	354640.00
	VV 55	Χ	104	238	5	123760	-	123760	2.75	-	340340.00
T\ /	XY-EF	ΧI	104	228	5	118560	-	118560	2.75	-	326040.00
IV		XII	104	218	5	113360	-	113360	2.75	-	311740.00
	XY-GH	IX	161	169	5	136045	-	136045	2.75	-	374123.75
		Χ	156	159	5	124020	-	124020	2.75	-	341055.00
		ΧI	151	149	5	112495	-	112495	2.75	-	309361.25
	XY-AB	Χ	144	92	5	66240	-	66240	2.75	-	182160.00
		ΧI	139	82	5	56990	-	56990	2.75	-	156722.50
		XII	134	72	5	48240	-	48240	2.75	-	132660.00
		To	tal					1163350		-	3199212.50
		XIII	104	208	5	108160	-	108160	2.75	-	297440.00
		XIV	104	198	5	102960	-	102960	2.75	-	283140.00
	XY-EF	XV	104	188	5	97760	-	97760	2.75	-	268840.00
		IVX	104	178	5	92560	-	92560	2.75	-	254540.00
		XVII	104	168	5	87360	-	87360	2.75	-	240240.00
		IIX	146	139	5	101470	-	101470	2.75	-	279042.50
V		XIII	141	129	5	90945	-	90945	2.75	-	250098.75
	W CH	XIV	136	119	5	80920	-	80920	2.75	-	222530.00
	XY-GH	XV	131	109	5	71395	-	71395	2.75	-	196336.25
		XVI	126	99	5	62370	-	62370	2.75	-	171517.50
		XVII	121	89	5	53845	-	53845	2.75		148073.75
	VV CD	XIII	74	66	5	24420	_	24420	2.75	-	67155.00
	XY-CD	XIV	74	56	5	20720	-	20720	2.75	-	56980.00

		XV	74	46	5	17020	_	17020	2.75	-	46805.00
		XVI	74	36	5	13320	-	13320	2.75	-	36630.00
		XVII	74	26	5	9620	-	9620	2.75	-	26455.00
		XIII	129	62	5	39990	-	39990	2.75	-	109972.50
	XY-AB	XIV	124	52	5	32240	-	32240	2.75	-	88660.00
		XV	119	42	5	24990	-	24990	2.75	-	68722.50
		XVI	114	32	5	18240	-	18240	2.75	-	50160.00
		XVII	109	22	5	11990	-	11990	2.75	-	32972.50
_	Total				-	-	1162295	-	-	3196311.25	
	Grand Total				-	215410	5726860	-	430452	15748865.00	



Figure 2.10 Year wise Development & Production Plan & Sections

2.8.6 DISPOSAL OF WASTE

There is no waste anticipated in this rough stone Quarry. The entire quarried minerals will be utilized. Rough Stone, after the excavation Rough Stone will be directly loaded into tipper to the needy buyers for road project and construction works for filling and leveling of low lying areas.

2.9 CONCEPTUAL MINING PLAN / FINAL MINE CLOSURE PLAN

Conceptual mining plan is prepared with an object of five years of systematic development of bench layouts, selection of ultimate pit limit, depth of quarrying, ultimate pit slope, selection of sites for construction of infrastructure etc.

The ultimate pit size is designed based on certain practical parameters such as economical depth of mining, safety zones, permissible area, etc. Conceptual cross section and mine closure plan is given in Figure 2.11.

Table 2.12 - Ultimate Pit Dimension at the end of Lease period

Pit	Length in m	Width in m	Depth in m		
	(Max)	(Max.)	(Max.), bgl		
I	656	194	82		

Table 2.13 - Land use pattern of the Project site

Description	Present Area in Ha.	Area at the end of life of Quarry in Ha.
Quarrying pit	00.55.50	12.73.00
Infrastructure	Nil	0.02.0
Roads	Nil	0.04.0
Greenbelt	Nil	1.61.00
Unutilized	13.84.50	Nil
Total	14.40.00	14.40.00

- At the end of life of mine, the excavated mine pit / void of 12.73.00 Ha will act as artificial reservoir for collecting rain water and helps to meet out the demand or crises during drought season.
- After mine closure the greenbelt (1.61.00 Ha.) will be developed along the safety barrier and top benches and 0.06 Ha are approach road and Infrastructure.

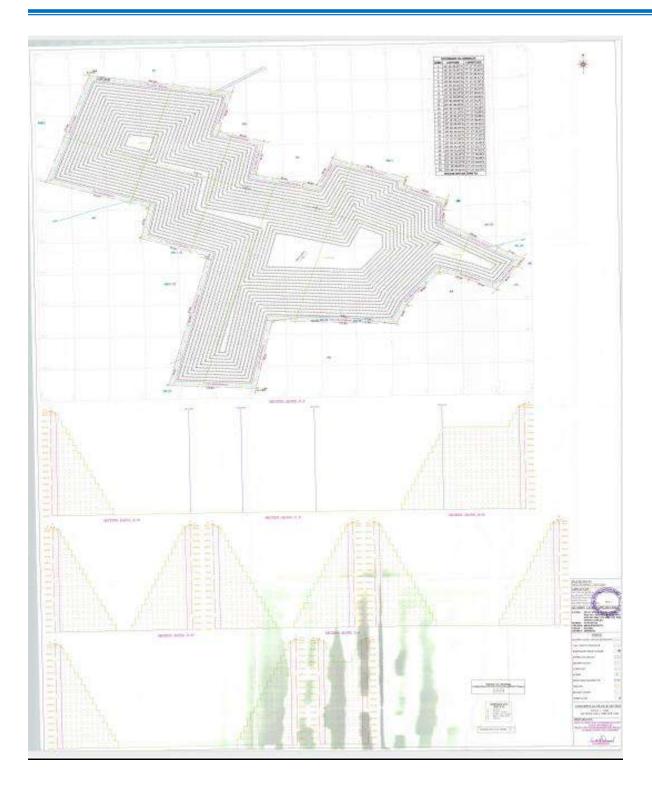


Figure 2.11 Conceptual Plan and Cross Section

2.10 PROJECT REQUIREMENT

2.10.1 WATER REQUIREMENT AND SOURCE

The total water requirement estimated for the quarry is 9.0 KLD. The required water will be procured from outside agencies initially and later rainwater harvested in the mine pit shall be used other than drinking purpose.

Table 2.14 Details of Water requirement

Activity	Water Requirement in KLD
Drinking & Domestic	3.0
Dust Suppression	3.0
Greenbelt Development	3.0
Total	9.0

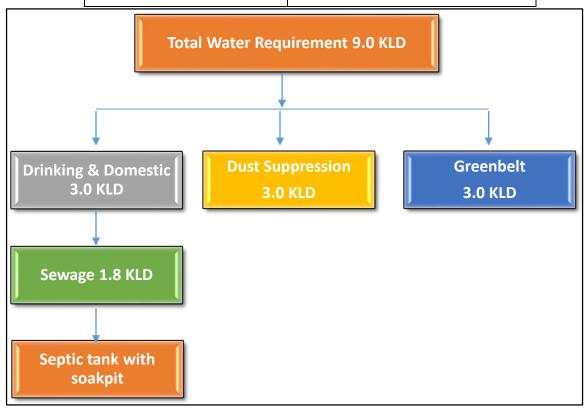


Figure 2.12 Water Balance Chart

2.10.2 POWER REQUIREMENT

All the equipment will be diesel operated. No electricity is needed for mining operation. The minimum power requirement for office, etc will be met from state grid.

2.10.3 FUEL REQUIREMENT

The Total fuel consumption is around 4617.39 L of HSD for the entire period of life (5 years).

2.10.4 EMPLOYMENT GENERATION

The project will provide employment opportunities totally to 41 persons directly and 25 indirectly.

Table 2.16 Details of Manpower requirement

1.	Skilled	Mines Manager	1 No.
		Foreman / Mate	4 No.
		Operator	35 No.
		Mechanic	1 No.
2.	Semi-skilled	Driver	10 No.
3.	Unskilled	Labours	15 Nos
		Total =	66 Nos

2.10.5 GREEN BELT REQUIREMENT

The safety zone, covering an area of 1.61.00 Hectares, will be maintained as a green belt and planted with 1610 Nos. of local species.

2.10.6 VEHICULAR TRAFFIC DENSITY

The final product of the quarry will be transported through Kottathurai to Melkaraipatti Village road, which is located at a distance of 137 m from the proposed quarry in north side. Mineral transport route is shown below:

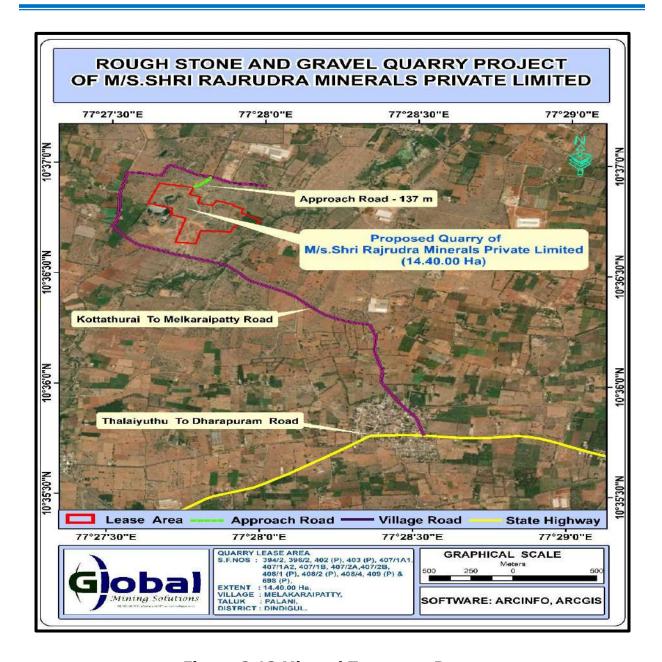


Figure 2.13 Mineral Transport Route

The vehicular traffic survey will be carried out in the route through which mined out minerals are transported. Within 500 m radius, there are two existing quarry and two proposed quarries including this proposal. The final product from this quarry will be transported through Kottathurai to Melkaraipatti Village road, which is located at a distance of 137 m from the proposed quarry in north side.

Methodology Vehicle Count

The vehicles passing through the road (in both ways) were counted separately for 24 hours at the one elected location from 0600 hrs to 0600 hrs next day continuously. Category wise vehicle counting has been done continuously and recorded in the traffic volume count on hourly basis under respective categories.

Categorization of Traffic

The engine driven vehicles were categorized into various heads viz. two wheelers, three wheelers, four wheelers and trucks/bus. The level of service is given below.

(Source: Recommended Design Service Volumes (PCUs per hour), IRC)

Level of Service	General Operating conditions	Range of V/C		
А	Free flow (traffic flows at or above speed limit and motorists have complete mobility between lanes)	<0.30		
В	Reasonable flow (slightly more congested, with some maneuverability)	0.3 – 0.47		
С	Stable flow (more congested than B, loads close to capacity)	0.48 - 0.68		
D	Approaching unstable flow (speeds are somewhat reduced, example: busy corridor during middle of a weekday, or a functional urban highway during rush hour)	0.69 – 0.88		
Е	Unstable flow (flow becomes irregular, speed varies widely and rarely reaches speed limit)	0.88 - 1.00		
F	Forced or breakdown flow (a constant traffic jam)	>1.00		

Table 2.16 – Mineral Transportation

Production Per day in tons								
Ouarry	Total Mineral in tons per day	No. of Lorry Load per day						
Quarry		(20 tons /lorry)						
P1 (Proposed)	11434	572						
P2 (Existing)	2072	104						
P3 (Proposed)	2784	139						
Total	1892	815						

As one existing quarry is already exist, they are part of the current traffic. The proposed project will bring 711 trips per day.

Table 2.17 Summary on Traffic Volume

Route	Existing Traffic Survey in PCU	Incremental Traffic Survey due to project (cluster)	Total traffic survey volume	Hourly capacity in PCU as per IRC -1960 guidelines
Kottathurai to Melkaraipatti Village road	250	266	516	1500

Table 2.18 Modified Level of Service

Route	Existing Volume PCU/hr	Existing V/C Ratio	Additional Volume PCU/hr	Modified Volume PCU/hr	Modified V/C ratio	Modified LOS
Kottathurai to Melkaraipatti Village road	250	0.16	266	0.17	0.33	A*

2.10.7 INFRASTRUCTURE REQUIREMENT

This is a proposed project. Site services like mine office, first aid room, toilets etc. will be provided as semi-permanent structures.

2.10.8 PROJECT COST

The Project cost, including Operational, EMP & CER is 337.75 Lakhs. The proponent is financially sound to meet this financial requirement. Besides, he also has the technical capability to work at quarry.

A. FIXED ASSERT COST			
Particulars Amount			
Land cost	86.40 Lakhs		
First aid room	1.00 Lakhs		
Labour Shed	1.00 Lakhs		
Sanitary Facility	1.00 Lakhs		
Total	89.40 Lakhs		
B. OPERATIONAL COST	r		
Machineries	180.00 Lakhs		
Fencing cost	10.00 Lakhs		
Total	190.00 Lakhs		

C. EMP COST (FOR 5 YEARS) in Lakhs				
Mitigation Measures	Capital cost	Recurring Cost /Annum		
Air Environment	10.92	4.77		
Noise Environment	0.30	0.02		
Waste Management	0.25	0.12		
Mine Closure	1.61	0.32		
Implementation of EC,				
Mining Plan & DGMS	2.35	1.09		
Condition				
Total	15.43	6.32		

The total EMP Cost of 50.35 Lakhs for a period of five years have been proposed. i.e., Capital cost of Rs. 15.43 Lakhs + Recurring cost of Rs. 34.92 lakhs (@ 5% Escalation).

Total	50.35 Lakhs
D. CER COST	
CER Cost	8.00 Lakhs
Grand Tota	337.75 Lakhs
(A+B+C+D)	337.73 Lakiis

2.10.9 PROJECT IMPLEMENTATION SCHEDULE

The proponent proposes to implement the production immediately after obtaining all the statutory approvals. The commercial operation will commence after the grant of Environmental Clearance. CTO and CTE will be obtained from the Tamil Nadu State Pollution Control Board. The conditions imposed during the Environmental Clearance will be compiled before the start of mining operation.

CHAPTER 3 DESCRIPTION OF THE ENVIRONMENT

3.1. STUDY AREA, PERIOD COMPONENTS AND METHODALOGY

The project area is located in Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State over an extent of 14.40.00 Ha., The project area is considered as Core zone and the area in the surrounding 10km radius is considered as Buffer Zone. The baseline environmental monitoring was conducted by Shrient Analytical & Research Labs Private Limited, Chennai it is an NABL and MOEF recognized laboratory for various components of environment, viz. Air, Noise, Water, Land was carried out during Summer Season i.e. March 2025 to May 2025 in the study area covering 10 km radial distance from the rough stone mine. Other environmental data on flora and fauna, land-use pattern, forest etc. were also generated through field surveys and secondary information collected from different State Govt. departments. Sampling methods and analysis. Socio-economic survey was conducted, through interaction with the people, sarpanch and medical officers by floating questionnaires and collection of information are supported by census data for demographic structures, amenities, and infrastructure availability within the study area. Baseline values for various environmental components are discussed in this Chapter.

ENVIRONMENTAL SETTING OF THE STUDY AREA

	Table 3.1 Description of the lease area				
S.No.	Areas	Distance from project site			
1	Areas protected under international conventions, national or local legislation for their ecological, landscape, cultural or other related value	Nil within 10 km radius			

2	Areas which are important or sensitive	for ecological reas	ons	
		Water bodies	Distance	Direction
		Odai	80m	E
		Tank	700m	NE
	Watlanda water course or other	Tank	949 m	NW
Α	Wetlands, water courses or other water bodies,	Tank	1.5 km	SE
		Tank	1.6 km	SE
		Amaravathi River	2.3 km	NW
		Shanmukha River	3.4 km	SE
В	Coastal zone, biospheres,	Nil within 10km ra		
С	Mountains, forests	Dalavaipattinam R	l.F. – 6.8kr	n(N)
3	Areas used by protected, important or sensitive species of flora or fauna for breeding, nesting, foraging, resting, overwintering, migration	Nil within 10 km r	adius	
4	Inland, coastal, marine or underground waters	Nil within 10 km ra	adius	
5	State, National boundaries	Nil within 10 km ra	adius	
6	Routes or facilities used by the public for access to recreation or other tourist, pilgrim areas	Nil within 10 km r	adius	
7	Defense installations	Nil within 10 km r	adius	
8	Densely populated or built-up area	Palani - 17.00 km		
9	Areas occupied by sensitive man- made land uses (hospitals, schools, places of worship, community facilities)	Palani – 17.00 km	- SE	
10	Areas containing important, high quality or scarce resources (ground water resources, surface resources, forestry, agriculture, fisheries, tourism, minerals)	Nil		
11	Areas already subjected to pollution or environmental damage. (those where existing legal environmental standards are exceeded)	Nil		
12	Areas susceptible to natural hazard which could cause the project to present environmental problems (earth quakes, subsidence, landslides, erosion, flooding or extreme or adverse climatic conditions) similar effects	No. The area is n floods, etc.	ot prone t	o earthquakes,

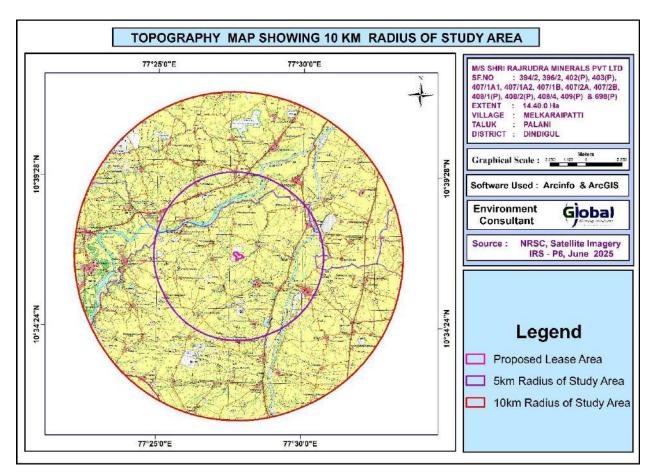


FIG 3.1 ENVIRONMENTAL SETTING OF THE STUDY AREA

STUDY PERIOD

The relevant information and data (both primary and secondary) were collected in core as well as buffer zone (10 km distance from the mine boundary) during Summer Season (March., to May., 2025) in accordance with the guidelines for preparation of EIA studies in order to assess the impact of the mine site within the 10 Km study area on existing physical, biological and social environment.

3.2 ESTABLISHMENT OF BASELINE FOR VALUED ENVIRONMENTAL COMPONENTS:

Information on the following components/parameters were collected to understand the existing scenario of the core and buffer area:

- Meteorological environment
- ♣ Air environment
- Water environment
- Noise environment
- Soil environment
- Biological environment
- ♣ Land use & Land cover
- Socio economic environment
- Hydrogeology

BASELINE DATA COLLECTION

Baseline environment data on various components of the environment in the study area were collected during Summer Season (March., to May., 2025) to assess the present scenario of the area. Details are given in the table given below.

Baseline data collection During Post Monsoon Season (March., to May., 2025)

Sr.No	Environmen	Primary data			
	tal Component	Parameters	Frequency	Monitoring/S ampling locations	
1	Land	Agriculture, Habitation, Industry, Stony waste/ Quarries, Forest area, Plantation/ Vegetation, Open scrub, Water bodies etc.	Once in a Season	10 km radius study area	
2	Meteorology	Temperature, Relative Humidity, Wind Speed, Wind Direction.	Hourly	1	
3	Air	PM10, PM2.5, SO2, NO2, CO & PAH	twice a week (24 hourly)	7	
4	Noise	Equivalent noise levels in Leq in dB (A)	Once in a season (day & night time)	7	
5	Water	Parameters as per IS 10500 - 2012	Once in a season		
А	Surface Water	Parameters as per IS 10500 - 2012	Once in a season	2	
В	Ground Water	Parameters As per IS 2720/USDA	Once in a season	7	

6	Soil	Parameters As per IS	Once in a	7
		2720/USDA	season	
7	Biological	Flora and Fauna	Once in a	Study Area
	Environment		season	
8	Socio-	Socio-Economic	Once in a	Study Area
	Economic	Environment	season	
	Environment			

INSTRUMENTS USED FOR ENVIRONMENTAL BASELINE DATA COLLECTION

The following instruments were used at the site for environmental baseline data collection work.

- Respirable Dust Sampler with attachment for gaseous Pollutants, Envirotech APM 460.
- Fine Particulate Matter (FPS) Sampler APM 550
- Sound Level Meter Model Envirotech SLM 100
- Digital D.O. Meter Model 831 E (CPCB Kit)
- Weather Monitoring Station Model Enviro WM 271
- · Water Level Indicator and
- Global Positioning System (GPS) Apart from collecting samples of air, water, noise and soil from representative sampling points given in proceeding sections, the data on land use, vegetation and agricultural crops were also collected by the field team through interaction with a large number of local inhabitants of the study area and different Government departments/agencies. This provided an excellent opportunity to the members of the field team for obtaining clear scenario of the existing environment of the study area.

3.3. BASE MAP OF ALL ENVIRONMENTAL COMPONENTS (ENUMERATION OF THE STRUCTURES LOCATED WITHIN 300 m RADIUS FROM THE PROPOSED QUARRY SITE)


A site survey has been conducted to identify and list structures located within a 300 m radius from the proposed Quarry and are detailed below. There are permanent structures within a 300m radius from the project site. The PP has obtained a letter from Village Administrative Office (VAO), Melkaraipatti stating that there are no structures situated within 300 Km radius.

Table 3.xx - Structures within 300 m radius

S. No	Name of the Structure	Distance and Direction	Ownership	Occupant	Туре	Age
S1 - S4	Cruhser unit and its office	54m (S)	Belongs to PP	-	Concrete	< 2 Years
S5	Windmill	150m (E)		-	-	
S6	Windmill	160m (NE)		-	-	
S7	Windmill	200m (N)	Not Belongs	-	-	> 5 Years
S8	Farm Shed	194m (SW)	to the PP	-	Tiled Shed	
S9	Windmill	240m (S)		-	-	
S10	Temporary shed	297m (SE)		-	G.I sheet	

FIG 3.2 GOOGLE MAP SHOWING 50M INTERVAL FOR 300 M RADIUS FROM THE LEASE AREA

ENUMERATION OF THE STRUCTURES LOCATED WITHIN 300m RADIUS FROM THE PROPOSED PROJECT SITE

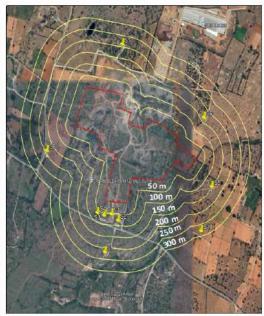


S. No	Name of the Structure	Distance and Direction	Ownership	Occupant	Туре	Age
S1 -S4	Cruhser unit and its office	54m (S)	Belongs to PP	-	Concrete	< 2 Years
SS	Windmill	150m (E)	Not Belongs to	*	8	
S6	Windmill	160m (NE)		6 8 8		
S7	Windmill	200m (N)		348	=	> 5 Years
S8	Farm Shed	194m (SW)	the PP		Tiled Shed	
59	Windmill	240m (S)		12		
S10	Temporary shed	297m (SE)		(5)	G.I sheet	

Figure 3.xx - Photographs of Structures located within 300 m radius



FIGURE - 3.2a SATELLITE MAP OF THE PROJECT AREA (10 KM RADIUS)

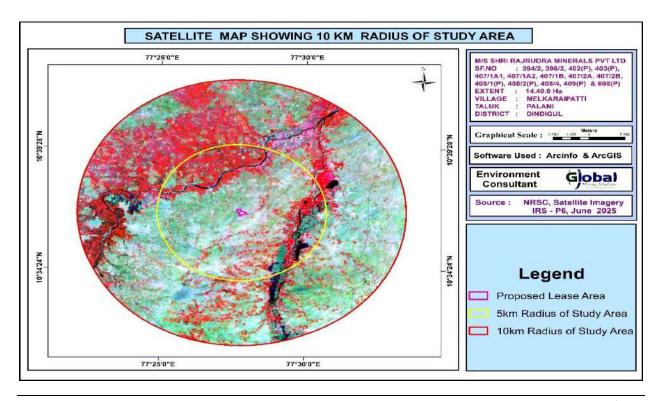

3.3.1 <u>METEOROLOGICAL ENVIRONMENT</u>

Meteorological conditions prevailing in the buffer zone is given below

Climate

The climatic conditions of Dindigul are characterized by a tropical climate. This climate is considered to be Aw according to the Köppen-Geiger climate classification. In Dindigul, the average annual temperature is 27.2 °C | 80.9 °F. Each year, there is an approximate 1480 mm | 58.3 inch of precipitation that occurs.

Rainfall

The average annual precipitation amounts to about 1582 mm (62.3 inches) and receives 188 rainy days on the 1 mm (0.04 inches) threshold annually. The month with the most rainy days is October (21.60 days). The month with the fewest rainy days is February (4.13 days).

Rainfall received from 2017 to 2023 is given below.

Table 3.2 Rainfall data										
Actual Rainfall in mm							Normal rainfall in			
2017	2018	2019	2020	2021	2022	2023	raintali in mm			
922.8	535.5	712.8	704.5	725.4	812	629.7	812			

Relative Humidity

The month with the highest relative humidity is November (78.37). The month with the lowest relative humidity is March (51.20 percent).

Seismic information

The study area falls in Zone II, which comes under the least active zone. The seismic map of India is given as Fig 3.3.

FIG 3.3 SEISMIC MAP OF INDIA

Table 3.3 Meteorological Data Recorded at Site

S.NO	Parameters		October to December 2023
		Min	15
1.	Temperature (°C)	Max.	35
		Avg	26
		Min	16
2.	2. Relative Humidity (%)	Max	96
		Avg	66
		Min	0
3.	Wind Speed (m/s)	Max	6.2
		Avg	3.1
4.	Wind Direction	Blowing From -	- W

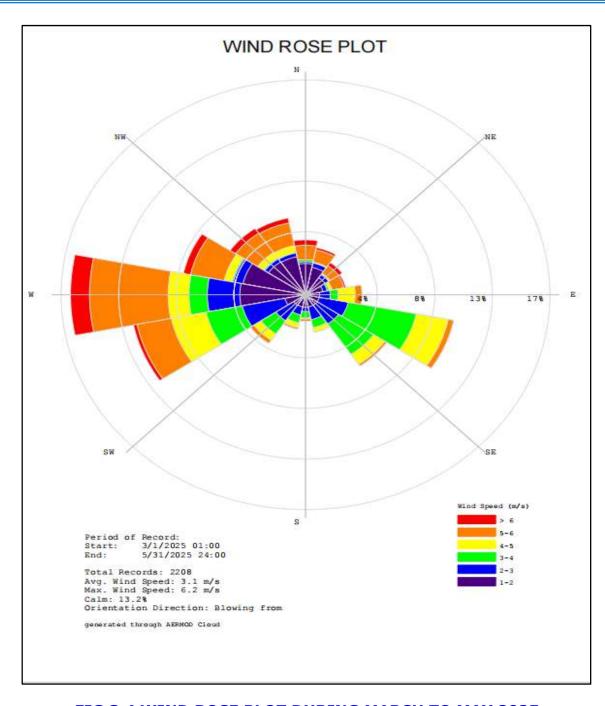


FIG 3.4 WIND ROSE PLOT DURING MARCH TO MAY 2025

3.3.2 AMBIENT AIR MONITORING DATA


Ambient air quality monitoring has been carried out in 7 locations. One in the core zone and remaining six locations in the buffer zone areas. Monitoring locations have been chosen such that the measurement represents the overall air condition prevailing in the area. The study area represents mostly rural environment with stone mining quarries & crushers.

The regional climatologically data, was used as a guideline to know the predominant wind direction during study period. The locations were identified keeping in view predominant wind directions prevailing during study period, sensitive receptors, human settlements, and mining activities around.

The levels of Respirable Particulate Matter (PM10), Fine Particulates (PM2.5), Sulphur Dioxide (SO2) and Oxides of Nitrogen (NOx) were monitored for establishing the baseline status. PM10 were sampled with the help of Respirable Dust Samplers on filter papers and SO2 & NOx were absorbed in the respective absorption media in the impingers attached to RD samplers and analyzed Spectrophotometrically. PM2.5 was monitored with the help of Fine Particulate Samplers. The monitoring locations for ambient air study are given in Table – 3.3 and Figure 3.5 below.

	Table 3.3: Details Of Ambient Air Quality Monitoring Locations									
S. No.	Station Code	Locations	Distance & Direction	Coordinates						
1	AAQ 1	Project site	Core Zone	10°36'55.79"N & 77°28'11.26"E						
2	AAQ 2	Panampatty	1.90 km (SW)	10°35'38.89"N & 77°27'19.75"E						
3	AAQ 3	Kottathurai	1.21 km (NE)	10°37'11.27"N & 77°28'26.86"E						
4	AAQ 4	Melkaraipatty	1.74 km (SE)	10°35'52.90"N & 77°28'24.56"E						
5	AAQ 5	Keeranur	3.98 km (SE)	10°35'49.56"N & 77°29'53.13"E						
6	AAQ6	Rajampatti	1.52 km (W)	10°37'10.21"N & 77°26'52.67"E						
7	AAQ7	Bommanallur	6.18 km (E)	10°36'43.79"N & 77°31'22.60"E						

FIG 3.5 BASE MAP OF AMBIENT AIR MONITORING LOCATIONS

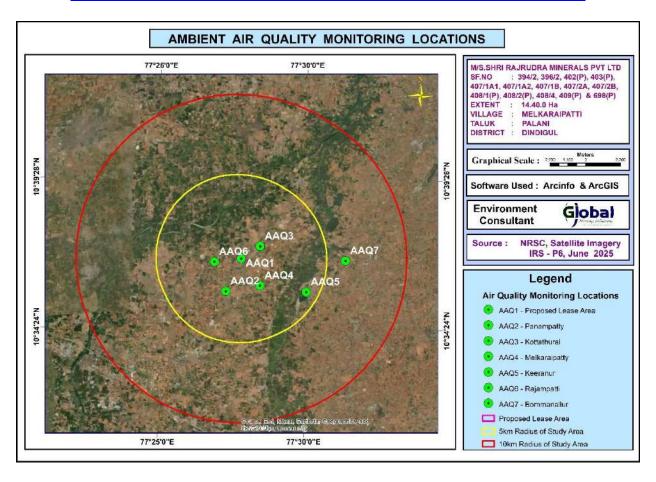


The concentrations of various air pollutants at the 7 locations are given below. For all the components in the table, the unit are in $\mu g/m^3$.


Table.3.4 Results of Air sampling Analysis in 7 locations

Station ID	Min	Max	Avg.
	Particulate matte	r PM- _{2.5 (} μg/m³)	
AAQ-1	25.5	37.10	31.97
AAQ-2	24.8	32.6	27.9
AAQ-3	22.4	27.6	24.4
AAQ-4	19.7	29.2	24.1
AAQ-5	23.3	31.4	26.8
AAQ-6	24.3	29.5	26.3
AAQ-7	20.5	25.7	22.5
	CPCB NAAQS 2009 fo		
	Particulate matte	````	
AAQ-1	55.6	80.4	69.36
AAQ-2	52.8	69.4	59.4
AAQ-3	48.6	59.9	53.1
AAQ-4	42.8	59.4	51.8
AAQ-5	50.8	68.4	58.3
AAQ-6	52.8	64.1	57.3
AAQ-7	44.4	55.7	48.9
	CPCB NAAQS 2009 fo		
	Sulphur Di-oxide		
AAQ-1	6.7	9.6	7.79
AAQ-2	4.9	7.2	6.0
AAQ-3	4.6	6.6	5.7
AAQ-4	4.4	6.7	5.5
AAQ-5	5.7	7.7	6.7
AAQ-6	5.5	7.5	6.6
AAQ-7	4.8	6.8	5.9
	CPCB NAAQS 2009 f		
	Oxide of Nitrogen		
AAQ-1	10.8	15.5	12.84
AAQ-2	7.1	10.2	8.8
AAQ-3	6.7	9.9	8.3
AAQ-4	6.0	8.3	7.2
AAQ-5	9.4	11.4	10.5
AAQ-6	9.7	12.9	11.3
AAQ-7	7.7	10.9	9.3
	CPCB NAAQS 2009 f	or NO ₂ – 80 μg/m ³	

The results are summarized in graph and given as below Fig. 3.6

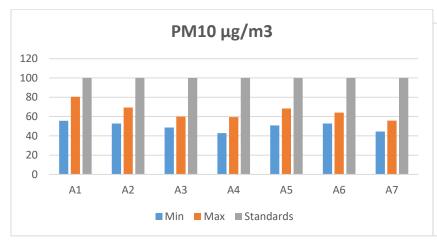



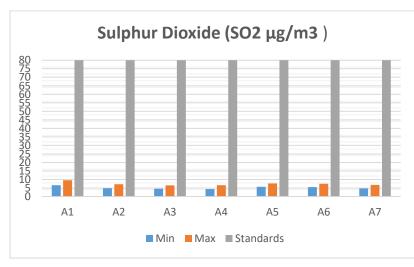

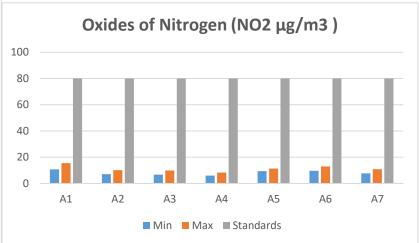


FIG 3.6 GRAPHICAL REPRESENTATION OF AMBIENT AIR QUALITY DATA

Interpretations & Conclusion

As per monitoring data, PM10 ranges from 42.80 μ g/m³ to 80.40 μ g/m³, PM2.5 data ranges from 19.70 μ g/m³ to 37.10 μ g/m³, SO2 ranges from 4.40 μ g/m³ to 9.60 μ g/m³ and NO2 data ranges from 6.0 μ g/m³ to 15.50 μ g/m³.

The monitoring data indicates that the maximum values of monitored parameters—PM10, PM2.5, SO2, and NO2—are observed in the mine lease area. The main contributing factor is that there is an crusher at 54 m in southern side, also two existing quarries within 500 m radius of the project site, where the vehicular traffic will be more.

The minimum values of PM10, PM2.5, SO2 and No2 are found in Melkaraipatty Village.

From the above results, it is observed that the ambient air quality with respect to PM_{10} , $PM_{2.5}$, SO_2 , and NO_2 at all the monitoring locations was within the permissible limits specified by CPCB. CO value at all the monitored locations BDL.

3.3.3 WATER ENVIRONMENT

The water resources, both surface and groundwater play a significant role in the development of the area. The purpose of this study is to assess the water quality characteristics for critical parameters and evaluate the impacts on agricultural productivity, domestic community usage, recreational resources and aesthetics in the vicinity. The water samples were collected and transported as per the standard guidelines issued by CPCB for analysis.

Reconnaissance survey was undertaken and monitoring locations were selected based on:

- Location of the major water bodies
- Location of project site, their water intake and effluent disposal locations
- Likely areas that can represent baseline conditions
- The water samples were collected and were analyzed for physical, chemical, and biological characteristics as per guidelines issued by IS code No.10500/2012.

Assessment of baseline data on water environment includes:

- Identification of water resources
- Collection of water samples
- Analyzing water samples collected for physico-chemical parameters as per standards.

Surface Water

There is three tanks situated within 1 km radius of the area. The following water bodies are in the study area.

Water bodies	Distance	Direction
Odai	80m	E
Tank	700m	NE
Tank	949 m	NW
Tank	1.5 km	SE
Tank	1.6 km	SE
Amaravathi River	2.3 km	NW
Shanmukha River	3.4 km	SE

The rainfall over the area is moderate, the rainwater storage in open wells, trenches is in practice over the area and the stored water acts as source of freshwater. The prevailing status of surface water quality has been assessed during the study period. Surface water quality locations and results are provided in Table 3-14 and Figure 3.11.

Ground Water

In Dindugal District, during the pre monsoon, the water level generally in declining trend ranges from G.L. to 15m. The depth of well below Ground Level 12.0m are become dry during hot season like May, June, July. In the post monsoon, the water level generally in upward trend due to rainfall and it may reach the Ground Level also.

Total Seven (07) ground water monitoring locations were identified for assessment in different villages around the project site based on the usage of sub surface water by the settlements/ villages in the study area. The groundwater results are compared with the acceptable and permissible water quality standards as per IS: 10500 (2012) for drinking water. Groundwater quality monitoring locations and results are given in Table 3.5 and Figure 3.11.

Sampling Locations

Two (2) surface water samples and Seven (7) ground water samples were collected from the study area and were analysed for physio-chemical, heavy metals and bacteriological parameters in order to assess the effect of mining and other activities on water bodies. The samples were analysed as per the procedures specified by CPCB, IS-10500:2012. The water sampling locations are given in Table 3.5 and shown as Figure 3.12.

The monitoring locations were selected based on:

- Location of the major water bodies
- · Location of project site,
- Likely areas that can represent baseline conditions Water bodies nearby

Table 3.5 Water Sampling Locations

S.NO	Location	Monitoring Locations	Latitude and longitude
	Code		
Surfac	ce Water		
1	SW1	Amaravathi River – up	10°38'46.33"N & 77°27'57.72"E
		stream	
2	SW2	Amaravathi River – down	10°37'48.63"N & 77°26'27.16"E
		stream	
Groun	d Water		
1	GW1	Project site	10°36'55.79"N & 77°28'11.26"E
2	GW2	Panampatty	10°35'38.89"N & 77°27'19.75"E
3	GW3	Kottathurai	10°37'11.27"N & 77°28'26.86"E
4	GW4	Melkaraipatty	10°35'52.90"N & 77°28'24.56"E
5	GW5	Keeranur	10°35'49.56"N & 77°29'53.13"E
6	GW6	Rajampatti	10°37'10.21"N & 77°26'52.67"E
7	GW7	Bommanallur	10°36'43.79"N & 77°31'22.60"E

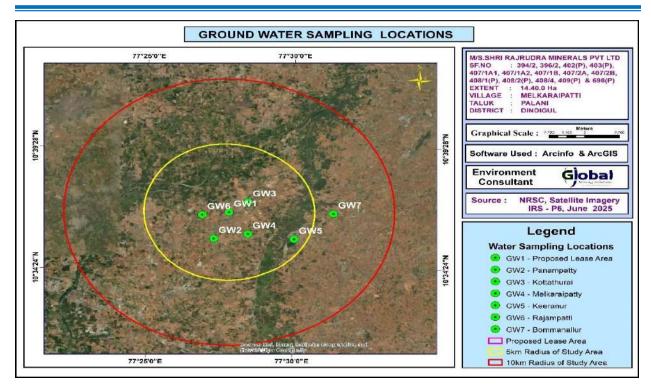


FIG 3.7 BASE MAP OF GROUND WATER SAMPLING LOCATIONS

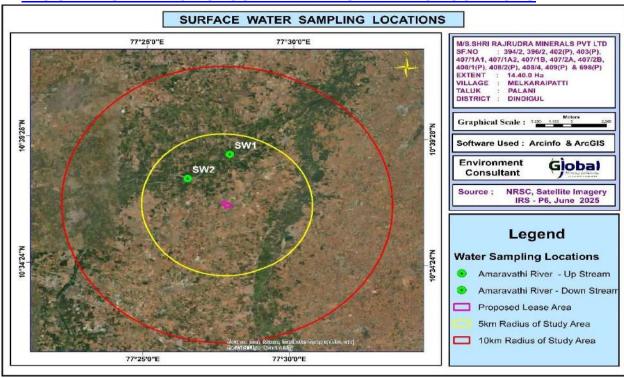


FIG 3.8 BASE MAP OF SURFACE WATER SAMPLING LOCATIONS

Page **119** of **233**

Table 3.6 Surface Water Analysis Results

Sr.No	Parameter	Unit	SW1	SW2	Surface water standard s (IS 2296 Class-A)
1	Odour	1	Agreeable	Agreeable	-
2	Turbidity	NTU	<1.0	<1.0	1
3	pH at 25 °C	-	7.90	7.82	6.5-8.5
4	Electrical Conductivity	μs/cm	228	194	-
5	Total Dissolved Solids	mg/l	138	116	500
6	Total hardness as CaCO3	mg/l	80.2	75	-
7	Calcium as Ca	mg/l	16.1	15.4	300
8	Magnesium as Mg	mg/l	9.6	8.8	-
9	Calcium as CaCO3	mg/l	40.3	38.4	-
10	Magnesium as CaCO3	mg/l	39.9	36.8	-
11	Total alkalinity as CaCO3	mg/l	42.8	36.7	-
12	Chloride as CI-	mg/l	30.6	35.2	250
13	Free Residual chlorine as CI-	mg/l	BDL (D.L - 0.2)	BDL (D.L - 0.2)	-
14	Sulphates as SO42-	mg/l	14.9	15.2	400
15	Iron as Fe	mg/l	BDL(D.L - 0.01)	BDL(D.L - 0.01)	0.3
16	Nitrate as NO3	mg/l	BDL(DL-1.0)	1.65	20
17	Fluoride as F	mg/l	0.26	0.21	1.5
18	Manganese as Mn	mg/l	BDL (D.L - 0.05)	BDL(D.L-0.05)	0.5
19	COD	mg/l	BDL (D.L - 4.0)	BDL (D.L - 4.0)	-
20	BOD	mg/l	BDL (D.L - 2.0)	BDL (D.L - 2.0)	-
21	TSS	mg/l	BDL(DL-2.0)	BDL(DL-2.0)	-
22	DO	Mg/l	6.3	6.2	6.0

The samples were analyzed by M/s.Shrient Analytical & Research Labs Private Limited; Chennai and the results are summarized below.

		Ta	<u>ble 3.7 - Re</u>	sults of Gro	und Water	Sampling A	nalysis		
parameter	GW1	GW2	GW3	GW4	GW5	GW6	GW7	Specification/Limit (Aper IS:10500: 2012)	
								Acceptable	Permissible Limits
Odour	AGREEA BLE	AGREEAB LE	AGREEAB LE	AGREEAB LE	AGREEAB LE	AGREEAB LE	AGREEABLE	Agreeable	Agreeable
Turbidity	<1	<1	<1	<1	<1	<1	<1	1	5
pH at 25 °C	7.27	7.75	7.26	7.39	7.25	7.99	7.42	6.5- 8.5	No relaxation
Electrical Conductivity	1094	1020	1334	1422	920.2	735.8	846.9	-	-
Total Dissolved Solids	656	612	800	854	552	442	510	500	2000
Total hardness as CaCO ₃	334	172	575	482	387	214	282	200	600
Calcium as Ca	81.6	43.2	132	108	106	48.4	72.0	75.0	200
Magnesium as Mg	31.2	15.4	58.8	50.9	29.0	22.3	24.5	30.0	100
Calcium as CaCO₃	204	108	330	270	266	121	180	-	-
Magnesium as CaCO₃	130	64.0	245	212	121	93.0	102	-	-
Total alkalinity as CaCO₃	447	176	382	438	284	201	234	200	600
Chloride as Cl-	126	374	255	211	146	138	155	250	1000
Free Residual chlorine as Cl ⁻	BDL (D.L - 0.2)	BDL(D.L- 0.2)	BDL(D.L- 0.2)	BDL (D.L- 0.2)	BDL(D.L- 0.2)	BDL (D.L - 0.2)	BDL (D.L - 0.2)	0.2	1
Sulphates as SO ₄ ² -	150	76.5	104	155	33.2	53.6	57.9	200	400
Iron as Fe	BDL(D.L - 0.01)	BDL(D.L - 0.01)	BDL(D.L - 0.01)	BDL(D.L - 0.01)	BDL(D.L - 0.01)	0.06	0.07	0.30	0.3
Nitrate as NO ₃	3.56	1.66	3.05	2.57	2.96	1.45	2.77	45	45
Fluoride as F	0.35	0.32	0.48	0.39	0.34	0.49	0.44	1	1.5
Manganese as Mn	BDL (D.L - 0.05)	BDL(D.L- 0.05)	BDL(D.L- 0.05)	BDL(D.L- 0.05)	BDL(D.L- 0.05)	BDL (D.L - 0.05)	BDL (D.L - 0.05)	1	0.3

Some of the common parameters including EC, TDS, Total Hardness, Total Alkalinity, Chlorides and Sulphates in the 7 locations were plotted and the graph is provided below.

FIG 3.9 VALUES OF FEW COMMON PARAMETERS IN GROUND WATER

ANALYSIS


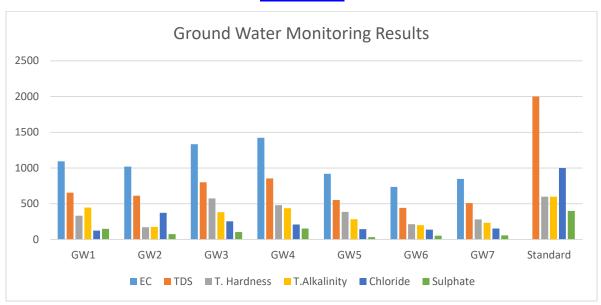


FIG 3.10 VALUES OF FEW COMMON PARAMETERS IN SURFACE WATER

ANALYSIS

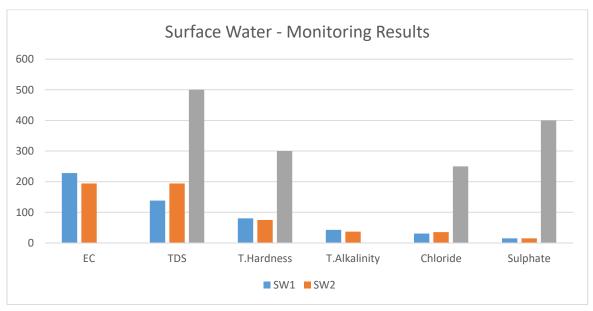

Interpretation& Conclusion

Ground Water Quality

Ground Water Quality results were compared with Acceptable limits for Drinking Water as per the Standard IS 10500:2012. Some parameters of Water samples did not meet the acceptable limits of IS 10500: 2012, as the values of few of the tested parameters in source exceed the acceptable limits.

- pH of the water samples ranged from 7.25 -7.99 pH in water samples collected from all the locations are within the acceptable limits limit.
- Iron in water samples collected from all the locations were also within permissible limits.
- Total Dissolved Solids found in the range of 442 854 mg/l from Seven locations and in some locations the values were exceeds the acceptable limits. The maximum TDS value was found at Melkaraipatty Village.
- Total Hardness of water sample varied between 172 575 mg/l and the maximum value recorded at Kottathurai Village. All seven sample's TH exceeds the Acceptable limits except one location i.e. Panampatty Village.
- Chloride in the water samples ranged from 126 374 mg/l. Chlorides values are within the within the acceptable limits except in two locations i.e in Panampatty Village and Kottathurai Village. Turbidity from the water samples were within the acceptable limit.

Surface Water Quality

pH:

The pH varied from 7.82 to 7.90 while turbidity found within the standards (Optimal pH range for sustainable aquatic life is 6.5 to 8.5 pH)

Total Dissolved Solids:

Total Dissolved Solids varied from 116 to 138 mg/l, the TDS mainly composed of carbonates, bicarbonates, Chlorides, phospates and nitrates of calcium, agnesium, sodium and other organic matter.

Other parameters:

Chloride varied between 30.6 mg/l and 35.2 mg/l. Nitrates varied from 0 to 1.65 mg/l, while sulphates varied from 14.9 to 15.2 mg/l.

All the values were found to be within the permissible limits.

3.3.4 NOISE MONITORING

The vehicular movement on road and mining activities is the major sources of noise in study area, the environmental assessment of noise from the mining activity and vehicular traffic can be undertaken by taking into consideration various factors like potential damage to hearing, physiological responses, and annoyance and general community responses.

The main objective of noise monitoring in the study area is to establish the baseline noise level and assess the impact of the total noise expected to be generated during the project operations around the project site.


Noise Level Monitoring

1	Monit	oring Period		Summer	(March – May 2025)
2	Monit	oring Locations			
	Code	Location Name	Distance in km	Direction	Coordinates
	N1	Project site	Core Zone	-	10°36'55.79"N & 77°28'11.26"E
	N2	Panampatty	1.90 km	SW	10°35'38.89"N & 77°27'19.75"E
	N3	Kottathurai	1.21 km	NE	10°37'11.27"N & 77°28'26.86"E
	N4	Melkaraipatty	1.74 km	SS	10°35'52.90"N & 77°28'24.56"E
	N5	Keeranur	3.98 km	SE	10°35'49.56"N & 77°29'53.13"E
	N6	Rajampatti	1.52 km	W	10°37'10.21"N & 77°26'52.67"E
	N7	Bommanallur	6.18 km	Е	10°36'43.79"N & 77°31'22.60"E

3 Methodology

Noise levels were measured using sound level meter. Sound Pressure Level (SPL) measurements were measured at all locations where ambient air quality monitored; one reading for every hour was taken for 24 hours.

FIG 3.11 BASE MAP OF NOISE MONITORING LOCATIONS

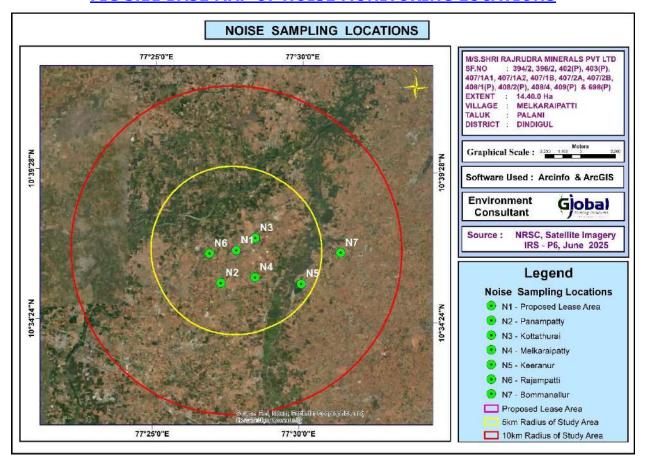


The results are given in Table below.

	Table 3.8 Noise monitoring results											
S. No	Location	Day equivalent	Night equivalent	Day equivalent limits by CPCB	Night equivalent limits by CPCB							
1	Project site	50.1	40.4	75	70							
2	Panampatty	45.7	39.8									
3	Kottathurai	43.6	40.5									
4	Melkaraipatty	46.5 41.0		55	45							
5	Keeranur	51.3	42.2									
6	Rajampatti	47.7	42.5									

7	Bommanallur	50.0	42.0	

The results are plotted as below.

FIG 3.12 DAY AND NIGHT EQUIVALENT VALUES IN 5 LOCATIONS

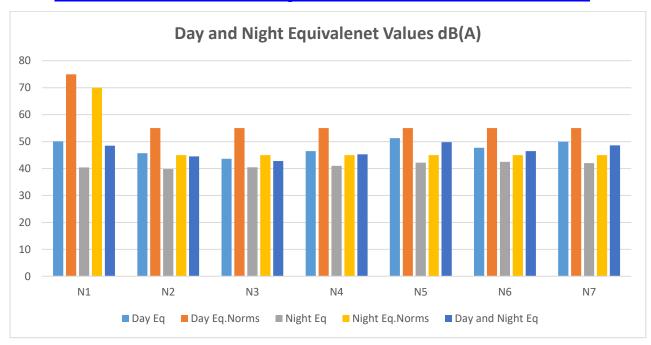

Interpretation& Conclusion

Day Time Noise Levels: The day time noise levels at Core zone were observed as 50.1 dB (A) being well within the Industrial area prescribed limit of 75 dB (A) whereas the noise levels at all locations of Buffer zone were observed to be in the range of 43.6 – 51.30 dB (A) being well within the Residential area prescribed limit of 55 dB (A) as per CPCB Standard.

Night Time Noise Levels: The night time noise levels at all locations of buffer zone villages were observed to be in the range of 39.8 – 42.50 dB (A) being well within the residential area prescribed limit of 45 dB (A) whereas the Noise level in the core Zone was observed as 40.4 dB (A) which is also within the prescribed limit of 70 dB (A) as per CPCB Standard for Industrial Areas.

SOIL SAMPLING ANALYSIS

The major soil types found in the study area are Loamy sand, Sandy Clay Loam and sandy loam. Soil samples have been collected from the mine lease area and 6 other locations from Panampatty, Kottathurai, Melkaraipatty, Keeranur, Rajampatti and Bommanallur Villages. The locations are shown in figure below.

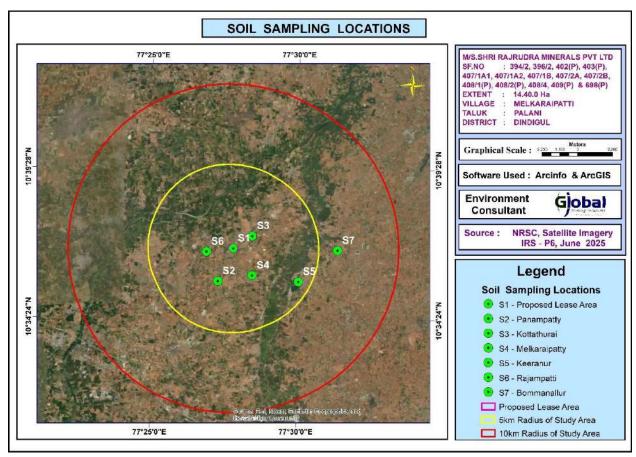


FIG 3.13 BASE MAP OF SOIL SAMPLING LOCATIONS

The results are summarized in the table below.

	Table 3.9 Results of soil sample analysis											
S. No	Parameter	Unit	S1	S2	S3	S4	S5	S6	S7			
1	pH at 25 °C	-	7.85	6.52	6.97	7.05	7.12	6.78	6.99			
2	Electrical Conductivity	µmhos/ cm	105	75.62	152	90.47	165	89.74	95.47			
3	Dry matter content	%	91.24	94.65	94.72	95.74	94.21	95.66	94.23			
4	Water Content	%	8.76	5.35	5.28	4.26	5.79	4.34	5.77			
5	Organic Matter	%	0.62	1.33	1.21	0.94	1.24	1.05	1.33			
6	Soil texture	-	SILT LOAM	silty clay	silty clay loam	silt loam	silty clay loam	silt Ioam	loam			
7	Grain Size Distribution	%										
	i. Sand		26.54	8.92	13.55	24.74	13.69	29.21	34.52			
8	ii. Silt	%	58.62	47.46	47.52	68.72	48.21	53.64	50.33			
9	iii. Clay	%	14.84	43.62	38.93	6.54	38.10	17.15	15.15			
10	Phosphorous as P	mg/kg	0.94	1.72	2.31	1.74	1.89	1.77	1.34			
11	Sodium as Na	mg/kg	778	432	725	597	705	375	402			
12	Potassium as K	mg/kg	520	662	895	794	870	712	616			
13	Nitrogen and Nitregenous Compounds	mg/kg	356	269	288	642	321	230	450			
14	Total Soluble Sulphate	%	BDL(D.L. 0.02)	BDL(D.L. 0.02)	BDL(D. L.0.02)	BDL(D. L.0.02)	BDL(D. L.0.02)	BDL(D .L.0.02	BDL(D .L.0.0 2)			
15	Porosity	%	19.4	18.5	19.4	18.3	19.2	19.6	19.8			
16	Water Holding Cabacity	Inches/ foot	42	40	42	40	42	40	42			

Interpretation

Results of the soil samples show that the pH values were found to be 6.52 to 7.85 and Electrical Conductivity values were ranging between 75.62 – 165 µmhos/cm. Soils are generally Silt Loam. Organic matter values were ranging between 0.62 – 1.33 %. Total Nitrogen values were ranging between 230 – 642 mg/kg. Phosphorus values were ranging between 0.94 – 2.31µg/g. Potassium values were ranging between 520 – 895 mg/kg. Sodium values were ranging between 350 – 778 mg/kg. Total Sulphate values were observed to be BDL. The soil quality data for the 6 samples collected and analyzed are provided in Table no – 3.13.

3.3.5 BIOLOGICAL ENVIRONMENT

Study of the biological environment of any area comprises of well-planned ecological survey for the floristic and faunal composition of the areas through various scientifically planned techniques. Accordingly, the ecological survey for the proposed Rough stone quarry area including core and buffer zone were carried out to identify various species occurring in the area.

Flora in the study area

Field survey is done. For measuring the extent of flora present in the study area, the area is divided in to 4 quadrants. The flora population in each quadrant is summed up for the total population in the study area. Also, data from the State Forest department is used.

An ecological survey of the study area was conducted with reference to listing of species and assessment of the existing baseline ecological (Terrestrial) conditions. The objective of the survey is as follows:

- Generate existing data from field observations of various terrestrial floristic occurrences.
- Collect secondary data from Government records as well as through discussion with Forest officials, knowledgeable public etc.,
- Compare the data with authentic past records to identify changes, if any.
- Identify the impact of project operations on the biological aspects.

To accomplish the above objectives, a general ecological survey covering an area of 10 km radius was conducted. The locations were identified for phyto-sociological aspects to assess the current status.

Methodology

Sampling locations were selected with reference to topography, land use, vegetation pattern, etc. In this study, quadrats of $10m \times 10$ m were laid down to assess trees and quadrats of $5m \times 5m$ were laid down for shrubs.

National Park/Sanctuary:

There are no Wildlife Sanctuary and National Park present near to 10km radius of mining lease area. The nearest Sanctuary is Kodaikanal Wildlife Sanctuary - 24.00 km (S).

Reserve Forest

There are no forest within 1 km radius of the project site. The forest in study area is given below.

Dalavaipattinam R.F. – 6.8km(N)

Core Zone

During the field visit, it is observed that there are no national parks / Sanctuaries / forests in the 10km buffer area. The study area is devoid of any major plantations.

Table 3.10 Flora in Core Zone				
S.No.	Scientific name	Vernacular/English name	Type of flora	
1	Calotropis gigantea	Erukku		
2	Cassia auriculata	Aavarai	Shrubs	
3	Achyranthes aspera	Nayuruvi		

Flora in 300 m radius zone

It contains a total of 13 species belonging to 12 families have been recorded from the buffer zone of 300 m radius. Trees 4 (30%), Shrubs 4 (30 %) Herbs 5 (40%) were identified.

Table- 3.11, Flora in 300 m radius

S.	Local Name	Scientific Name	Family Name	IUCN
No				Conservation
				Status
		Trees		
1	Kondrai	Cassia fistula	Caesalpiniaceae	Not Listed
2	Seetha	Annona squamosa	Annonaceae	Not Listed
3	Vembu	Azadirachta Indica	Meliaceae	Not Listed
4	Karuvelam	Vachellia Nilotica	Fabaceae	Not Listed
		Shrubs		
1	Erukku	Calotropis Gigantea	Apocynaceae	Not Listed
2	Chundai	Solanum torvum	Solanaceae	Not Listed
3	Thuthi	Abutilon Indicum	Meliaceae	Not Listed
4	Unnichedi	Lantana camara	Verbenaceae	Not Listed
		Herbs	-	
1	Kuppaimeni	Acalypha indica	Euphorbiaceae	Not Listed
2	Nelavembu	Andrographis paniculata	Acanthaceae	Not Listed
3	Kovakkai	Trichosanthes Dioica	Cucurbitaceae	Not Listed
4	Perandai	Cissus Quadrangularis	Vitaceae	Not Listed
5	Thumbai	Leucas Aspera	Lamiaceae	Not Listed

Buffer zone

Taxonomically a total of 77 species distributed among 45 families have been recorded from the buffer area. Based on habitat classification of the enumerated plants the majority of species were Trees 27 and Shrubs 18 followed by herbs (21), climbers 11. Details of flora with the scientific name were mentioned in Table No. 3.17.

Table 3.12 List of Flora

		e 3.12 List of Fior		T11000	
S.No	Species	Family	Common Name	IUCN	
	Trees				
1.	Acacia nilotica	Mimosaceae	Karuvelam	<u>LC</u>	
2.	Acacia planifrons	Mimosaceae	Kodaivelam	NA NA	
3.	Aegle marmelos	Rutaceae	Vilvam	NA	
4.	Annona squamosa	Annonaceae	Seetha	NA	
5.	Atalantiamonophylla	Rutaceae	Kaattunaragam	NA	
6.	Carica papaya	Caricaceae	Pappali	NA	
7.	Cassia fistula	Caesalpiniaceae	Kondrai	NA	
8.	Chamaecrista nigricans	Caesalpiniaceae			
9.	Citrus aurantifolia	Rutaceae	-	NA	
10.	Delonix regia	Caesalpiniaceae	MayilKondrai	NA	
11.	Dichrostachys cinerea	Mimosaceae	Vidathalamthazhai	NA	
12.	Euphorbia antiquorum	Euphorbiaceae	Sadura-kalli	NA	
13.	Ficus benghalensis	Moraceae	Aalamaram	NA	
14.	Ficus religiosa	Moraceae	Arasu	NA	
15.	Leucaena leucocephala	Mimosaceae	Soundil	NA	
16.	Melia azedarach	Meliaceae	Malaivaembu	NA	
17.	Morindapubescens	Rubiaceae	Manjanatti	NA	
18.	Nyctanthes arbor-tristis	Nyctanthaceae	Parijaatham	NA	
19.	Phyllanthus acidus	Euphorbiaceae	Aranelli	NA	
20.	Phyllanthus emblica	Euphorbiaceae	Nelli, Muzhunelli	NA	
21.	Pithecellobium dulce	Mimosaceae	Kodukkaaipuli	NA	
22.	Pongamia pinnata	Fabaceae	Punga maram	NA	
23.	Prosopis juliflora	Mimosaceae	Velikkaathaan	NA	
24.	Psidium guajava	Myrtaceae	Koyya	NA	
25.	Senna occidentalis	Caesalpiniaceae	Peiyavarai	NA	
26.	Tamarindus indica	Caesalpiniaceae	Puliyamaram	NA	
27.	Tectona grandis	Verbenaceae	Thekku	NA	
		Shrub			
1.	Tecoma stans	Bignoniaceae	Sornapatti	NA	
2.	Solanum torvum	Solanaceae	Chundai	NA	
3.	Senna auriculata	Caesalpiniaceae	Avaram	NA	
4.	Ricinus communis	Euphorbiaceae	Amanakku	NA	
5.	Punica granatum	Punicaceae	Madhulai	NA	
6.	Polygala javana	Polygalaceae		NA	
7.	Phyllanthus reticulatus	Euphorbiaceae	Inkipazham	NA	
8.	Ocimumgratissimum	Labiatae	Elumichanthulasi	NA	
9.	Ocimumtenuiflorum	Labiatae	Thulasi	NA	
10.	Nerium oleander	Apocynaceae	Karaviram, Sevvarali	NA	
11	Lantana camara	Verbenaceae	Unnichedi	NA	
12.	Justicia adhatoda	Acanthaceae	Adathodai	NA	
13	Jatropha curcas	Euphorbiaceae	Kaatu-amanakku	NA	
14	Abrusprecatorius	Fabaceae	Kundumani	NA	
15	Abutilon indicum	Malvaceae	Perun thuthi	NA	

16	Agave americana	Agavaceae	Kathazhai	NA
17	Calotropisgigantea	Asclepiadaceae	Erukku, Arkkam	NA
18	Cissus quadrangularis	Vitaceae	Pirandai	NA
		Herb		
1.	Acalypha indica	Euphorbiaceae	Kuppaimeni	NA
2.	Achyranthes aspera	Amaranthaceae	Nayurivi	NA
3.	Ageratum conyzoides	Compositae	Poompillu	NA
4.	Alternanthera sessilis	Amaranthaceae	Ponnanganni	NA
5.	Andrographis paniculata	Acanthaceae	Nelavembu	NA
6.	Arachis hypogaea	Fabaceae	Verkadalai	NA
7.	Argemone Mexicana	Papaveraceae	BramanThandu	NA
8.	Aristolochiabracteolata	Aristolochiaceae	Aduthinnappalai	NA
9.	Blumealacera	Compositae	Navakkarandai	NA
10.	Boerhaviadiffusa	Nyctaginaceae	Mookarattai	NA
11.	Boerhaviaerecta	Nyctaginaceae	Seemaimookarattai	NA
12.	Celosia argentea	Amaranthaceae	Pannaikeerai	NA
13.	Centella asiatica	Apiaceae	Vallarai	NA
14.	Cleome viscosa	Capparidaceae	Naikadugu	NA
15	Croton bonplandianum	Euphorbiaceae	Rail poondu	NA
16	Hygrophilaschulli	Acanthaceae	Neermulli	NA
17	Leucas aspera	Labiatae	Thumbai	NA
18	Opuntia stricta	Cactaceae	Chappathikkalli	NA
19	Phyllanthus amarus	Euphorbiaceae	Kizha-nelli	NA
20	Scoparia dulcis	Scrophulariaceae	Sarakkotthini	NA
21	Solanum melongena	Solanaceae	Kathiri	NA
		Climber		
1.	Asparagus racemosus	Asparagaceae	Sadhavaeri	NA
2.	Capparis roxburghii	Capparidaceae	-	NA
3.	Coccinia grandis	Cucurbitaceae	Kovai	NA
4.	Cocculushirsutus	Menispermaceae	Kattukodi	NA
5.	Cucumis sativus	Cucurbitaceae	Vellarikkaai	NA
6.	Lagenaria siceraria	Cucurbitaceae	Surakkaai	NA
7.	Passiflora foetida	Passifloraceae	Siruppoonaikkaali	NA
8.	Rhynchosiaviscosa	Fabaceae	-	NA
9.	Riveahypocrateriformis	Convolvulaceae	Boodhikeerai	NA
10	Solanum trilobatum	Solanaceae	Thoodhuvalai	NA
11	Tinospora cordifolia	Menispermaceae	Seendhil	NA

Fauna in the study area

A total of 34 species belonging were recorded in the buffer zone. Based on habitat classification the majority of species were 15 Birds, followed by 7 Insects, 4 Reptiles, 5 Mammals and 3 Amphibians. There are two schedule II species, 31 schedule IV species and one Schedule V species according to Indian wild life Act 1972. There are no critically endangered, vulnerable and endemic species observed. List of fauna in the buffer zone is mentioned in Table 3.18.

Table 3.13 List of Fauna

S.No.	Scientific Name	Common Name	Conservation status as per Indian Wildlife Protection Act (1972)
		Avifauna	
1	Ardeola grayii	Pond heron/ Paddy Bird	Sch-IV
2	Ploceus philippinus	Weaver bird	Sch-IV
3	Tachybaptus ruficollis	Little Grebe	Sch-IV
4	Corvus splendens	House crow	Sch-V
5	Acridotheres tristis	Common myna	Sch-IV
6	Dicrurus macrocerus	Black drongo	Sch-IV
7	Quills contronix	Grey quail	Sch-IV
8	Apus affinis	House swift	Sch-IV
9	Columba livia	Blue Rock pigeon	Sch-V
10	Streptopelia chinensis	Spotted Dove	Sch-IV
11	Passer domesticus	House Sparrow	Sch-IV
12	Egretta garzetta	Little egret	Sch-IV
13	Himantopus Himantopus	Black Winged Stilt	Sch-IV
14	Ceryule rudis	Lesser Pied Kingfisher	Sch-IV
		Reptiles	
1	Naja naja	India cobra	Sch-II
2	Calotes versicolor	Common garden lizard	Sch-IV
3	Bangarus caerleus	Krait	Sch-IV
4	Ptyas mucosus	Rat snake	Sch-II
		Amphibians	1
1	Rana hexadactyla	Frog	Sch-IV
2	Rana tigrine	Bull frog	Sch-IV
3	Bufo melanosticus	Common Indian toad	Sch-IV
	,	Mammals	
1	Rattus sp	Rat	Sch-V
2	Lepus nigricollis	Indian Hare	Sch-IV
3	Funambulus palmarum	Indian Palm squirrel	Sch-IV
4	Rattus norvegicus	Field mouse	Sch-IV
5	Rusty spotted Cat	Felis rubiginosa	Sch-IV
	,	Insects	
1	Danainae	Milkweed butterfly	NL
2	Apis cerana	Indian honey bee	Sch-IV
3	Ceratogomphus pictus	Dragonfly	Sch-IV
4	Hieroglyphus sp	Grasshopper	NL NL
5	Danaus chrysippus	Tawny coster	Sch-IV
6	Sympetrum fonscolombii	Red-veined darter	NL NL
7	Tirumala limniace	Blue tiger	Sch-IV

3.3.6 Land Environment

The main objective of this section is to provide a baseline status of the study area covering 10km radius around the project periphery; so that temporal changes due to the mining activities on the surroundings can be assessed in future.

Land use Pattern of the Project Area

The present and the post mining land use pattern is shown below.

Description	Present Area in Ha.	Area at the end of life of Quarry in Ha.
Quarrying Pit	00.55.50	12.73.00
Infrastructure	Nil	0.02.00
Roads	Nil	0.04.00
Safety Zone / Green Belt	Nil	1.61.00
Unutilized	13.84.50	Nil
Total	14.40.00	14.40.00

Table 3.14 Land use pattern of the project site

- At the end of life of mine, the excavated mine pit / void of 12.73.00 Ha. will act as artificial reservoir for collecting rain water and helps to meet out the demand or crises during drought season.
- After mine closure the greenbelt (1.61.00 Ha.) will be developed along the safety barrier and top benches and 0.06 ha are approach road and Infrastructure.


Land use pattern of the study area

A visual interpretation technique has been adopted for land use classification based on the keys suggested in the chapter – V of the guidelines issued by NNRMS Bangalore & Level III classification with 1:50,000 scale for the preparation of land use mapping. Land use pattern of the area was studied through LISS III imagery of Bhuvan (ISRO). The 10 km radius map of study area was taken for analysis of Land use cover. The land use map of the study area is given in Figure 3.14.

Table 3.15 Land use pattern of the Study area of 10 km radius

SI.No.	LAND USE / LAND COVER	Area in Sq.Km	Area in Percentage
1	Built-up land	5.93	1.79
3	Crop land	160.23	48.24
4	Existing mining area	2.05	0.62
5	Fallow land	4.51	1.36
6	Land with scrub	3.13	0.94
7	Land without scrub	98.72	29.72
	Plantation	50.16	15.10
8	Water bodies	7.43	2.24
	Total Area	332.16	100.00

Source: Survey of India Toposheet and Landsat Satellite Imagery
From above table it is inferred that the majority of the land in the study area is
Crop Land (48.24 %) followed by Land without scrub (29.72 %).

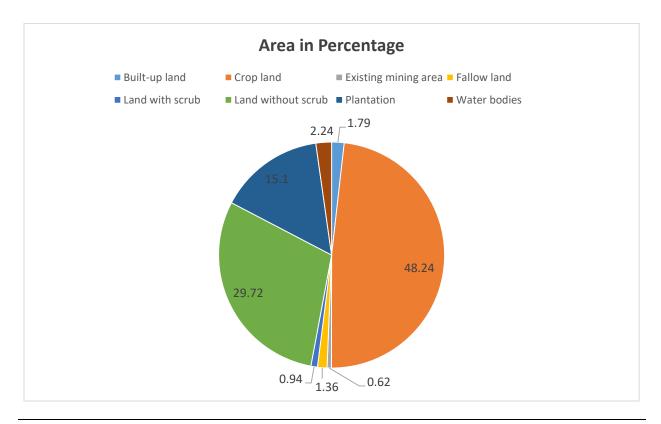

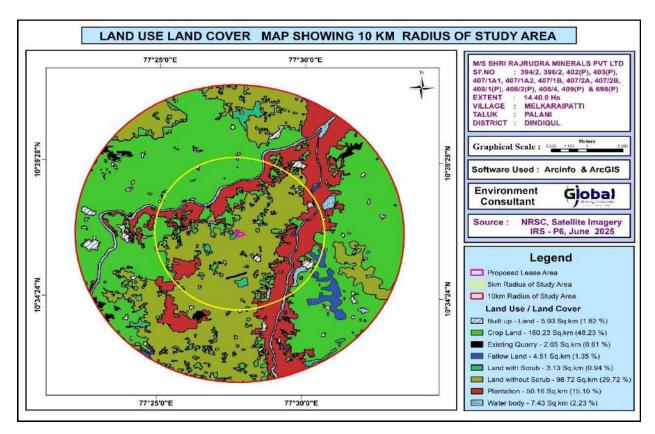


FIG 3.14 LAND USE/LAND COVER MAP OF THE STUDY AREA

3.3.7 SOCIOECONOMIC ENVIRONMENT

The socio-economic environment of the study area is studied by conducting primary sites through site visits and conducting sample surveys. The secondary data obtained from Census 2011 is also used. The following data area collected from secondary data:

- Demographic pattern.
- Health pattern
- Occupational structure.

3.11.1 DETAILS OF VILLAGES

The profile of the villages located in the study area is given in Fig 3.19 below.

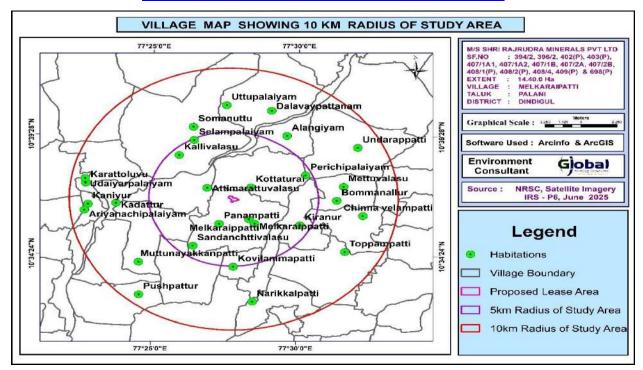


FIG 3.15 VILLAGE MAP OF THE STUDY AREA

DETAILS OF VILLAGES

The project is located in Melkaraipatti Village, Palani Taluk, Dindigul District. There are 23 villages in the study area. Village map is given in Figure 3.xx and the population profile of the study area are detailed below.

Table 3.16 - Population profile of the study area

Population profile of the study area			
Particulars	No of Population	Percentage (%)	
A. Po	pulation break-up by Gende	er	
Male Population	94219	50.03	
Female Population	94097	49.97	
Total	188316	100	
B. Pe	opulation break-up by Caste		
Scheduled Caste	42010	22.31	
Scheduled Tribes	180	0.09	
Others	146126	77.60	
Total	188316	100	

C. Literacy Level			
Total Literate Population	120556	64.07	
Total Illiterate Population	67760	35.93	
Total	188316	100	
D. Occupational structure			
Main workers	99894	53.04	
Marginal workers	11977	6.36	
Total Workers	111871	59.40	
Total Non-workers	76445	40.60	
Total	188316	100	

The above table shows that the male and female population ratio are almost equal. Among the total population 0.09 % belong to Scheduled Tribes, 22.31 % are Scheduled Caste and the balance 77.60 % people belong to other castes. Among the total population, 64.07 % of the people are literate. The results are plotted in figures below.

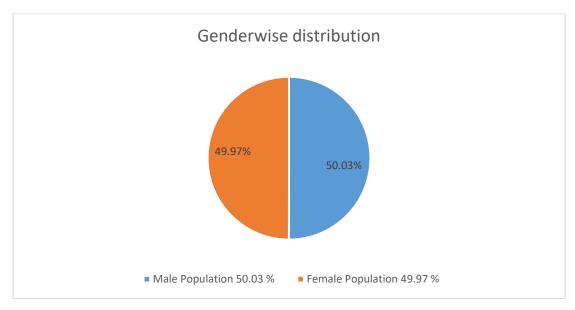


FIG 3.16 GENDER-WISE POPULATION DISTRIBUTION

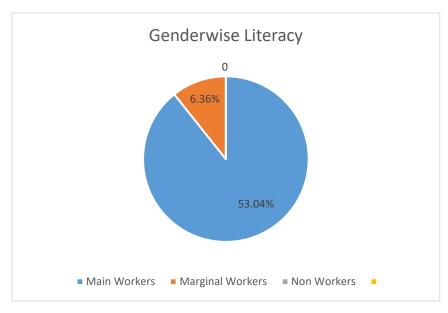


FIG 3.17 GENDER WISE LITERACY DISTRIBUTION

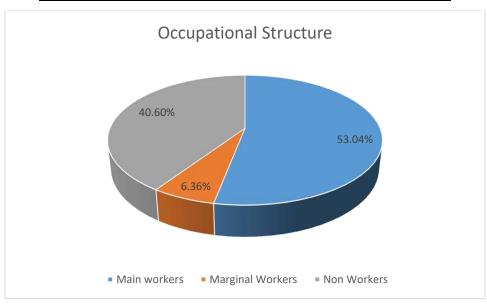


FIG 3.18 OCCUPATIONAL STRUCTURE WITHIN BUFFER ZONE

Population profile - Melkaraipatty			
Particulars	No of Population	Percentage (%)	
A. Pop	oulation break-up by Gend	er	
Male Population	1700	49.60	
Female Population	1727	50.40	
Total	3427	100	
B. Po	pulation break-up by Cast	е	
Scheduled Caste	850	24.80	
Scheduled Tribes	0	0	
Others	2577	75.20	
Total	3427	100	
	C. Literacy Level		
Total Literate Population	2309	67.37	
Total Illiterate Population	1118	32.63	
Total	3427	100	
D	. Occupational structure		
Main workers	1970	57.48	
Marginal workers	93	2.71	
Total Workers	2063	60.20	
Total Non-workers	1364	39.80	
Total	3427	100	

Sample Survey

The expert visited 6 villages in the study area namely Panampatty, Kottathurai, Melkaraipatty, Keeranur, Rajampatti and Bommanallur Villages. Discussions were held with the people from nearby locality to study the social and economic conditions prevailing in the area. The expert also visited nearby hospitals and primary health centres.

3.3.8 HYDROGEOLOGY OF THE STUDY AREA

In Dindugal District, during the pre monsoon, the water level generally in declining trend ranges from G.L. to 15m. The depth of well below Ground Level 12.0m are become dry during hot season like May, June, July. In the post monsoon, the water level generally in upward trend due to rainfall and it may reach the Ground Level also. Dindugul district is almost made up of hard rock covered by thin soil.

Hard rock:

More than 97% of the district is covered by hard rocks. The gneissic rock type is the country rock seen commonly.

Charnockiterock occurs in Kodaikkanal hills and in parts of Nilakottai and Nattamtaluks. Calc Gneisses are seen in parts of Oddanchatram, Gujiliyamparai, Vedasandhur and Reddiarchatram blocks. Quartzites are seen in patches in Vadamadurai, Sanarpatti and in Oddanchatram blocks.

Valley-fill sediments admixed with sand, silt and clay are found in parts of Nattam and Sanarpatti blocks. They are the transported weathered rocks from the adjoining hill slopes.

Topography

The area applied for quarry lease is exhibits almost plain covered by gravel formation. The massive Charnockite formation is noticed below 2m Gravel formation and sloping towards southeastern side of the area, the altitude of the area is above 316m (maximum) from MSL.

Drainage pattern of the Area

The following water bodies are located in the study area.

Odai – 80m (E), Tank – 700m(NE), 949m (NW), 1.5Km (SE), 1.6Km (SE), Amaravathi River – 2.3 km (NW), Shanmukha River – 3.4 km (SE).

The drainage map of the study area is given in Figure 3.16.

GEOMORPHOLOGY

Predominantly the buffer zone is dominated by Shallow weathered buried Pediplain, and the lease area falls under the same category. Geomorphology of the study area is detailed below. The geomorphology of the study area is given in Figure 3.18.

Sl.No.	GEOMORPHOLOGY	Area in Sq.Km	Area in Percentage
1	Pediment – Inselberg Complex	2.09	0.63
2	Pediplain	128.26	38.61
3	Shallow weathered buried pediplain	201.25	60.59
4	Structural Hills	0.56	0.17
	Total Area	332.16	100.00

Geology

The regional geology of the study area is shown below in Figure 3.17. Predominantly the buffer zone is dominated by Hornblende biotite gneiss, and the lease area falls under the same category. The geology of the study area is detailed below.

SI.No.	GEOLOGY	Area in Sq.Km	Area in Percentage
1	Charnockite	2.51	0.75
2	Hornblende biotite gneiss	325.48	97.77
3	Pink Migmatite	1.96	0.59
4	Water Body	2.94	0.88
Total Area		332.89	100

Soil:

The Soil of the study area is shown below in Figure 3.17. Predominantly the buffer zone is dominated Sandy Clay Loam category, and the lease area falls under Loamy Sand category. The soil texture of the study area is detailed below.

Sl.No.	Soil Type	Area in Sq.Km	Area in Percentage
1	Loamy Sand	195.41	58.83
2	Sandy Clay Loam	25.49	7.67
3	Sandy Loam	111.26	33.50
Total Area		332.16	100

FIGURE 3. 19 10 KILOMETER RADIUS OF THE DRAINAGE MAP

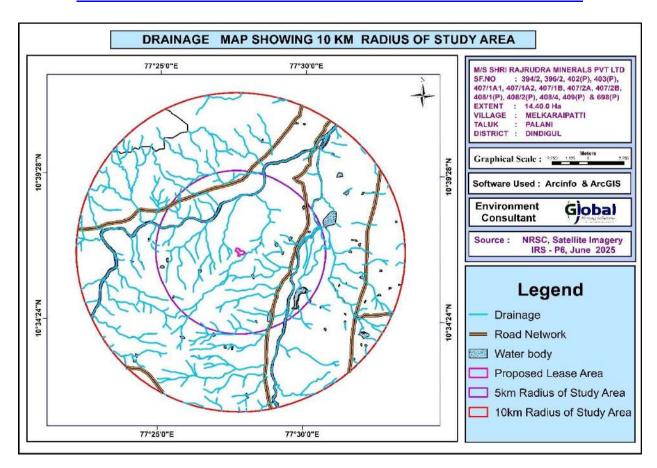


FIGURE 3. 20 10 KILOMETER RADIUS OF THE GEOLOGY MAP

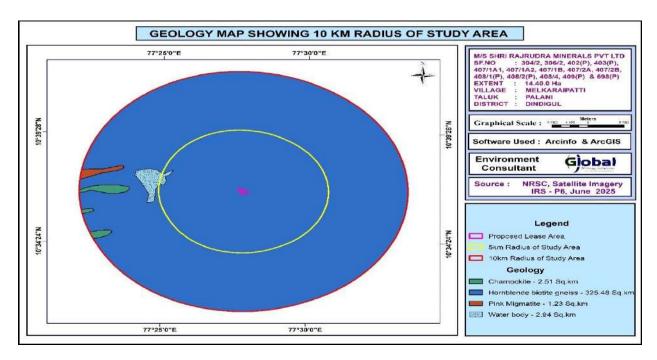


FIGURE 3. 21 10 KM RADIUS OF THE STUDY AREA GEOMORPHOLOGY MAP

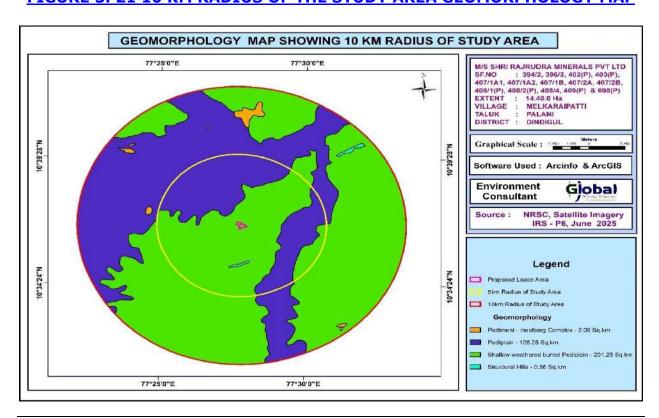


FIGURE 3.22 10 KM RADIUS OF THE STUDY AREA SOIL TYPE MAP


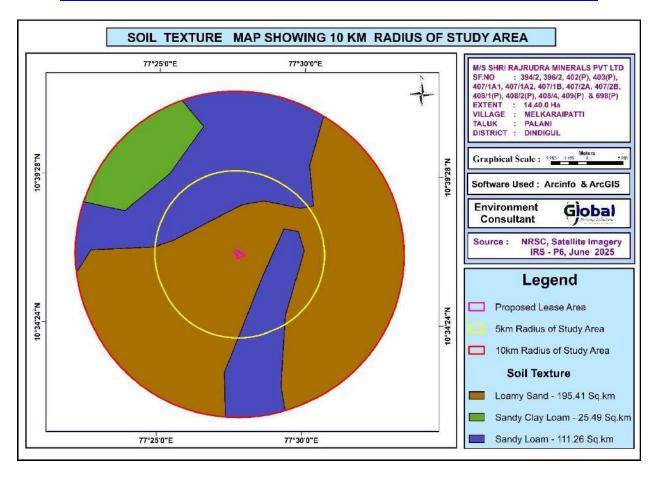


FIGURE 3.23 CONTOUR MAP OF THE STUDY AREA

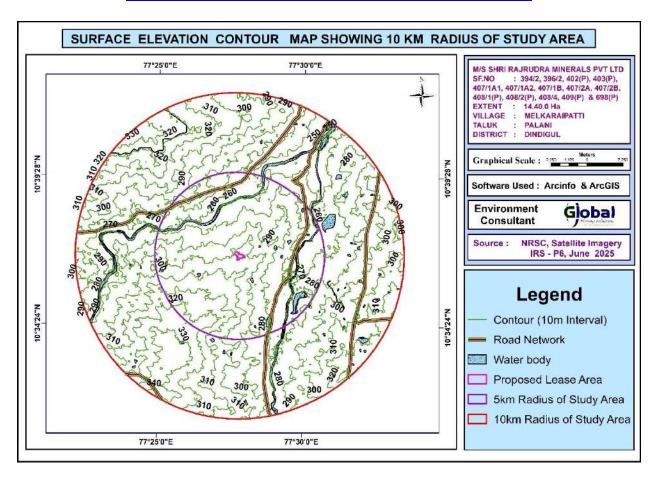

CHAPTER 4

ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

INTRODUCTION

This chapter deals with the various anticipated environmental impacts and mitigation measures of the proposed mining activity. The proposed method of mining is Opencast Mechanized and the quarry operation involves Shallow Jack Hammer Drilling, Blasting, Excavation, Formation of benches, Loading and Transportation of minerals. The above activities may affect the surrounding environment like removal of rock mass, Loss of flora and fauna of the area, surface water discharge, change in air and water quality, etc., If adequate measures are not taken for the proposed operations, it will cause the environmental degradation of the area and it will lead to affect to the ecosystem of the surrounding environment.

In order to maintain the existing environmental scenario of the proposed mine lease area it is mandatorily required to assess the present ecology and environment of the proposed mine lease area and buffer area of the project before starting mining operations. The various environmental impacts which are identified by the proposed quarrying activities have been discussed below and its subsequent paragraphs.

- ❖ Land Environment
- ❖ Soil Environment
- Water Environment
- Air Environment
- ❖ Noise Environment
- ❖ Biological Environment
- Socio Economic Environment

4.1 <u>DETAILS OF INVESTIGATED ENVIRONMENTAL IMPACTS DUE TO PROJECT LOCATION POSSIBLE ACCIDENTS, PROJECT DESIGN, PROJECT CONSTRUCTION, REGULAR OPERATIONS FINAL DECOMMISSIONING OR REHABILITATION OF A COMPLETE PROJECT.</u>

This is a proposed Rough Stone and Gravel Quarry in S.F.No. 394/2, 396/2, 402(P), 403(P), 407/1A1, 407/1A2, 407/1B, 407/2A, 407/2B, 408/1(P), 408/2(P), 408/4, 409(P) and 698(P) over an extent of 14.40.00 Ha in Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State. The method of mining is Opencast mechanized with a bench width and height of 5m. It is proposed to excavate to 57,26,860 m³ of Rough Stone and 2,15,410 m³ Gravel for the period of 5 years with ultimate depth up to 82m BGL. There is no stream/odai within the mine lease area.

The main anticipated impact on the Land Environment due to quarrying operation is change in Landscape, change in Land – use Pattern.

The entire mine lease area is Patta Land. The total project area is 14.40.00 Ha. It is proposed to be altered by effective quarrying operation such as excavation (12.73.00 Ha), Infrastructure (0.02.0), Road (0.04.0 Ha) and green belt will be developed in the safety zone of 1.61.00 Ha. The ultimate depth of quarrying is proposed with maximum depth of 82 m BGL and will not intersect the ground water table.

4.2 MEASURES FOR MINIMIZING AND /OR OFFSETTING ADVERSE IMPACTS IDENTIFIED

Aspect	Impact		
Topography	The area is Plain topography covered by		
	rough stone and Gravel formation.		
	Quarrying activity will lead to change in		
	geological setting of the area i.e., Due to the		
	quarrying activity in the mine lease area will		
	leads to affect the aesthetic view on the		
	environment. Further, due to the movement of heavy vehicles in and around the mine lease area will leads to affect the surrounding		
	agricultural lands, ecology and biodiversity,		
	human habitations due to the emissions from		
	vehicles like SO ₂ , NO _x , PM ₁₀ , PM _{2.5} , etc., The		
	existing land use pattern is given as under.		
	Avon in uco		

Land Use	Present Area (Hect)	Area in use during the quarrying period (Hect)
Quarrying Pit	00.55.50	12.73.00
Infrastructure	Nil	0.02.00
Roads	Nil	0.04.00
Green Belt	Nil	1.61.00
Unutilized	13.84.50	Nil
Total	14.40.00	14.40.00

The major impact due to this project on land environment is the change in land use. Mining activity will be carried out upto a depth of 82 m below ground level. At the end of mining period, the quarried pit will act as a water reservoir to store the rain water.

Mitigation measures

Land Use at the end of mine will be as follows.

Land Use	Area in use during the quarrying period (Hect)
Area left for water body	12.73.00
Green Belt	1.61.00
Remaining area	0.06.00
Total	14.40.00

At the mine closure stage 12.73.00 Ha of lease area will be left as rain water harvesting pond and 1.61.00 Ha will be developed with green belt.

Greenbelt shall be developed around the mine lease area and the details has been given below.

The ultimate pit dimension of the mine lease area is given below.

Ultim	Ultimate Pit dimension at the end of Mining plan Period				
Pit No.	Length (max) (m)	Width (Avg) (m)	Depth (max) (m)		
I	656	194	82 m BGL		

If mining is not done systematically it will leads to the dumping failure in the mining area.

Year	Species	No. of trees	Spacing	Survival
I	Pungai,	1610		
II	Vagai,	-		
III	Vembu,	-		
IV	Manjal	-	3m x 3m	85%
V	konrai,	-	JIII X JIII	03 /0
	Naval,			
	Puvarasu,			
	etc			
T	otal	1610		

Due to the thick vegetation around the mine lease area and sprinkling of water around the haul roads the dust emissions arise from the vehicles will be controlled.

At the end of mining period, fencing will be provided around the mine lease area to arrest the entry of public/cattle to the mining area.

The rough stone are proposed to quarry 5m bench height and 5m width with 45° slope and with conventional opencast Mechanized method. As per the approved mining plan a safety distance of 7.5m shall be provided. There is no overburden anticipated during the entire Rough Stone quarrying operation. The excavated rough stone will be directly loaded into tipper to the needy crusher/other buyers.

Drainage	Mine drainage is surface water or groundwater that drains from an active or abandoned mine. One of the adverse impact of mine drainage is it will contaminate the ground water.	As per the approved mining plan the ultimate pit limit is 82 m (BGL). The ground water table is reported as 93 m. In the proposed mining plan only 82 m Below ground level has been envisaged as workable depth for safe & economic quarrying for the entire lease period. Hence the quarrying operation may not affect the ground water.
Soil Quality	In monsoon seasons due to the excavation of	It is proposed to quarry upto a depth of 82 m below
and	minerals soil erosion and sediment deposition	ground level and the nearby water table is 93 m. So, the
Agriculture	will occur in the nearby water bodies.	mining activity will not affect the ground water. To
		prevent the soil erosion during monsoon season, garland
		drain will be constructed with silt traps.
Visual	Quarrying activities and rock extraction	The reclamation of the post mined quarry surface is
impact on	generally cause several environmental effects	aimed at restoring the ecological balance taking into
surrounding	on the surrounding areas. The alteration of	account geological parameters but also local flora and
environment	landscape due to activities like excavation,	climate. Further the ultimate depth of mining is 82 m bgl.
	drilling or blasting, in particular, often	In the post mining stage, the quarried out pit will be
	generates a visual impact on the receptors	used for rainwater harvesting.
	set in the surroundings. Among these	
	effects, the shape, extent, or chromatic	
	contrast of the mining surface with the	
	original land form may represent a huge loss	
	of appeal for the growth of new urban	
	settlements.	

4.2.1 SOLID WASTE GENERATION AND MANAGEMENT

The plastic waste generation is very negligible and it will be collected from the source level in specific dustbin and disposed through the municipal bins.

- Identification of solid waste generations
- Providing dustbins to collect with different color coding
- Creating awareness among the employees
- Developing common storage yards
- Disposal to the nearby municipal yards
- Record keeping
- Review once in quarter

4.2.2 Soil Environment

Anticipated Impact

Mining activities often disrupt the existing environment as they involve disturbing the untouched earth materials. There is no overburden/ waste generation from this project. the surface consists of Gravel formation followed by Rough stone which is proposed to excavate completely during the quarrying operation. Erosion of Gravel extracted fine material can result in substantial sediment loading to surface waters and drainage ways. During rainy season surface run off may cause sedimentation in low lying areas.

Mitigation Measures for Soil Erosion and Soil Conservation

- Runoff water will be collected in bottom of the quarry and used for plantation and dust suppression during dry season.no run off water will be discharged beyond lease area.
- Wet drilling and haul road water sprinkling will be carried out to minimise air born dust at source level, which may cause soil pollution due to sedimentation.

- Garland drains will be constructed around the project area with silt traps to control the soil erosion during rainy seasons.
- Greenbelt development (1.61.00 Ha.) all along the periphery of the project area (i.e., 7.5 m safety barrier) will ensure binding strength and minimizes soil erosion.
- Soil sampling will be carried out in the core zone for every season to ensure the soil quality is not affected due to the quarrying activities.
- Monitoring and maintenance Weekly monitoring and daily maintenance of erosion control systems so that they perform as specified specially during rainy season.

4.2.2 WATER ENVIRONMENT

Impact on Surface Water Resources

There is no seasonal or perennial Odai within the M.L area. The drainage pattern of the region is plane to sub-dendritic. Surface run-off water of the M.L. area is drained through proposed drainage and collected in the bottom of the quarry and collected water will be used for same quarry operation as such for plantation & dust suppression.

The following water bodies are located in the study area.

Odai – 80m (E), Tank – 700m(NE), 949m (NW), 1.5Km (SE), 1.6Km (SE), Amaravathi River – 2.3 km (NW), Shanmukha River – 3.4 km (SE)

Since these water bodies are located outside the lease area and there is no discharge of effluent or any untreated water from the mines will be made into these water bodies, there is no major impact. The project proponent will restrict the mining operation only within the lease and no other work will be carried out near the canal or any area outside the mining lease.

Impact due to Water use in Mines

In the proposed mines water will be mainly used for domestic purpose, dust suppression & plantation. Total water requirement for the project is 9.0 KLD which will be sourced from outside agencies. Negligible sewage of 1.8 KLD will be generated, for which a septic tank with soak pit will be set up. The water balance diagram is given below.

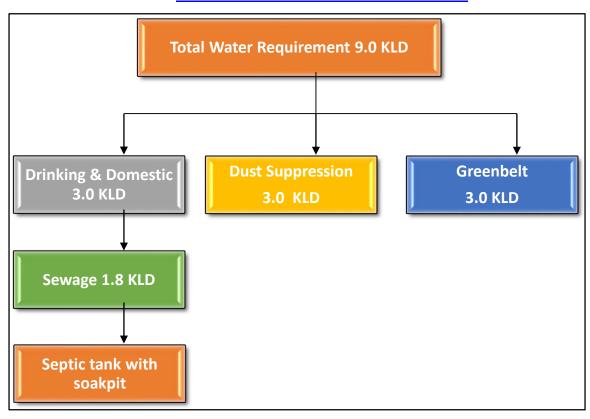


FIG 4.1 WATER BALANCE DIAGRAM

Impact on Ground Water

The mining activity is not likely to intersect ground water as the ground water table occurs at a depth of 93 m. The mining will go up to the maximum depth of 82 m BGL. So, there will be no chance of intersecting the ground water table by the mining activity. So, the impact of mining on the ground water is not envisaged.

Mitigation measures

- Entire lease area will be provided with proper garland drains.
- > Check wears will be provided to prevent solids from wash off.
- Construction of garland drains around freshly excavated so that flow of water with loose material is prevented.
- The mine water will be passed through the natural slopes and valleys and gets accumulated in the settling tank (Bottom pit)

Ground water environment in buffer zone

The scenario of ground water in Dindigul District, Palani Talukis given below.

	TABLE 4.1 Ground Water Level Status in Dindigul District						
S. No.	Assess ment Unit (Firka)	Net Annual Ground water availabil ity	Existin g gross ground water consum ption for irrigati on	Existing gross ground water consumption for domestic and industrial water supply	Existin g gross ground water consum ption for all uses	Stage of ground water developm ent	Category
1	Palani	2,179.58	985.6	106.28	1091.88	50	SAFE

Source: nwm.gov.in

It is planned to carryout appropriate rainwater harvesting schemes and artificial recharge schemes in the area.

Rainwater Harvesting Plan

Since the lease proximate areas are with less water potential and the rainwater is the major source for replenishment of ground water, effective rainwater harvesting and other water augmentation measures are proposed in this project.

- Development of garland drain around the guarry connected to settling tank.
- Cleaning of drain periodically to prevent siltation

- The supernatant clear water from the settling pond will drain into the nearby channel on the eastern side of the lease.
- Utilizing the rainwater harvested in the mine pit to meet the water requirement of the project.

The average annual rainfall of the area is 812 mm. Taking into consideration of 0.35 as runoff co-efficient for mining area, the total quantity of rain water can be harvested per annum from the area has been tabulated as below.

Table 4.2 - Rainwater Harvesting Plan

S.NO	Rainwater	Area in Sq.m	Average	Volume of harvestable
	Harvesting		annual rainfall	quantity (Cum) of rain water
	Area			per annum
1	Total Mine	144000	0.8	40320
	Lease Area			
Total Harvested Rainfall			40320	

Total surface water runoff is 40320 Cum per Annum. 10% of this amount will be evaporated and rest 36288 m³ will be recharged in the rain water harvesting pit.

Six sumps will be proposed to harvest rain water and each sump capacity will be 6000 Cu.m. The rain water stored in the pond will be utilized for plantation, dust suppression activities. The capacity of Rain water harvesting post will be sufficient to arrest the surface runoff from the lease area considering the highest amount of rain fall.

4.2.3 **VEGETATIONVEGETATION IN THE CORE ZONE**

The mine lease area is devoid of major plantation. Shrubs and bushes are majorly found within the lease area. The proponent has planned to develop green belt in an area of 1.61.00 Ha. Trees like Pongamia pinnata, Syzigium cumini, Albizia lebbeck, Thespesia populnea, Bauhinia racemose, Cassia siamea, Azadirachta indiaca will be planted around the mine lease area. A total of 1610 trees are planned to be planted. Spacing will be $3m \times 3m$.

FAUNA

There are no sanctuaries/national parks in the buffer zone of 10km study area. The commonly found fauna in the buffer zone are given in Chapter 3. During mining activity the impacts and mitigation measures for Fauna are given in below table.

	Table 4.3 Impacts and mitigation measures for Fauna				
S.No.	Impact	Mitigation measure			
1	Fauna is affected due to noise and vibration.	Sirens will be blown before blasting in the mines. To reduce noise levels, plantation will be done. Blasting will be carried out only in the allotted time.			
2	Dust generation due to mining activities	To reduce dust generation, mist sprayers will be used. During transportation, the material will be covered with tarpaulin. Water sprinkling will be done to reduce generation of pollutants.			
3	Change in land use of the lease area	After the mine closure stage, the mine pit will be left as rain water collecting tank, which can attract bird population in the nearby areas.			
4	Accidental falling of animals	To prevent entry of animals, the mine lease surrounding area will be properly fenced with barbed wire.			

4.3 <u>IRREVERSIBLE AND IRRETRIEVABLE COMMITMENTS OF</u> ENVIRONMENTAL COMPONENTS.

4.3.1 IMPACT DUE TO MINING OPERATION

Impact prediction is a very important phenomenon in evaluating the environmentally potential adverse impacts for any proposed mine project. The impact prediction is always carried out under worst possible conditions so as to mitigate or to eliminate the environmental hazards. These predictions thus calculated are superimposed over the baseline data to calculate the net impact on the environment after the proposed mine Project comes into production.

4.3.2 IMPACT ON AIR ENVIRONMENT

The impacts on air environment from a mining activity depend on various factors like production capacity, machinery involved, operations and maintenance of various equipments and vehicle. Apart from these, there will be other activities associated viz transportation of mineral and waste, stocking facilities and dump management within the mine lease area that may contribute to pollution.

4.3.3 Quantitative Estimation of Impacts on Air Environment

An attempt has been made to predict the incremental rise of various ground level concentrations above the baseline status in respect of air pollution due to proposed is 57,26,860 m3 of Rough Stone and 2,15,410 m3 Gravel for the period of 5 years with ultimate depth up to 82m BGL.

The pollutants released into the atmosphere will disperse in the down wind direction and finally reach the ground at farther distance from the source. The concentration of ground level concentrations mainly depends upon the strength of the emission source and micrometeorology of the study area.

In order to estimate the ground level concentrations due to the emission from the proposed project, EPA approved Industrial Source Complex ISC AERMOD View Model has been employed.

The mathematical model used for predictions on air quality impact in the present study is ISC-AERMOD View-6.8.6. It is the next generation air dispersion model, which incorporates planetary boundary layer concepts.

The AERMOD is actually a modeling system with three separate components:

AERMOD (AERMIC Dispersion Model), AERMAP (AERMOD Terrain Preprocessor) and AERMET (AERMOD Meteorological Preprocessor).

Special features of AERMOD include its ability to treat the vertical in homogeneity of the planetary boundary layer special treatment of surface releases, irregularly shaped area sources, a plume model for the convective boundary layer, limitation of vertical mixing in the stable boundary layer, and fixing the reflecting surface at the stack base.

The AERMET is the meteorological preprocessor for the AERMOD. Input data can come from hourly cloud cover observations, surface meteorological observations and twice-a-day upper air soundings. Output includes surface meteorological observations and parameters and vertical profiles of several atmospheric parameters.

The AERMAP is a terrain preprocessor designed to simplify and standardize the input of terrain data for the AERMOD. Input data include receptor terrain elevation data. Output includes, for each receptor, location and height scale, which are elevations used for the computation of airflow around hills.

Salient features of the AERMOD model are given hereunder:

- Excavation operations are considered as area sources.
- Transportation of material on haulage roads has been considered as line source

The predicted ground level concentrations for study period computed using AERMOD model are plotted as isopleths.

4.3.4 Sources of Dust Emission

The proposed mining is carried out by mechanized opencast method. The air borne particulate matter generated by ore handling operations, transportation and screening of ore is the main air pollutant. The emissions of sulphur dioxide (SO_2) , Oxides of Nitrogen (NOx) contributed by diesel operated excavation/loading equipment and vehicles plying on haul roads are marginal. Prediction of impacts on air environment has been carried out taking into consideration proposed production and net increase in emissions. Based on the various operations involved in the production of minerals, the various emission sources has been identified as given below.

- a. Area sources.
- b. Line sources.

Extraction of mineral from mine, are considered as area sources. Transportation of material from mining benches to various end points are considered as line sources. The impact of above sources on air environment is discussed below:

The other sources of air pollution are the dust generated during the movement of tippers on the haul road. Water tankers with spraying arrangement will be used for regular water sprinkling on the haul roads to ensure effective dust suppression. The tippers are well maintained so that exhaust smoke does not contribute abnormal values of noxious gases and un-burnt hydrocarbons.

4.3.5 Emission Details

All the emissions discussed above are quantified for proposed maximum production of is 57,26,860 m3 of Rough Stone and 2,15,410 m3 Gravel for the period of 5 years with ultimate depth up to 82m BGL by the open-cast mechanised mining method. The existing air quality levels are covered in the baseline scenario. Excavation, loading and transportation through tippers are the major sources, which are of significance. Therefore, the emissions considered for modeling are from drilling blasting, excavation & transportation rough stone.

The emissions are computed based on AP-42 emission factors. Operational hours, activity rate, wind speed and moisture content have been considered for estimation of emissions from point and area sources. For line source, apart from operational hours, activity rate, moisture, silt content and vehicle weight have been considered. Predictions are carried out for the worst-case scenario of simultaneous operation of excavators (area sources) and tippers for transportation from mine pit to loading pit (line sources) over a distance of 500 m.

The number of working days has been taken at 300 days per year with 8 hours of operation/day, hence the concentrations predicted are considered to be the worst case. With control measures, the emissions have been taken at 30% of uncontrolled emissions for handling and 10% of uncontrolled emissions for transportation.

4.3.6 Meteorological Data

The meteorological data recorded continuously during the month of March 2025 – May 2025 on hourly basis on wind speed, wind direction and temperature has been processed to extract the 24- hourly mean meteorological data as per the guidelines of IMD and MoEF for application of AERMOD model. Stability classes computed for the mean hours is based on guidelines issued by CPCB on modeling. Mixing heights representative of the region have been taken from the available published literature.

4.3.7 Summary of Predicted Ground Level Concentrations

Ground level concentrations due to the mining activities have been estimated to know the incremental raise and extent of impact in the study area.

The maximum ground level concentration is estimated to be about 2.66 μ g/m³ of PM 2.5 & 4.41 μ g/m³ of PM10 within the mine area and surrounding cluster area 3.22 μ g/m³ of PM 2.5 & 5.82 μ g/m³ of PM10, where mining operations are being carried out. The impact of mining operations would be negligible beyond 0.5 km.

4.3.8 Emission sources & Quantification

Various point and non-point sources of emissions from Proposed Rough stone and Gravel Quarry of M/s. Shri Rajrudhra Minerals Private Limited is quantified and presented below:

Area Emissions – Total Material handling (Rough Stone)

Quantity, TPA	M/s.Shri Rajrudhra Minerals Private Limited Rough Stone: 57,26,860 m3 Gravel: 2,154,10 m3 (Five Years)
Operational Hours Per Year	2400
Activity Rate, t/hr.	400.9645
Emission of dust, g/t.	0.19
Emission of dust, g /hr.	57.878
Area of influence, m2	628
Uncontrolled emission rate g/s/m2	0.000072138
Controlled emission rate, PM10 g/s/m2	0.000072138
Controlled emission rate, PM2.5 g/s/m2	0.0006542

Line Source – Transport of Rough Stone from Pit to Boundary

Quantity, TPA	M/s.Shri Rajrudhra Minerals Private Limited Rough Stone: 57,26,860 m3 Gravel: 2,154,10 m3 (Five Years)
Operational Hours Per Year	2400
Capacity of each Dumper (T)	10
Total No. of Tippers/ year	417195
Lead length/trip, Km	0.9
Total VKT/Year	98634
Emission Kg/VKT	0.29
Total emission Kg/Year	87456
Uncontrolled emission rate g/s/m	5.4324
Controlled emission rate, PM10 g/s/m	0.54324
Controlled emission rate, PM2.5 g/s/m	0.43125

Area Emissions – Total Material handling (Cluster Rough Stone)


Alea Lillissions To	tal Material Handling (Cluster Rough Stone)
Quantity, m3	M/s.Shri Rajrudhra Minerals Private Limited Rough Stone: 57,26,860 m3 Gravel: 2,154,10 m3 (Five Years) M/s. Shri Rajrudhra Minerals Private Limited Rough Stone: 13,89,785.17 m3 Gravel: 92,026 m3 M/s. Shri Rajrudhra Minerals Private Limited Rough Stone: 787185 m3 Gravel 98172 m3
Operational Hours Per Year	2400
Activity Rate, t/hr.	389.47
Emission of dust, g/t.	0.35
Emission of dust, g /hr.	95.45
Area of influence, m2	635
Uncontrolled emission rate g/s/m2	0.00097454
Controlled emission rate, PM10 g/s/m2	0.00097454
Controlled emission rate, PM2.5 g/s/m2	0.00064214

Line Source – Transport of Rough Stone (Cluster)


M/s.Shri Rajrudhra Minerals Private Limited Rough Stone: 57,26,860 m3 & Gravel: 2,154,10 m3 (Five Years) M/s. Shri Rajrudhra Minerals Private Limited Rough Stone: 13,89,785.17 m3 Gravel: 92,026 m3 M/s. Shri Rajrudhra Minerals Private Limited Rough Stone: 787185 m3 Gravel 98172 m3
2400
10
594585
0.25
984526
0.26
25456
5.67875
0.567875
0.49945

Note: *Emission factor computed based on wind speed of 2 m/s, and moisture content of 10 %. + Emission factor computed based on silt content of 10 % and moisture content of 10 %



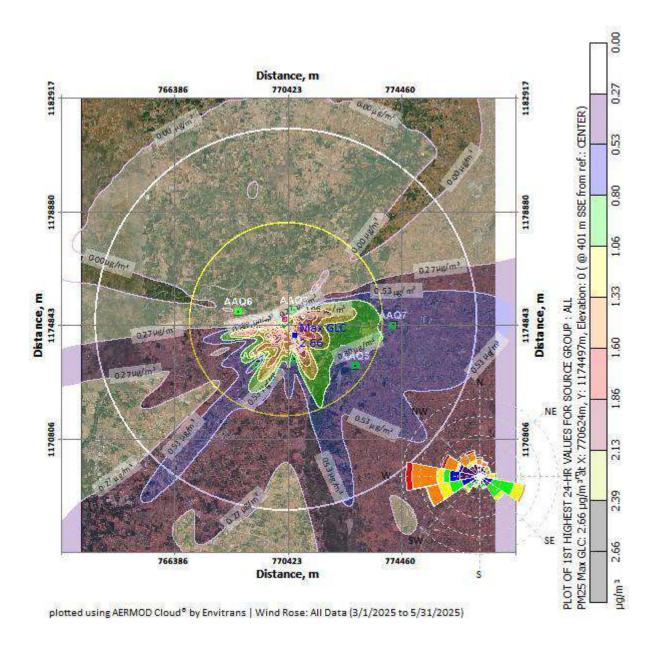



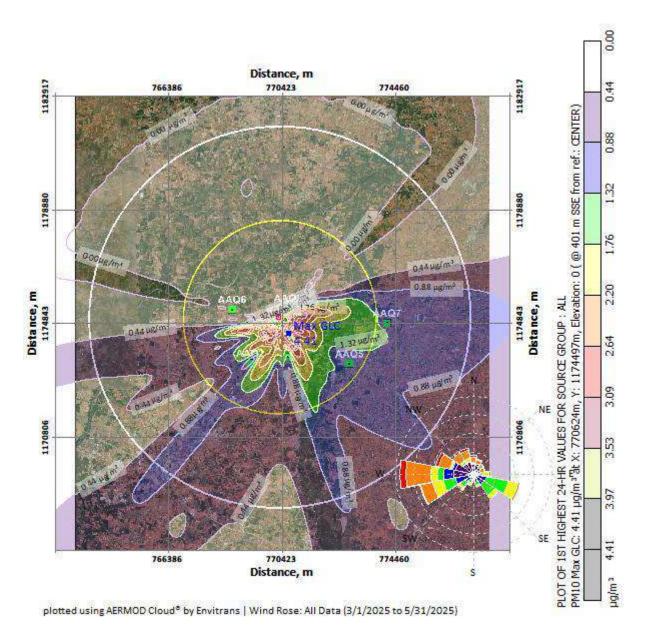


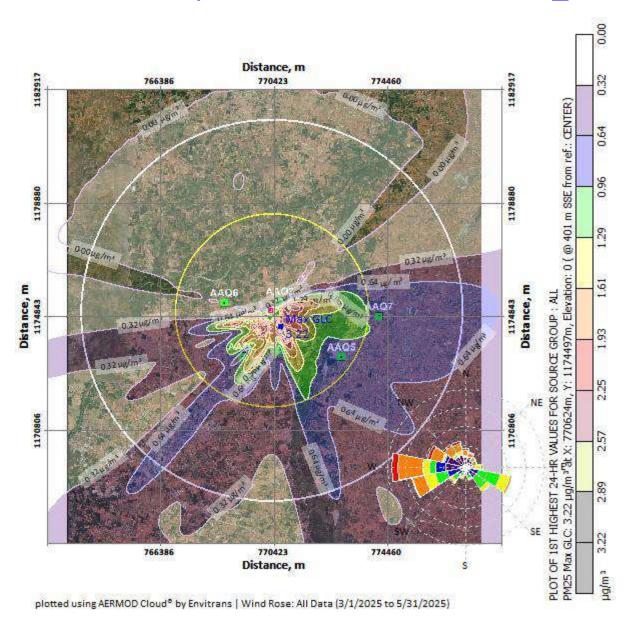


FIG 4.4 Isopleth of GLC Prediction -Cumulative for PM_{2.5}

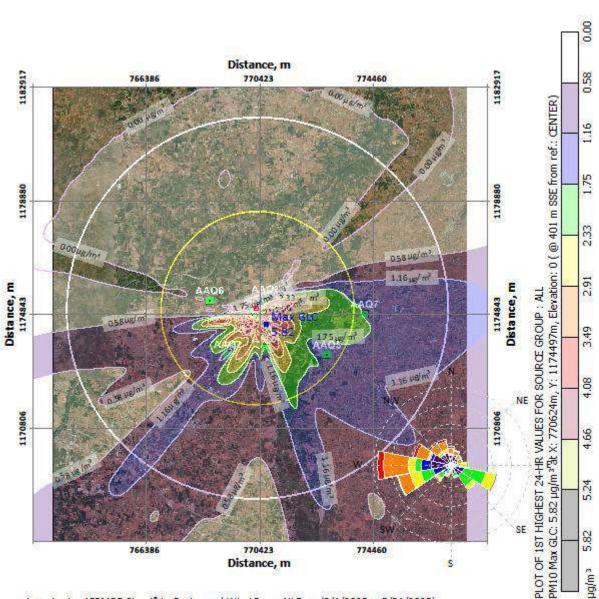

plotted using AERMOD Cloud® by Envitrans | Wind Rose: All Data (3/1/2025 to 5/31/2025)

FIG 4.5 Isopleth of GLC Prediction -Cumulative for PM₁₀

PREDICTED AMBIENT AIR QUALITY:

The post project Concentrations of PM10, PM2.5, (GLC) (base line + incremental) after adopting necessary control measures is given in Table No - 4.4.

	Table 4.4 Concentrations of PM2.5 after Project Implementation				
SL. No	Location	Background Concentration	Predicted incremental Concentration	Post Project Concentration	Statutory Limits in µg/m³
1	Project site	37.10	2.66	39.76	
2	Panampatty	32.6	2.39	34.99	
3	Kottathurai	27.6	2.13	29.73	
4	Melkaraipatty	29.2	1.86	31.33	60
5	Keeranur	31.4	1.60	33.0	
6	Rajampatti	29.5	1.33	30.83	
7	Bommanallur	25.7	1.06	26.76	
	Cluster Conce	ntrations of PM	2.5 after Project	Implementation	
SL. No	Location	Background Concentration	Predicted incremental Concentration	Post Project Concentration	Statutory Limits in µg/m³
1	Project site	37.10	3.22	40.32	
2	Panampatty	32.6	2.89	35.49	
3	Kottathurai	27.6	2.57	30.17	
4	Melkaraipatty	29.2	2.25	31.45	60
5	Keeranur	31.4	1.93	33.33	
6	Rajampatti	29.5	1.61	31.11	
7	Bommanallur	25.7	1.29	26.99	
	Concentr	ations of PM10	after Project Imp	lementation	
		Background	Predicted		Statutor
SL.	Location	Concentrati	incremental	Post Project	y Limits
No		on	Concentration	Concentration	in μg/m³
1	Project site	80.4	4.41	84.81	
2	Panampatty	69.4	3.97	73.37	
3	Kottathurai	59.9	3.53	63.43	
4	Melkaraipatty	59.4	3.09	62.49	100
5	Keeranur	68.4	2.64	71.04	
6	Rajampatti	64.1	2.20	66.30	
7	Bommanallur	55.7	1.76	57.46	

Cluster Concentrations of PM10 after Project Implementation					
SL. No	Location	Background Concentrati on	Predicted incremental Concentration	Post Project Concentration	Statutor y Limits in µg/m³
1	Project site	80.4	5.82	86.22	
2	Panampatty	69.4	5.24	74.64	
3	Kottathurai	59.9	4.66	64.56	100
4	Melkaraipatty	59.4	4.08	63.48	
5	Keeranur	68.4	3.49	71.89	
6	Rajampatti	64.1	2.91	67.10	
7	Bommanallur	55.7	2.33	58.03	

The above report seems that, even in the worst-case scenario, the resultant added concentrations with baseline figures show that the values of ambient air quality for PM₁₀ are in the range of 57.46 μ g/m³ to 84.81 μ g/m³ and for PM_{2.5} are in the range of 26.76 μ g/m³ to 39.76 μ g/m³ and PM₁₀ are surrounding area range of 58.03 μ g/m³ to 86.22 μ g/m³ and for PM_{2.5} are in the range of 26.99 μ g/m³ to 40.32 μ g/m³ which are within the statutory limits in each case. The mitigation measures undertaken in the mine for control of air pollution are given below.

- Wet drilling will be practiced in drilling operation.
- Water sprinkling will be done in haul roads & loading etc.
- The mines workers are provided with the dust masks.
- Three-layer plantation in the safety zone.
- DG sets shall be periodically maintained as per manufacturer's specifications.

4.4 ASSESSMENT OF SIGNIFICANCE OF IMPACTS (CRITERIA FOR DETERMINING SIGNIFICANCE, ASSIGNING SIGNIFICANCE).

4.4.1 NOISE ENVIRONMENT

The main noise generating source during mining operation and related activities are drilling, excavation, loading and transportation. Intermittent noise is generated due to operation of diesel generator.

4.4.2 Likely Noise Levels in Lease Area due to mining activity

S.No.	Source Name	Noise Level in dB (A)
1	Diesel generator	90
2	Excavator Operation	86
3	Trucks movement	82
4	Drilling	96
5	Blasting	102

It is expected that the generated noise will be limited within the mine lease area and there will be no profound effect of noise on the buffer zone. The noise level will be maintained below the threshold limit by vigorous maintenance of the machineries. Wet drilling with dust extractor is being used to reduce the noise level during the mining operation.

Noise levels were measured in the lease area and in the buffer zone area are given below.

TABLE 4.5 Noise Levels in Monitoring Locations				
S. No.	Location	Distance and direction from Mine lease area	Day Equivalent (in dBA)	Night Equivalent (dBA)
1	Project site	Core Zone	50.1	40.4
2	Panampatty	1.90 km, SW	45.7	39.8
3	Kottathurai	1.21 km, NE	43.6	40.5
4	Melkaraipatty	1.74 km, SS	46.5	41.0
5	Keeranur	3.98 km, SE	51.3	42.2
6	Rajampatti	1.52 km, W	47.7	42.5
7	Bommanallur	6.18 km, E	50.0	42.0

The noise levels are within the MoEF & CC limits of 70 dB(A) in the working area and in the buffer areas, the values are below the limit of 75 dB(A). Since, the residential area norm has been considered for all six locations mentioned above, during mining operation mine lease area will be considered as industrial area/quarry area for which DGMS norms 85 dB(A)/CPCB guidelines 75 dB(A).

4.4.3 Impact of Noise due to mining

- ♣ Noise generation in mining is due to operation like drilling, blasting and transportation of minerals within and outside the lease area.
- ♣ As per DGMS (Directorate General of Mines Safety) limits, the acceptable noise level is 85 dB(A) for an exposure period of 8 hours.
- ♣ Exposure to loud noise can also cause high blood pressure, heart disease, sleep disturbances, and stress. Noise pollution also impacts the health and well-being of wildlife.
- ♣ Noise exceeding prescribed limits may cause impairment like abnormal loudness perception, tinnitus which causes a persistent high-pitched ringing in the ears, paracusis or distorted hearing.

4.5 MITIGATION MEASURES

4.5.1 Noise level control.

- ♣ As the distance between the source and receptor increases, the noise level decreases. Hence, there will be a natural attenuation.
- ♣ The proponent has planned to develop green belt in the periphery of the lease area which diminishes sound volume by dampening them.
- ♣ All the equipment/machinery/tippers involved will be properly maintained to control noise generation.
- Conducting regular health checkups for employees involved.
- ♣ Employees will be made to work on shifts to reduce their exposure time.
- Providing earplugs to all employees.
- Providing green walls/nets wherever possible.

By adopting these measures, the noise levels will be maintained well within MoEF & CC limits since the baseline value is low.

4.5.2 IMPACTS DUE TO VIBRATION

There will be negligible vibration of ground due to the following activities.

- Due to Blasting
- Due to Drilling
- Due to movement of machinery

Impacts

- ♣ Though vibration will be only felt by the people working inside the lease area it is usually undesired.
- Vibration may also cause fly rocks.
- ♣ It may frighten the birds and small insects in the lease area. However, it will be felt only for a short period.

Mitigation measures

- ♣ The DG set will be kept within the acoustic enclosure made by the stone blocks.
- Drills will be equipped with sharp bits and wet drilling will be adopted.
- ♣ A well-planned green belt is proposed for the mining to reduce noise level.
- Proper warning system before blasting will be adopted and clearance of the area before blasting will be ensured.
- ♣ Regular maintenance of the machineries and vehicles to reduce the noise level.
- Use of ear muffs by the workers with occupational exposure to noise.
- ♣ Carrying out blasting on limited scale, only from 12:00 PM to 2:00 PM
- ♣ Control of fly rock and vibration by maintaining peak particle velocity within the standard as prescribed by the DGMS and MOEF & CC.
- ♣ Shallow depth jackhammer drilling and blasting is proposed to be carried out with minimum use of explosive.
- ♣ Supervising blasting by competent and statutory Foreman/ Mines Manager.

4.5.3 SOCIO ECONOMIC IMPACT

From the primary Socio-economic survey & through secondary data available from established literature and census data 2011, it is found that there would be positive impact on Socio-economic condition of the nearby area. There is no habitation within 300 m of the proposed mining lease area. Therefore, no major impact is anticipated on the nearby habitation during the entire life of the mine. The entire lease area is in the proponent's possession. Hence, there are no habitations or hutments in the core zone area and no rehabilitation or resettlement problems will arise here.

The mining operations in the proposed mine will employ about 66 persons directly and indirect basis through allied opportunities in logistics, trading, repairing works etc. good employment potential will arise, which will provide raising income levels and standards of living in the area through various service related activities connected with the project operations as shown under.

- Project related logistical operations for transport of Rough Stone, etc,
- Various trading services for consumer goods, spare parts, sundry items, etc.
- Contractual services connected with the project.
- Green belt and horticultural works in the project.
- Casual labor needs for various activities.

The State and the Central governments will also get benefited through financial revenues by way of royalty, tax etc from this project.

Mine management will contribute for the upliftment of these villages by conducting regular medical camps, assistance in developing necessary infrastructure facilities like maintenance of schools, village roads, drinking water supply, etc.

From above details, it is clear that the project operations will have highly beneficial positive impact in the area. However, towards the socio economic development of the surrounding area, the proponent has earmarked an amount of Rs.8.0 Lakhs under Corporate Environmental Responsibility.

4.5.4 OCCUPATIONAL HEALTH

Impacts on humans due to various mining activities

The occupational risk due to proposed mining may be due to drilling, blasting, excavation and transportation. A total of 66 workers will be engaged in the mining activity. Mining activity may cause various health problems to the mines workers as follows:

- ➤ Dust generated during excavation, drilling, stone cutting, sizing and transportation may cause health problems like Silicosis, Asthma, Tuberculosis and other respiratory lungs disorders.
- > Heavy weight lifting by the workers may cause injuries to arms, legs and back.
- ➤ Noise generated during the mining activity may cause Noise Induced Hearing Loss (NIHL).

Table 4.6ss Impacts on humans due to various mining activities				
S.No.	Type of activity	Impact		
1	Dust generation due to drilling and blasting	Continuous exposure to dust causes Pneumonia, Tuberculosis, Rhematic arthritis and Segmental Vibration		
2	Noise generation due to drilling and blasting	Short term impact will be lack of sleep,		
3	Unexpected accidents	Risks include fly rocks, cracks or fissures due to improper mining methods		

Mitigation measures

- > The mines worker will be provided with dust mask to minimize the inhalation of the dust.
- Water sprinkling twice in a day is in practice on the haul roads, near excavation and roads to reduce the fugitive dust emission.
- Wet drilling and drilling with dust extractor will be practiced.
- Ear muffs will be supplied to the workers working in the noise prone area

- > The mining site will be supplied with first aid facilities and the entire mines worker will have access to that.
- > The mines workers will be well trained about the safety practices in the mining activities.
- As per Mines Rules, 1955, medical examination of employees at the initial stage and periodically, shall be done by a team of qualified medical officers provided by the project proponent.
- > Regular medical checkup camps shall also be arranged for detection of occupational diseases and minor disease in the nearby rural population.
- Free checkup and medicine for treatment for their acute and chronic illness shall be provided by the lessee. Conducting periodical Medical Examination as per DGMS.
- > Making all first aid kits available in mines office
- Keeping fire extinguisher in place
- > Educating the employees about how to handle unexpected happenings
- Posting information containing emergency contact numbers in mines office
- > By adopting all these measures, the safety of the employees working in the quarry will be ensured.

4.5.5 WASTE MANAGEMENT

Solid Waste

Since the entire mined out material will be utilized there will not be any solid waste generation from this project. However, the Solid waste (MSW) generated from administrative activities will be properly collected and disposed to Govt. Authorized yards / Re-cylers / Disposers.

Liquid Waste

There is no process effluent generation from this mine. Hence no liquid waste is generated. Domestic wastewater i.e 1.8 KLD will be discharged in soak pit via septic tank.

Hazardous Waste Management

In this project the following management practices will be followed:

In the quarrying operation, the source of hazardous waste is from machinery maintenance activities that are waste oil/ Waste lubricants / Used filters / Used Hydraulic horses. it will be properly collected in the source level, stored in impervious storage yards and disposed of as per the Hazardous waste (Transboundary Movement) Management Rules, 2016.

Plastic Waste

Single use plastics/ use and throwaway plastics will be banned in the site as directed by the Tamil Nadu Government vide GO(Ms)No.84 regarding ban on use of plastic products. The employees will be encouraged to use compostable material or reusable material.

CHAPTER 5

ANALYSIS OF ALTERNATIVES

5.1 DESCRIPTION OF EACH ALTERNATIVE

Analysis of alternative site helps in selection of best possible site for the project. On one hand it helps to closeness to the existing infrastructure and on other hand it also helps to minimize the impact of project on environment.

5.2 SUMMARY OF ADVERSE IMPACTS OF EACH ALTERNATIVE

The project proponent has prepared mining plan under rule 19, 41 & 42 of Tamil Nadu Minor Mineral Concession Rules, 1959 and the same has been approved by the Assistant Director, Dept. of Geology & Mining, Dindigul vide Rc.No. 587/2025/Mines, dated 07.08.2025.

- There is no forest land or other Eco-sensitive places.
- Proposed mine site is selected on the basis of occurrence of mineral for suitable end use.

Hence seeking alternative site is not required.

5.3 MITIGATION MEASURES PROPOSED FOR EACH ALTERNATIVE

The mining technology is mechanized Opencast in single-shift operation without any change in technology. The operation will be carried out as per DGMS norms. No alternate technology will be used. Details of the technology used are given in Chapter 2.

5.4 SELECTION OF ALTERNATIVE

In case of Mining projects alternate site selection is not necessary as the mining is site specific and the area in which mining will be carried out has been adequately proved for presence of mineral. The deposit is also having good infrastructural facilities for access and development.

The mining technology is mechanized Opencast in single-shift operation without any change in technology. The operation will be carried out as per DGMS norms. No alternate technology will be used. Details of the technology used are given in Chapter 2.

CHAPTER 6

ENVIRONMENTAL MONITORING PROGRAMME

6.1 TECHNICAL ASPECTS OF THE MONITORING THE EFFECTIVENESS OF MITIGATION MEASURES (INCL MEASUREMENTS, METHODOLOGIES, FREQUENCY LOCATION DATA ANALYSIS, REPORTING SCHEDULES EMERGENCY PROCEDURES DETAILED BUDGET AND PROCUREMENT SCHEDULES)

6.1.1 ENVIRONMENTAL MONITORING

Monitoring is done to measure the efficiency of control measures implemented. Regular monitoring of various environmental parameters like air, water, noise and soil environments is needed to assess the status of environment during the project operation.

A schedule is framed with timeline to monitor various parameters during the operation of the project. The schedule is framed based on MoEF & CC and Tamil Nadu State Pollution Control Board. In case the SEIAA/TNPCB/MoEF & CC or other statutory bodies demand monitoring of any additional parameter/factor, the same will also be done.

The proposed quarry is a small quarry. Hence the Mines-in-charge will be responsible for environmental related activities. After obtaining EC, the conditions mentioned in EC will be strictly followed. The Mines-in-charge will be responsible for implementing the conditions. EC compliance report will also be submitted periodically.

6.1.2 OBJECTIVES OF ENVIRONMENTAL MONITORING

The objectives of Environmental Monitoring are as follows.

- Monitoring and analysis of air and water samples
- Implementing the control and protective measures.
- ♣ Coordinating the environment related activities within the project as well as with outside agencies. Collecting statistics of health of workers and population of the surrounding villages. Green belt development etc.
- Monitoring the progress of implementation of Environmental Management Programme.

- Monitoring the noise generation in and around the project areas.
- ♣ Monitoring of wastewater treatment and disposal of solid waste.
- ♣ The laboratory will be suitably equipped for sampling/testing for various environmental pollutants.

6.1.3 ENVIRONMENTAL MONITORING SCHEDULE

To evaluate the effectiveness of Environmental Management Programme, regular monitoring of the important environmental parameters will be taken up. The frequency of monitoring different parameters is given in table 6.1.

Table 6.1 Environmental Monitoring Schedule			
SI.No.	Description of Parameters	Parameters	Frequency
1	Air	Air Quality for SPM, PM-10, PM-2.5, SO_2 and NO_x	24-hour average samples Once in a 3 month.
2	Water	General, Physical, and chemical parameters	Once per season
3	Noise	L _{eq} , L _{max} , L _{min} , L _{eq} Day & L _{eq} Night dB(A)	8-hour average samples Once in a 3 month.
4	Soil	Physical and Chemical characteristics.	Once per season

6.1.4 LOCATION

Monitoring of the above-mentioned environmental parameters would be done at appropriate and sensitive areas. The exact location of monitoring is given as Figure – 3.4, 3.10, 3.12 & 3.14.

6.1.5 MEASUREMENT METHODOLOGY

(a) Ambient Air Quality

Ambient air quality will be monitored for SO_2 , NO_x , PM_{10} and $PM_{2.5}$. The instruments like high volume air samplers and Respirable dust samplers would be used for this purpose. These parameters will be monitored as mentioned in the monitoring schedule previously.

(b) Water Quality

Water quality analysis will be done quarterly and the monitored parameters include pH, Temperature, TDS, etc. as specified by SPCB from time to time.

(c) Noise Monitoring

Noise level will be monitored in working environment mainly noise producing sources over the boundary and around the mining area.

(d) Green Belt and Afforested Areas

Continuous vigilance and monitoring of green belt will be done for performance and survival rate of the saplings. Watch and ward personnel will properly guard the plantation. Provision will be made for fertilizers application and watering on schedule.

(e) Socio-Economics

Socio-economic of the core and buffer zone details elaborated in Chapter-3.

6.1.6 TECHNICAL ASPECTS OF MONITORING THE EFFECTIVENESS OF MITIGATION MEASURES

The above monitoring schedule will be followed periodically. After collection of the data, the mines-in-charge will analyze the data obtained. The data thus obtained will be incorporated in the EC Compliance report submitted to the regional office, MoEF & CC. The measurement methodologies will be as per CPCB/BIS/MoEF & CC/DGMS norms.

6.1.7 EMERGENCY PROCEDURES

In case of any emergency due to environmental conditions, the mines in-charge will immediately report to the top-level management and the emergency response protocol will be implemented as per MoEF & CC/ SPCB / DGMS norms.

6.1.8 REPORTS TO BE GENERATED

The Project Proponent will maintain records of each test and its interpretation so as to formulate an adequate Environmental Management Plan. The set of records planned to be maintained by Project Proponent are given in below table 6.2.

Table 6.2 Important Records to be maintained by PP			
S.No.	Particulars		
1	Monitoring results for Air, Water & Soil.		
2	Records of slope failure, land erosion & drainage.		
3	Plantation Records		
4	Environmental and related standards/ norms		
5	Records pertaining to statutory consents, approvals.		
6	Periodic Medical examination (PME) records.		
7	Complain register (Environmental pollution)		
8	Records on water and electricity consumption		
9	Periodic progress records.		
10	Environmental Expenses Records		

6.1.9 DETAILED BUDGET AND PROCUREMENT SCHEDULES

The budget planned for environmental monitoring is given below.

Table 6.3 - Environmental Management Plan Budget

	rable oib Environmental rianagement rian baaget				
SI. No	Budget planned for	Capital Cost Amount (INR)	Recurring Cost/Annum Amount (INR)		
1	Air Environment	10.92	4.77		
2	Noise Environment	0.30	0.02		
3	Waste Management	0.25	0.13		
4	Mine Closure	1.61	0.32		
5	Implementation of EC, Mining	2.35	1.09		
	Plan & DGMS Condition	2.55	1.05		
	Total	15.43	6.32		

Total EMP Cost for 5 years is 50.35 lakhs (This amount will be subjected to change after public hearing) i.e., Rs.15.43 Lakhs of Capital Cost + Rs. 34.92 Lakhs of Recurring Cost (For 5 Years)



CHAPTER 7 ADDITIONAL STUDIES

The following Additional Studies were done as per items identified by project proponent and the regulatory authority.

- Public Consultation
- Risk Assessment
- Disaster Management Plan
- Cumulative Impact Study
- Mine Closure Plan
- Slope Stability Plan

7.1 PUBLIC CONSULTATION

This draft EIA/EMP report will be exposed to public consultation as per mandatory procedures through the District Collector and State Pollution Control Board officials after giving 30 days advance notice in two local newspapers about the scheduled date and time for conduct of the public hearing procedures. The opinions, concerns and objections of stakeholders will be recorded during the public hearing. All the public queries and the replies to the query by the project proponent and officials concerned will be recorded and incorporated in the EIA/EMP report for approval by SEIAA, Tamil Nadu.

7.2 RISK ASSESSMENT

The DGMS risk assessment process is intended to identify existing and probable hazards in the work environment and all operations and assess the risk levels of those hazards in order to prioritize those that need immediate attention. Further, mechanisms responsible for these hazards are identified and their control measures, set to timetable are recorded along with pinpointed responsibilities.

The whole quarry operation will be carried out under the direction of a Qualified Competent person holding certificate of competency to manage a metalliferous mine granted by the DGMS. Factors of risks involved due to human induced activities in connection with this proposed mining & allied activity with detailed analysis of causes and control measures for the mine is given in below Table 7.1.

Table 7.1 Risk Assessment and Control Measures

S.NO	Risk Factor	Causes of risk	Control Measures		
1	Accidents due to explosives and heavy mining machineries	Improper handling and unsafe working practice	 All safety precautions and provisions of Mine Act, 1952, Metalliferous Mines Regulation, 1961 and Mines Rules, 1955 will be strictly followed during all mining operations. Entry of unauthorized persons will be prohibited. Fire-fighting and first-aid provisions in the mine office complex and mining area. Provisions of all the safety appliances such as safety boot, helmets, goggles etc. will be made available to the employees and regular check for their use. Quarry operation will be done as per approved mining plan and other applicable statutory guidelines issued by DGMS, Dept. of Mining & Geology-TamilNadu. Handling of explosives, charging and firing shall be carried out under competent statutory persons. A comprehensive standard operating procedure (SOP) will be prepared as per DGMS guidelines and the same will be circulated to all the employees and it will be strictly followed in the all face of mining operation. 		
2	Drilling	Improper and unsafe practices. Due to high pressure of compressed air, hoses may burst. Drill Rod may break.	 Safe operating procedure established for drilling (SOP) will be strictly followed. Only trained operators will be deployed. No drilling shall be commenced in an area where shots have been fired until the blaster/blasting foreman has made a thorough Examination of all places. Drilling shall not be carried on simultaneously on the benches at places directly one above the other. Periodical preventive maintenance and replacement of worn-out accessories in the compressor and drill equipment as per operator manual. Drills unit shall be provided with wet drilling to ensure efficient working. 		
3	Blasting	Fly rock, ground vibration, Noise and	3 1 , 1 11 31		



		dust. Improper charging, stemming & Blasting/ fining of blast holes. Vibration due to movement of vehicles.	blasting crew during initial stage of operation. • Shots are fired during day time only.
5	Transportation	Potential hazards and unsafe workings contributing to accident and injuries. Overloading of material. While reversal & overtaking of vehicle. Operator of truck leaving his cabin when it is loaded.	 Before commencing work, drivers personally check the dumper/truck/tipper for oil(s), fuel and water levels, tyre inflation, general cleanliness and inspect the brakes, steering system, warning devices including automatically operated audio-visual reversing alarm, rear view mirrors, side indicator lights etc., are in good condition. Unauthorized person will not be allowed to operate or ride on the vehicle. Loading according to the vehicle capacity. Periodical maintenance of vehicles as per operator manual.
6	Natural calamities	Unexpected happenings	 An emergency management plan will be prepared considering all possible national calamity and the same will be executed if any such situation occurs. Escape Routes will be provided to prevent inundation of storm water. Fire Extinguishers & Sand Buckets in the designated areas.
7	Failure of Mine Benches and Pit Slope	Slope geometry, Geological structure	Ultimate or over all pit slope shall be below 60° and each bench height shall be 5m height.

7.3 DISASTER MANAGEMENT PLAN

This being a small rough stone project that too working in a safe area, no major disaster is expected after following all the statutory rules and regulations.

7.3.1 MODEL DISASTER MANAGEMENT PLAN

The lessee has formulated the disaster Management plan keeping all eventualities in mind.

The mining operation will be carried out under the direction of qualified mines manager and supervisors, based on the guidelines and directions of Directorate General of Mines Safety (DGMS) and Indian Bureau of Mines. Code of practice of different operations will be formulated to ensure safety of men and machines and to avoid various hazards mentioned above. Mine workers will be provided training on safe work practices. The following natural/ industrial hazards may occur during normal operation; slope failure at the mine faces; accident due to heavy equipment/ machinery.

In order to prevent or take care of hazard / disasters if any the following control measures have been adopted.

- All safety precautions and provisions of Metalliferous Mines Regulations (MMR),
 1961 is strictly followed during all mining operations.
- Observance of all safety precautions for blasting and storage of explosives as per MMR 1961.
- Entry of unauthorized persons into mine & allied areas is completely prohibited.
- Fire-fighting and first-aid provisions in the mines office complex and mining area are provided.
- Provisions of all the safety appliances such as safety boot, helmets, goggles, dust masks, ear plugs and ear muffs etc. are made available to the employees and the use of same is strictly adhered to through regular monitoring.
- Training and refresher courses for all the employees working in hazardous premises. Working of mine, as per approved plans and regularly updating the mine plans.

- Handling of explosives, charging and blasting are carried out only by qualified persons following SOP.
- Checking and regular maintenance of garland drains and earthen bunds to avoid any inflow of surface water in the mine pit.
- Provision of high-capacity standby pumps with generator sets with enough quantity of diesel for emergency pumping especially during monsoon.
- A blasting SIREN is used at the time of blasting for audio signal.
- Before blasting and after blasting, red and green flags are displayed as visual signals. Warning notice boards indicating the time of blasting and NOT TO TRESPASS are displayed at prominent places.
- Regular maintenance and testing of all mining equipment were carried out as per manufacturer's guidelines.

7.3.2 OBJECTIVE OF DISASTER MANAGEMENT PLAN

The objective of disaster management plan is to identify mitigation measures to avoid hazards turning in to risk, the materials required for implementing the same, the personnel requirement and their roles and responsibilities, and the communication and operating procedures to be adopted in case of an emergency.

Communication System

The telephone numbers and addresses of mine sites in the vicinity, nearest fire station, police station, local hospital, electricity department, ambulance, and local public representatives and revenue officials shall be prepared and kept in custody of PP.

Facilities

The office shed will have provision of first aid center to provide first aid in the event of an emergency. The office shed will also function as emergency control room. It will be provided with telephone and mobile phones, and a vehicle for emergency transport.



Personnel

The PP is responsible for overall supervision of the disaster management plan. He will be assisted by supervisors, in implementing the emergency management plan and procedures.

Operating Procedures

The operating procedures during emergencies are related communication to the immediate supervisor, who would relay the same to PP. The PP may assess the requirement of first aid, external assistance, transportation to nearby hospital contingent on the emergency. In the absence of mines manager, the senior most supervisor will be made responsible for disaster management.

7.4 CUMULATIVE IMPACT STUDY

There are two existing Quarries and two proposed quarry are located within a radius of 500 m from this proposed project area. The existing and proposed quarries situated within 500 m radius are presented in below Table 7.2 and the letter received from Dept. of Geology and Mining, Dindigul stating the quarries detail within 500m radius is enclosed in Annexure – 4.

Table 7.2 Details of Quarries within 500m radius

SI. No	Name of the Lessee	S. F. No.	Extent (Ha)	Lease Status		
	a. Existing Quarries					
1	M/s.Shri Rajrudhra Minerals, Private Limited, No.99/2B1B, 1st Floor, Vellore Main Road, Arcot Taluk, Ranipet District	392/2(P), 393/2(P), 394/1, 395, 396/1, 397, 398/1A1(P)	4.42.0 Ha	06.03.2024 – 05.03.2029		
2.	K.Vinjai Mani Oosai, S/o	388(P)	0.40.5 Ha	30.08.2023 – 29.08.2028		



	Kandasamy 23, Keezhvadam Street, Palani Taluk. Dindigul Dist.	b. Proposed Quar	ries	
1	M/s.Shri Rajrudhra Minerals Private Limited, No.99/2B1B, 1st Floor, Vellore Main Road, Arcot Taluk, Ranipet District	381/1(P)	5.57.0 Ha	Proposed (Rough stone)
2	M/s.Shri Rajrudhra Minerals Private Limited, No.99/2B1B, 1st Floor, Vellore Main Road, Arcot Taluk, Ranipet District	394/2, 396/2, 402(P), 403(P), 407/1A1,407/1A2, 407/1B,407/2A, 407/2B,408/1(P), 408/2(P),408/4, 409(P),698(P)	14.40.0 Ha	Applied (Rough stone)

As seen above, although the individual lease area of this project is less than 5 hectares, the one existing Quarries within a 500-meter radius, along with this subject project, add up to more than 5 hectares i.e. 24.79.50 Ha. A map showing the existing and proposed quarry located within 500m radius is given in Figure 1.1.

The cumulative production load of existing and proposed Rough stone quarries within cluster is shown in below table.

Table 7.x – Salient Feature of Cluster Quarries

Description		P1	P3	P4
Name of the Quarry		M/s. Shri Rajrudhra Minerals Private Limited		
Geological Resources in m3	Rough stone	2201300	35,80,590	1,11,59,390
	Weathered Formation	-	-	-
	Gravel	132078	1,10,172	2,38,210
Mineable Reserves in m3	Rough stone	787185	13,10,240	57,26,860
	Weathered Formation	-	-	-
	Gravel	98172	92,026	2,15,410
Five years plan period as in the approved mining plan / EC	Rough stone	698915	13,10,240	57,26,860
	Weathered Formation	-	-	-
	Gravel	98172	92,026	2,15,410
Production per day in Tons		2072	2784	11434
Lorry Loads per day in Nos		207	279	1143
Employment in Nos		35	38	66
Proposed Depth in meters		38 m BGL	67 m BGL	82 m BGL
Status of the quarry		Existing	Proposed	Proposed



7.5 CLUSTER MINE CLOSURE PLAN

In the mine closure stage all necessary measures will be taken as per Act & Rules, there is no proposal for back filling, reclamation and rehabilitation in any of the proposals. The quarried pits after the end of life of mine will be properly fenced all around to prevent inherent entry of public and cattle and all the statutory requirements will be fulfilled. As already explained, in the post mining stage the rainwater harvested in the mined- out void shall be utilized for irrigation and domestic needs locally. The mine closure plan is provided in Figure 2.11.

7.6 SLOPE STABILITY PLAN

The factors that affect slope stability of the mine are detailed below.

- Geological structure comprising dip, intervening shear zone formation, clay intrusion, joints / discontinuities, faults etc.,
- Lithology of formation
- slope geometry
- Ground water availability which may cause increased thrust on the faces

Site Specific Analysis

- The quarry lease area is plain terrain which is covered by Gravel formation.

 The rock type noticed in the lease area is Charnockite which contains mostly

 Quartz and Feldspar with some ferromagnesian.
- Since the formation is of homogeneous rock type probability of slope failure is low and can be avoided if proper measures are adopted.
- There will be a 7.5m safety zone which will form a ridge which can also take care of the top section and as such no risk is envisaged on this front.

Mitigation Measures

- Regular inspection of the mine faces to be carried out by pp for ensuring absence of any structural features like faults, joints, dyke, intrusive material in the rock strata which may affect the slope stability and cleared.
- No loose material or boulders is to be stacked on the mine top or pit benches.
- Height of the benches should be 5m.
- Haul road formation will be at 1 in 15 slope with adequate road width.
- There will be no ground water table intersection.
- No seepage is expected due to formation. Adequate drainage management system comprising peripheral garland drain, settling pond to regulate monsoon water will be created to prevent saturation of compact layers, apparent drainage over the bench slope to avert damages to quarry face and manage the water flow.



CHAPTER 8 PROJECT BENEFITS

The project area is located on barren land, thereby causing no impact on the loss of agriculture or forest land. The project will create employment opportunities in the area. There will be no adverse effect of mining on the socioeconomic status of the people; rather, mining activities will improve their standard of living. The mining activity creates employment opportunities for the local people, and this definitely raises their economic status. Apart from the overall beneficial impact of the project on the local people of the region, it is felt necessary to augment facilities in the fields of education, health, and social awareness, including concern for the environment and ecosystem.

The mining activity at proposed Rough Stone Quarry of **M/s. Shri Rajrudhra Minerals Private Limited** will create direct employment opportunity for 66 local people.

Based on the request letter received from Government High School, Melkaraipatti, the PP has proposed CER amount of Rs. 8.0 Lakhs for various activities. The copy of the letter is enclosed below.

அனுப்புநர் மு பழனிச்சாமி, தலைமையாசிரியர், அரசு உயர்நிலைப்பள்ளி, மேல்கரைப்பட்டி-624617. பழனி வட்டம், இண்டுக்கல் மாவட்டம்.

பெறுநர்

இயக்குநர் அவர்கள், ஸ்ரீ ராஜ்ருத்ரா மினரல்ஸ்(பி) லிமிட்., ஆற்காடு -632503.

நக எண் : 64/2025

நாள்: 02.08.2025

மதிப்பிற்குரிய ஐயா,

பொருள் : திண்டுக்கல் மாவட்டம், மேல்கரைப்பட்டி, அரசு உயர்நிலைப் பள்ளி- 5 வகுப்பறைகளில் SMART BOARD அமைத்துத் தர வேண்டுதல் -தொடர்பாக.,

மேல்கரைப்பட்டி அரசு உயர்நிலைப்பள்ளியில் 110 மாணவச் செல்வங்கள் கல்வி பயின்று வருகிறார்கள். 2024-2025 ஆம் கல்வி ஆண்டில் பத்தாம் வகுப்பு பொதுத் தேர்வில் மாணவர்களின் மதிப்பெண் சராசரியில் திண்டுக்கல் மாவட்டத்தில் இரண்டாம் இடம் பெற்றுள்ளோம் என்பதனை மகிழ்வுடன் தெரிவித்துக் கொள்கிறோம்.

மாணவர்களின் கற்கும் ஆர்வத்தினை அதிகரிக்கவும், புரிதலை அதிகப்படுத்துவதற்கும் எளிமைப் படுத்துதற்கும் SMART BOARD வகுப்பறையில் இருந்தால் பயனுள்ளதாக இருக்கும் என கருதுகிறோம். எனவே 5 வகுப்பறைகளில் SMART BOARD அமைத்து தர ஆவன செய்து கொடுக்கும் படி பணிவுடன் வேண்டுகிறேன்.

School Name: GHS, MELKARAIPATTY Dindigul district.

DISE CODE:33131203504

தகையை ஆசிரியர், அரசு உயிரி சைப்பள்ளி மேல்களரப்பட்ட 624 617. புண்டுக்கல் மாவட்டம்.

Figure 8.1 – CER Letter

The list of activities proposed for CER is mentioned below

Table 8.1 CER Activities

S. No.	PROPOSED CER ACTIVITIES	COST IN LAKHS.
1	Plantations inside and outside the school premises	8.0
2	To provide Smart Board facility – 5 Nos	8.0
	8.0	

The above-mentioned CER activities will be spent for Government High School, Melkaraipatti



CHAPTER 9 ENVIRONMENTAL COST BENEFIT ANALYSIS

As per EIA Notification dated 14th Sept., 2006, as amended from time to time, 'Environmental Cost Benefit Analysis' is applicable only if the same is recommended at the Scoping stage.

As per the ToR points issued by SEIAA-TN vide ToR Identification No. TO25B0108TN5329247N (F.No. 12576), dated 25.09.2025 for the proposed project, the 'Environmental Cost Benefit Analysis' is not prescribed.

CHAPTER 10

ENVIRONMENTAL MANAGEMENT PLAN

10.1 <u>DESCRIPTION OF THE ADMINISTRATIVE ASPECTS OF ENSURING OF ENSURING THAT MITIGATIVE MEASURES ARE IMPLEMENTED AND THEIR EFFECTIVENESS MONITORED AFTER APPROVAL OF THE EIA.</u>

10.1.1 OBJECTIVES

The Environmental Management Plan is developed to ensure that a project is implemented in an environmentally sustainable manner, where all contractors and subcontractors, including consultants, understand the potential environmental risks arising from the project and take appropriate actions to minimize those risks. EMP also ensures that the project implementation is carried out in accordance with the planned design and by taking appropriate mitigation measures to reduce adverse environmental impacts during the project's life cycle. The impacts due to this mining project are detailed in Chapter 4 and Mitigation measures at the source level and an overall Management Plan at the site level are elaborated on in this chapter.

10.1.2 BASIC OF EMP

The Environmental Management Plan for the proposed project activities is formulated taking into considerations the following key environmental issues.

- Project activities
- Studies on Environmental Impact Assessment
- Air & water pollution control
- Working zone environment improvement
- Occupational hazards & safety
- Environmental monitoring facilities
- Environmental management costs

EMP covers all phases of the project considering the impacts with mitigation measures and monitoring programme. The plan outlines the measures that will be undertaken to ensure compliance with environmental legislations and to minimize adverse impact. Details of EMP measures for implementation in the mine are given below.

Table 10.1 Environmental Management Plan			
Environmental Parameter	Mitigation Measures		
	Wet drilling to suppress the dust emission from drill machine		
	Regular water sprinkling on haulage road through fixed water sprinkler.		
	3 KLD of water will be used for dust suppression.		
	Avoiding blasting during high wind period, night times and temperature inversion periods.		
	Regular grading of haul road to clear accumulation of loose material.		
Air	It will be ensured that vehicles are properly maintained to comply with exhaust emission requirements		
	Maintenance as per operator manual of the equipment and machinery in the mines to minimizing air pollution		
	Ambient Air Quality Monitoring carried out in the project area and in surrounding villages to access the impact due to the mining activities and the efficacy of the adopted air pollution control measures.		
	Afforestation for control of dust.		
	The following water bodies are located in the study area. Odai – 80m (E), Tank – 700m(NE), 949m (NW), 1.5Km (SE), 1.6Km (SE), Amaravathi River – 2.3 km (NW), Shanmukha River – 3.4 km (SE)		
Surface water	Surface runoff management structures like garland drain of required length which is connected to a settling pond will be constructed around the quarry to collect the rain water.		
	Monthly or after rainfall, inspection will do to ensure performance of water management structures and systems. There is no discharge of any effluent into nearby water bodies.		
Ground Water	The quarrying operation is proposed upto a depth of 82 m below ground level, Water table is found at a depth of 93 m, hence the project will not intersect the Ground water table during entire quarry period.		

	Water required for this project will be sourced from vendors.
Water Consumption and Wastewater	Domestic wastewater generation of 1.8 KLD will be treated in septic tank with soak pit.
generation	Conduct ground water and surface water monitoring for parameters specified by CPCB
	The workers employed are provided with protection equipment, earmuffs and ear- plugs for the protection from high noise level generated at the mine site wherever required.
	Noise levels are controlled by using optimum explosive charge, proper delay detonators and proper stemming to prevent blow out of holes.
Noise	Development of thick greenbelt all along the safety Zone (7.5 m) of the project area to attenuate the noise and the same will be maintained.
	Preventive maintenance of mining machinery and replacement of worn- out accessories to control noise generation.
	Annual ambient noise level monitoring is carried out in the project area and in surrounding villages to access the impact due to the mining activities and the efficacy of the adopted noise control measures. Additional noise control measures will be adopted if required as per the observations during monitoring.
	Controlled blasting using delay detonators will be carried out to maintain the PPV value well within the prescribed standards of DGMS.
Ground Vibration and Fly Rock Control	Drilling and blasting will be carried under the supervision of qualified persons.
Control	Will be Ensured that blast holes are adequately stemmed for the depth of the hole and stemmed with suitable angular material.
	To be Undertake noise or vibration monitoring.
Land	At conceptual stage, the mining pits will be converted into Rain Water Harvesting pit. Remaining area will be converted into greenbelt area.
Environment	No external dumping i.e., outside the project area. The entire material will be sold.


	Garland drains with catch pits / settlement traps to be provided all around the project area to prevent run off affecting the surrounding lands.
	The periphery of Project area will be planted with thick plantation to arrest the fugitive dust, which will also act as acoustic barrier.
	Frequent Soil and ground water testing as per Environmental Monitoring Plan.
Top Soil / Overburden	There is no overburden anticipated during the quarrying operation.
	During mining, thick plantation will be carried out on the mentioned safety zone areas.
Biological Environment	The main attributes that retard the survival of sapling is fugitive dust, this fugitive dust can be controlled by water sprinkling on the haul roads and installing a sprinkler unit near the newly planted area.
	Regular review on green belt development programme.
	Year wise greenbelt development plan mentioned in Chapter III will be monitored.

10.1.3 ADMINISTRATION AND TECHNICAL SETUP

Since this is a very small quarry, the mines in-charge will take care of all environment related aspects. He will ensure effective implementation of environment management plan and to ensure compliance of environmental statutory guidelines through Mine Management Level. The action plan for monitoring consists of monitoring of following environmental components.

- Monitoring of the water/ waste water quality, air quality and solid waste generated.
- ♣ Analysis of the water and air samples collected through external laboratory.
- ♣ Implementation and monitoring of the pollution control and protective measures/ devices which shall include financial estimation, ordering, installation of air pollution control equipment, waste water treatment plant, etc.

- Co-ordination of the environment related activities within the project as well as with outside agencies.
- Collection of health statistics of the workers and population of the surrounding villages.
- ♣ Green belt development.
- Monitoring the progress of implementation of the environmental monitoring programme.
- ♣ Compliance to statutory provisions, norms of State Pollution Control Board, Ministry of Environment and Forests and the conditions of the environmental clearance as well as the consents to establish and consents to operate.

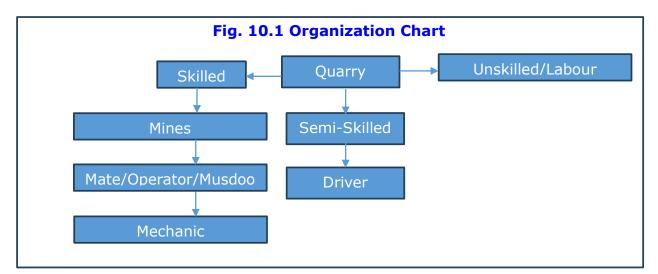

1	Skilled	Mines Manager	1 No
		Foreman/Mine Mate	4 Nos
		Operator	35 Nos
		Mechanic	1 No
2	Semi-Skilled	Diver	10Nos
3	Un-skilled	Labours	15 Nos
		Total	66Nos

10.1.4 ENVIRONMENTAL POLICY

- ➤ The Project Proponent has stipulated a well-defined Environmental policy by which the lessee is committed to conducting business with a strong environmental conscience towards the community, customers, and employees. The Environment policy is given as below.
- > The Environment policy of "Rough Stone and Gravel Quarry of M/s. Shri Rajrudhra Minerals Private Limited is that the rules and commitment are driven towards conservation of the environment.
- > The lessee is committed to efficient use of natural resources based on the reduce, recycle and reuse method.
- > The project is committed to the identification of possible impacts and will take the necessary management steps to mitigate the impacts.
- ➤ Environment performance will be regularly monitored and reported for continual improvement of our environment and health performance.

10.1.5 OCCUPATIONAL SAFETY & HEALTH MANAGEMENT

Occupational safety and health are very closely related to productivity and a good employer-employee relationship. The main factors affecting occupational health in quarries are fugitive dust and noise. Safety of employees during quarrying operations and maintenance of mining equipment will be taken care of as per the Mines Act 1952 and Rule 29 of the Mines Rules 1955. To avoid any adverse effect on the health of workers due to dust, noise, and vibration, sufficient measures have been provided. The health status of workers in the mine will be regularly monitored under an occupational surveillance programme. Under this programme, all employees are subjected to a detailed medical examination at the time of employment. Before the induction of employees, a pre-medical checkup is done. In addition, a periodical medical checkup will be done annually for all employees.

10.1.6 COST OF ENVIRONMENTAL CONTROL MEASURES

The effective implementation of EMP is not only reduce pollution load and comply the regulatory requirement but also increase productivity and improve marketability of product. The capital and recurring cost of EMP for the cluster of mines has been given in below table.

Table 10.2 - Environmental Management Plan Budget

Activities	Mitigation Measure	Capital cost	Recurring Cost per Annum
	Compaction, gradation and drainage on both sides for Haulage Road	0.72	0.72
	Fixed Water Sprinkling Arrangements + Water sprinkling by own water tankers	5.00	0.25
	Muffle blasting – To control fly rocks during blasting	0.00	0.05
Air	Wet drilling procedure / latest eco-friendly drill machine with separate dust extractor unit	3.00	0.06
Environment	No overloading of trucks/tippers/tractors	0.00	0.05
	Stone carrying trucks will be covered by tarpaulin	0.00	0.10
	Enforcing speed limits of 20 km/hr within ML area	0.20	0.02
	Regular monitoring of exhaust fumes as per RTO norms	0.00	0.05
	Regular sweeping and maintenance of approach roads for at least about 200 m from ML	0.00	2.88

	Area		
	Installing wheel wash system near gate of quarry	2.00	0.05
	Sub-Total (A)	10.92	4.77
Noise Provision for Portable blaster shed		0.30	0.02
	Sub-Total (B)	0.30	0.02
Activities	Mitigation Measure	Capital cost	Recurring Cost per Annum
Waste Management	Provision for domestic waste collection and disposal through authorized agency	0.20	0.10
	Installation of dust bins	0.05	0.02
	Sub-Total (C)	0.25	0.12
Mine Closure	Plantation inside ML area (800 Nos.)	1.61	0.32
	Sub-Total (D)	1.61	0.32
	Size 6' X 5' with blue background and white letters as mentioned in MoM Appendix II by the SEAC TN	0.05	0.01
Implementati on of EC, Mining Plan & DGMS	Sampling every 6 Months for	0.00	0.50
Condition	Workers will be provided with Personal Protective Equipment's	0.66	0.07
	Health check up for workers will be provisioned	0.00	0.33



Grand Total	15.43	6.32
Sub-Total (E)	2.35	1.09
Installation of CCTV cameras in the mines and mine entrance	0.15	0.02
No parking will be provided on the transport routes. Separate provision on the south side of the hill will be made for vehicles /HEMMs. Flaggers will be deployed for traffic management	1.44	0.01
Signage & boards for safety precautions	0.05	0.01
First Aid facility Provision	0.00	0.14

Total EMP Cost for 5 years is 50.35 lakhs

i.e.,15.43 Lakhs of Capital Cost + 34.92 Lakhs of Recurring cost (For 5 Years)

10.1.7 CONCLUSION

Various aspects of mining activities were considered, and related impacts were evaluated. Considering all the possible ways to mitigate the Environmental concerns, an Environmental Management Plan was prepared, and INR 50.35 lakhs has been allocated for the same. The EMP is dynamic, flexible, and subjected to periodic review. For projects where major environmental impacts are associated, EMP will be under regular review. Thus, the proper steps will be taken to accomplish all the goals mentioned in the EMP, and the project will have a positive impact on the study area.

CHAPTER 11 SUMMARY& CONCLUSION

11.1 OVER ALL JUSTIFICATION FOR IMPLEMENTATION OF THE PROJECT INTRODUCTION

M/s. Shri Rajrudhra Minerals Private Limited has obtained Precise Area Communication Letter from Assistant Director, Department of Geology and Mining, Dindigul, vide Rc.No. 587/2025 (Kanimam) dated 28.07.2025, to quarry out 57,26,860 m3 of Rough Stone and 2,15,410 m3 Gravel for the period of 5 years with ultimate depth up to 82m BGL, located in S.F. Nos. 394/2, 396/2, 402(P), 403(P), 407/1A1, 407/1A2, 407/1B, 407/2A, 407/2B, 408/1(P), 408/2(P), 408/4, 409(P) and 698(P) Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State.

As per EIA notification, 2006 and its subsequent amendments the proposed "Rough Stone and Gravel Quarry of M/s. Shri Rajrudhra Minerals Private Limited, mines cluster falls under Schedule 1(a) of EIA Notification and its subsequent amendments the project comes under Category B1. The ToR for preparation of EIA/EMP report of the project was approved vide ToR Identification No. TO25B0108TN5329247N (F.No. 12576), dated 25.09.2025. This report has been prepared in line with the approved TOR for production of maximum excavation of 57,26,860 m3 of Rough Stone and 2,15,410 m3 Gravel for the period of 5 years with ultimate depth up to 82m BGL.

S.No.	Description	Status/Remarks
1.	Sector	1(a), non-coal mining
2.	Category of the project	B1
3.	Proposed mineral	Rough Stone and Gravel
4.	Type of Lease	Already operated by other lessee
5.	Extent of the lease	14.40.00 Ha
6.	Proposed depth of Mining	82 m BGL



7.	Method of mining	Opencast Mechanized		
8.	Proposed lease period	5 Years		
9.	Proposed Environmental Clearance	5 Years		
10.	Proposed production quantity for five years	57,26,860 m³ of Rough Stone and 2,15,410m³ Gravel for the period of 5 years		
		with ultimate depth up to 82m BGL.		

11.1.1 LOCATION

The proposed Quarry lease area is situated at S. F. Nos. 394/2, 396/2, 402(P), 403(P), 407/1A1, 407/1A2, 407/1B, 407/2A, 407/2B, 408/1(P), 408/2(P), 408/4, 409(P) And 698(P) of Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State. The area lies in the north **Latitude:** 10°36'38.18"N to 10°36'54.46"N and **Longitude**: 77°27'37.45"E to 77°27'59.56"E. with Survey of India Topo Sheet No. 58-F/06. To conduct the study, the proposed mine lease area (core zone) and an impact zone of 10 km radius (called buffer zone) around the proposed mine site were considered. The EIA report is based on three months baseline data (i.e. March 2025 to May 2025)

11.1.2 GEOLOGY

The rock type noticed in the area for lease is Charnockite which contains mostly Quartz and Feldspar with some ferromagnesian minerals. The Charnockite is part of peninsular Gneisses, a high-grade metamorphic rock. The strike of the Charnockite formation is N40°W –S40°E with vertical dipping.

11.1.3 PROJECT DESCRIPTION

This is a proposed Rough Stone and Gravel quarry by Opencast Mechanized mining method with drilling and blasting. The quarrying is restricted up to a depth of 82 m below ground level. The geological reserves are estimated to be 1,11,59,390 m³ of Rough Stone & 2,38,210 m³ of Gravel. The mineable reserve calculated by deducting 7.5 m safety distance and bench loss. The mineable reserves are 57,26,860 m³ of Rough Stone & 2,15,410 m³ Gravel which will be recovered at the rate of 100% recovery upto a depth of 82 m Below ground level for the period of five years.

- It is proposed to quarry out rough stone with 5m bench height, 5m width with 45° slope using conventional Open cast Mechanized method. The quarry operation involves shallow jack hammer drilling, slurry blasting, excavation, Loading and transportation of Rough Stone.
- There is no overburden anticipated during entire rough stone quarrying operation.

S.No.	Type of Detail	Description		
1	Sector	1(a) Non coal mining		
2	Fresh/Existing project	Already operated by some other lessee		
3	Category	B1		
4	Nature of mineral	Minor mineral		
5	Production	57,26,860 m3 of Rough Stone &		
		2,15,410 m3 Gravel		
6	Life	5 years		
7	Waste generation and	There is no overburden anticipated during the		
	management	quarrying operation. Hence, no waste generation.		
8	Bench height and width	Height and Width – 5m		
9	Ultimate pit depth	82 m (BGL)		
10	End use	Rough Stone will be loaded into tippers to needy		
		buyers for producing aggregates, M-sand.		

11.1.4 PROJECT REQUIREMENTS

The requirements of the project is given below.7

S.No.	Nature of requirement	Description
1	Water requirement	Total water requirement of 9.0 KLD which will be
		procured from the outside agencies. Out of 3.0 KLD
		drinking water requirements, Green belt development
		is 3.0 KLD and dust suppression is 3.0 KLD.
2	Power requirement	No electricity is needed for mining operations, for
		office demands, it will be met from the state grid. Total
		Fuel requirement is 4617.39 L (Entire Project Life) for
		entire life of the project.
3	Manpower requirement	66 Nos
4	Financial requirement	Rs. 337.75 Lakhs (Including operational + Fixed
		Asset + EMP cost + CER cost).
5	Funds for Socio economic	INR 8.0 Lakhs is allocated. In addition, any demand
	development	raised by people during public hearing will also be
		met.



11.1.5 **DESCRIPTION OF LEASE AREA**

The features in the study area is given below.

Table 11.1 Description of the lease area				
S.No.	Areas	Distance from project site		
1	Areas protected under international conventions, national or local legislation for their ecological, landscape, cultural or other related value	Nil within 10 km radius		
2	Areas which are important or sensitive	for ecological reasons	5	
A	Wetlands, water courses or other water bodies,	Odai 80m E Tank 700m NE Tank 949 m NW 1.5 km		NE
		Tank Amaravathi River Shanmukha River	1.6 km 2.3 km 3.4 km	SE NW SE
В	Coastal zone, biospheres,	Nil within 10km radiu	ıs	
С	Mountains, forests	Dalavaipattinam R.F.	. – 6.8km(I	N)
3	Areas used by protected, important or sensitive species of flora or fauna for breeding, nesting, foraging, resting, overwintering, migration	Nil within 10km radius		
4	Inland, coastal, marine or underground waters	Nil within 10 km radius		
5	State, National boundaries	Nil within 10 km radius		
6	Routes or facilities used by the public for access to recreation or other tourist, pilgrim areas			
7	Defense installations	Nil within 10 km radius		
8	Densely populated or built-up area	Palani – 17.00 km - SE		



9	Areas occupied by sensitive man- made land uses (hospitals, schools, places of worship, community facilities)	Palani – 17.00 km - SE
10	Areas containing important, high quality or scarce resources (ground water resources, surface resources, forestry, agriculture, fisheries, tourism, minerals)	Nil
11	Areas already subjected to pollution or environmental damage. (those where existing legal environmental standards are exceeded)	Nil
12	Areas susceptible to natural hazard which could cause the project to present environmental problems (earth quakes, subsidence, landslides, erosion, flooding or extreme or adverse climatic conditions) similar effects	No. The area is not prone to earthquakes, floods, etc.

The baseline data collection for meteorology, air, water, noise and soil environments have been carried out during March 2025 to May 2025.

Air, water, noise and soil samples are collected and analyzed through NABL accredited lab.

11.2 EXPLANATION OF HOW ADVERSE EFFECTS HAVE BEEN MITIGATED 11.2.1 AIR ENVIRONMENT

The air monitoring have been carried out in 7 locations and the results are given below.

	Table 11.2 : Details Of Ambient Air Quality Monitoring Locations					
S. No.	Station Code	Locations	Distance & Direction	Coordinates		
1	AAQ 1	Project site	Core Zone	10°36'55.79"N & 77°28'11.26"E		
2	AAQ 2	Panampatty	1.90 km (SW)	10°35'38.89"N & 77°27'19.75"E		
3	AAQ 3	Kottathurai	1.21 km (NE)	10°37'11.27"N & 77°28'26.86"E		
4	AAQ 4	Melkaraipatty	1.74 km (SE)	10°35'52.90"N & 77°28'24.56"E		
5	AAQ 5	Keeranur	3.98 km (SE)	10°35'49.56"N & 77°29'53.13"E		
6	AAQ6	Rajampatti	1.52 km (W)	10°37'10.21"N & 77°26'52.67"E		
7	AAQ7	Bommanallur	6.18 km (E)	10°36'43.79"N & 77°31'22.60"E		

Station ID	Min	Max	Avg.
	Particulate matt	er PM- _{2.5 (} µg/m³)	
AAQ-1	25.5	37.10	31.97
AAQ-2	24.8	32.6	27.9
AAQ-3	22.4	27.6	24.4
AAQ-4	19.7	29.2	24.1
AAQ-5	23.3	31.4	26.8
AAQ-6	24.3	29.5	26.3
AAQ-7	20.5	25.7	22.5
	CPCB NAAQS 2009 f	for PM _{2.5} - 60 μg/m ³	
	Particulate matt	er PM- ₁₀ (µg/m³)	
AAQ-1	55.6	80.4	69.36
AAQ-2	52.8	69.4	59.4
AAQ-3	48.6	59.9	53.1
AAQ-4	42.8	59.4	51.8
AAQ-5	50.8	68.4	58.3
AAQ-6	52.8	64.1	57.3
AAQ-7	44.4	55.7	48.9
	PCB NAAQS 2009 f	or PM ₁₀ - 100 μg/m ³	
		e as SO ₂ (µg/m³)	
AAQ-1	6.7	9.6	7.79
AAQ-2	4.9	7.2	6.0
AAQ-3	4.6	6.6	5.7
AAQ-4	4.4	6.7	5.5
AAQ-5	5.7	7.7	6.7
AAQ-6	5.5	7.5	6.6
AAQ-7	4.8	6.8	5.9
	CPCB NAAQS 2009	for SO ₂ - 80 μg/m ³	
	Oxide of Nitroge	n as NO₂ (μg/m³)	
AAQ-1	10.8	15.5	12.84
AAQ-2	7.1	10.2	8.8
AAQ-3	6.7	9.9	8.3
AAQ-4	6.0	8.3	7.2
AAQ-5	9.4	11.4	10.5
AAQ-6	9.7	12.9	11.3
AAQ-7	7.7	10.9	9.3
	CPCB NAAQS 2009	for NO ₂ - 80 μg/m ³	

All the values of pollutant concentrations were found to be within the NAAQs Standards.



11.2.2 WATER ENVIRONMENT

Surface Water Analysis Results

	Table No 11.3 Surface Water Analysis Results				
Sr.No	Parameter	Unit	SW1	SW2	Surface water standard s (IS 2296 Class-A)
1	Odour	-	Agreeable	Agreeable	-
2	Turbidity	NTU	<1.0	<1.0	1
3	pH at 25 °C	ı	7.90	7.82	6.5-8.5
4	Electrical Conductivity	μs/cm	228	194	-
5	Total Dissolved Solids	mg/l	138	116	500
6	Total hardness as CaCO3	mg/l	80.2	75	-
7	Calcium as Ca	mg/l	16.1	15.4	300
8	Magnesium as Mg	mg/l	9.6	8.8	-
9	Calcium as CaCO3	mg/l	40.3	38.4	-
10	Magnesium as CaCO3	mg/l	39.9	36.8	-
11	Total alkalinity as CaCO3	mg/l	42.8	36.7	-
12	Chloride as CI-	mg/l	30.6	35.2	250
13	Free Residual chlorine as CI-	mg/l	BDL (D.L - 0.2)	BDL (D.L - 0.2)	-
14	Sulphates as SO42-	mg/l	14.9	15.2	400
15	Iron as Fe	mg/l	BDL(D.L - 0.01)	BDL(D.L - 0.01)	0.3
16	Nitrate as NO3	mg/l	BDL(DL-1.0)	1.65	20
17	Fluoride as F	mg/l	0.26	0.21	1.5
18	Manganese as Mn	mg/l	BDL (D.L - 0.05)	BDL(D.L-0.05)	0.5
19	COD	mg/l	BDL (D.L - 4.0)	BDL (D.L - 4.0)	-
20	BOD	mg/l	BDL (D.L - 2.0)	BDL (D.L - 2.0)	-
21	TSS	mg/l	BDL(DL-2.0)	BDL(DL-2.0)	-
22	DO	Mg/l	6.3	6.2	6.0

The samples were analyzed by M/s.Shrient Analytical & Research Labs Private Limited; Chennai and the results are summarized below.



		Table	e No.11.4 R	esults of G	round Wate	er Sampling	Analysis		
parameter	GW1	GW2	GW3	GW4	GW5	GW6	GW7	Specification/Limit (As per IS:10500: 2012)	
								Acceptable	Permissible Limits
Odour	AGREE ABLE	AGREEAB LE	AGREEAB LE	AGREEAB LE	AGREEAB LE	AGREEAB LE	AGREEABLE	Agreeable	Agreeable
Turbidity	<1	<1	<1	<1	<1	<1	<1	1	5
pH at 25 °C	7.27	7.75	7.26	7.39	7.25	7.99	7.42	6.5- 8.5	No relaxation
Electrical Conductivity	1094	1020	1334	1422	920.2	735.8	846.9	-	-
Total Dissolved Solids	656	612	800	854	552	442	510	500	2000
Total hardness as CaCO₃	334	172	575	482	387	214	282	200	600
Calcium as Ca	81.6	43.2	132	108	106	48.4	72.0	75.0	200
Magnesium as Mg	31.2	15.4	58.8	50.9	29.0	22.3	24.5	30.0	100
Calcium as CaCO ₃	204	108	330	270	266	121	180	-	-
Magnesium as CaCO₃	130	64.0	245	212	121	93.0	102	-	-
Total alkalinity as CaCO₃	447	176	382	438	284	201	234	200	600
Chloride as Cl-	126	374	255	211	146	138	155	250	1000
Free Residual chlorine as Cl	BDL (D.L - 0.2)	BDL(D.L- 0.2)	BDL(D.L- 0.2)	BDL (D.L- 0.2)	BDL(D.L- 0.2)	BDL (D.L - 0.2)	BDL (D.L - 0.2)	0.2	1
Sulphates as SO ₄ ²⁻	150	76.5	104	155	33.2	53.6	57.9	200	400
Iron as Fe	BDL(D. L - 0.01)	BDL(D.L - 0.01)	BDL(D.L - 0.01)	BDL(D.L - 0.01)	BDL(D.L - 0.01)	0.06	0.07	0.30	0.3
Nitrate as NO₃	3.56	1.66	3.05	2.57	2.96	1.45	2.77	45	45
Fluoride as F	0.35	0.32	0.48	0.39	0.34	0.49	0.44	1	1.5
Manganese as Mn	BDL (D.L - 0.05)	BDL(D.L- 0.05)	BDL(D.L- 0.05)	BDL(D.L- 0.05)	BDL(D.L- 0.05)	BDL (D.L - 0.05)	BDL (D.L - 0.05)	1	0.3

All the values were found to be within permissible limits



11.2.3 NOISE ENVIRONMENT

Noise levels were measured in 7 locations and the results are given below.

Table 11.x Noise monitoring results							
S. No	Location	Day equivalent	Night equivalent	Day equivalent limits by CPCB	Night equivalent limits by CPCB		
1	Project site	50.1	40.4	75	70		
2	Panampatty	45.7	39.8		45		
3	Kottathurai	43.6	40.5				
4	Melkaraipatty	46.5	41.0	55			
5	Keeranur	51.3	42.2	33			
6	Rajampatti	47.7	42.5				
7	Bommanallur	50.0	42.0				

11.2.4 SOIL ENVIRONMENT

Soil samples are collected from 7 locations and the results are given below.

S.No	Parameter	Unit	S1	S2	S3	S4	S5	S6	S7
1	pH at 25 °C	-	7.85	6.52	6.97	7.05	7.12	6.78	6.99
2	Electrical Conductivity	µmhos/ cm	105	75.62	152	90.47	165	89.74	95.47
3	Dry matter content	%	91.24	94.65	94.72	95.74	94.21	95.66	94.23
4	Water Content	%	8.76	5.35	5.28	4.26	5.79	4.34	5.77
5	Organic Matter	%	0.62	1.33	1.21	0.94	1.24	1.05	1.33
6	Soil texture	-	SILT LOAM	silty clay	silty clay loam	silt Ioam	silty clay loam	silt Ioam	loam
7	Grain Size Distribution	%	26.54	8.92	13.55	24.74	13.69	29.21	34.52
	i. Sand	0.4							
8	ii. Silt	%	58.62	47.46	47.52	68.72	48.21	53.64	50.33
9	iii. Clay	%	14.84	43.62	38.93	6.54	38.10	17.15	15.15
10	Phosphorous as P	mg/kg	0.94	1.72	2.31	1.74	1.89	1.77	1.34
11	Sodium as Na	mg/kg	778	432	725	597	705	375	402
12	Potassium as K	mg/kg	520	662	895	794	870	712	616
13	Nitrogen and Nitregenous Compounds	mg/kg	356	269	288	642	321	230	450
14	Total Soluble Sulphate	%	BDL(D.L. 0.02)	BDL(D.L. 0.02)	BDL(D.L .0.02)	BDL(D. L.0.02)	BDL(D. L.0.02)	BDL(D .L.0.02	BDL(D .L.0.02)
15	Porosity	%	19.4	18.5	19.4	18.3	19.2	19.6	19.8
16	Water Holding Cabacity	Inches/ foot	42	40	42	40	42	40	42



11.2.5 BIOLOGICAL ENVIRONMENT

FLORA

For measuring the extent of flora present in the study area, the area is divided in to 4 quadrants. The flora population in each quadrant is summed up for the total population in the study area. Field survey is done. Erukku, Aavarai and Nayuruvi are found in lease area. In the buffer zone, common trees like Neem, papaya, mango, teak, etc and shrubs like Avarai, Aloe vera, etc, climbers like Kovai,jasmine etc are found.

FAUNA

In the study area, commonly found animals like dogs, cats, bush rat, cows, birds like crow, Myna, Sparrow, etc were found.

11.2.6 LAND USE

The land use land cover data is found using the LANDSAT – 9 satellite imagery. The number of bands used are 11. The land use pattern is given below:

SI.No.	LAND USE / LAND COVER	Area in Sq.Km	Area in Percentage
1	Built-up land	5.93	1.79
3	Crop land	160.23	48.24
4	Existing mining area	2.05	0.62
5	Fallow land	4.51	1.36
6	Land with scrub	3.13	0.94
7	Land without scrub	98.72	29.72
	Plantation	50.16	15.10
8	Water bodies	7.43	2.24
	Total Area	332.16	100.00

11.2.7 SOCIO ECONOMIC ENVIRONMENT

The socio economic environment of the study area is studied by conducting primary sites through site visits and conducting sample surveys. The secondary data obtained from Census 2011 is also used.

The following data area collected from secondary data.

- Demographic pattern.
- Health pattern
- Occupational structure.
- · Amenities available.

The expert visited 6 villages in the study area namely Panampatty, Kottathurai, Melkaraipatty, Keeranur, Rajampatti and Bommanallur Villages. Discussions were held with the people from nearby locality to study the social and economic conditions prevailing in the area. The expert also visited nearby hospitals and primary health centres.

11.2.8 HYDROGEOLOGY OF THE LEASE AREA

In Dindugal District, during the pre monsoon, the water level generally in declining trend ranges from G.L. to 15m. The depth of well below Ground Level 12.0m are become dry during hot season like May, June, July. In the post monsoon, the water level generally in upward trend due to rainfall and it may reach the Ground Level also. Dindugul district is almost made up of hard rock covered by thin soil.

There are many tanks located in the study area, which are mostly dry throughout the year. These tanks get water only during monsoons. The factors may be monsoon failure, insufficient rainfall, poor rain water management and water consuming patterns.

11.2.9 GROUND WATER STUDY

For Ground water study, satellite imagery is used. Water levels from monitoring levels are collected through imaging. The pre-monsoon and post-monsoon data are collected and the results are analyzed.

During field visit, it is observed that water is available in wells only after monsoon. The yield is obtained at deep levels only.

As far as the mining lease area is considered, the area is rocky and no major seepage is envisaged. The depth proposed is 82 m BGL. Hence, there will not be any major impact due to mining on water levels or ground water levels in the area.

ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

Environmental impacts on the following environments are identified.

- Land environment
- Water environment
- Vegetation
- Fauna
- Air environment
- Noise environment
- Socio-economic impacts

11.2.10 LAND ENVIRONMENT: IMPACT AND MITIGATION MEASURES

The major impact due to this project on land environment is the change in land use. Since this quarry is a small one and the production is less, mining activity will be carried out upto 82 m BGL. Other than quarrying of minerals, no other change will be done since there is no dumping. To prevent soil erosion during monsoon season, garland drain will be constructed with silt traps. At the mine closure stage, 12.73.00 Ha of lease area will be left as rain water harvesting pond. 1.61.00 Ha will be developed with green belt. For this, plants like Pongamia pinnata, Syzigium cumini, Albizia lebbeck, Thespesia populnea, Bauhinia racemose, Cassia siamea, Azadirachta indiaca are selected. A total of 1610 trees are planned to be planted. Spacing will be 3m x 3m.

11.2.11 WATER ENVIRONMENT: IMPACT AND MITIGATION MEASURES

There is no water body present inside the lease area. The entire water requirement for the project is 9.0 KLD which will be sourced from outside agencies. Negligible sewage will be generated, for which a septic tank with soak pit will be set up.

During monsoon season, the excess rain water, if any, will be led through garland drain of 0.6m width and 0.3 m depth to the collection pond with silt traps. Since the mining operation will be limited upto depth of 82m (BGL), there will not be any seepage. However, the rain water percolation and collection of water from seepage shall be less than 300lpm and it shall be pumped out periodically by a stand by diesel powered Centrifugal pump motivated with 7.5H.P.Motor. The quality of water is expected to be potable. Hence, water stored in the quarry pit will be pumped into the adjacent agricultural fields. Further the water can also be used for plantation purposes. The major water bodies found in the buffer zone are.

Water bodies	Distance	Direction
Odai	80m	Е
Tank	700m	NE
Tank	949 m	NW
Tank	1.5 km	SE
Tank	1.6 km	SE
Amaravathi River	2.3 km	NW
Shanmukha River	3.4 km	SE

Since these water bodies are located outside the lease area and there is no discharge of effluent or any untreated water from the mines will be made in to these water bodies, there is no major impact. The proponent will restrict the mining operation only within the lease and no other work will be carried out near the canal or any area outside the lease.

It is planned to carryout appropriate rainwater harvesting schemes and artificial recharge schemes in the area.

- ➤ Rain water falling in the quarry will be collected efficiently through garland drains.
- > Water thus collected will be passed through collection tank with silt traps. This water can be used by the proponent for water sprinkling and for green belt purposes.
- > Excess water after desiltation will be provided to downstream users, if any

11.2.12 BIOLOGICAL ENVIRONMENT: IMPACT AND MITIGATION MEASURES.

Impacts

- Fauna is affected due to noise and vibration.
- Dust generation due to mining activities
- Change in land use of the lease area
- Accidental falling of animals

Mitigation measures

- Sirens will be blown before blasting in the mines. To reduce noise levels,
 plantation will be done. Blasting will be carried out only in the allotted time.
- To reduce dust generation, mist sprayers will be used. During transportation, the material will be covered with tarpaulin. Water sprinkling will be done to reduce generation of pollutants
- After the mine closure stage, the mine pit will be left as rain water collecting tank, which can attract bird population in the nearby areas.
- To prevent entry of animals, the mining area will be properly fenced.

11.2.13 AIR ENVIRONMENT: IMPACT AND MITIGATION MEASURES

The major air pollutants due to mining operations are fugitive emissions like PM_{10} , $PM_{2.5}$. Other than these pollutants, gaseous emissions of sulfur dioxide (SO_2) and oxides of nitrogen (NO_x) due to excavation/loading equipment and vehicles plying on haul roads are the cause of air pollution in the project area.

The major impacts are Dust emission due to drilling, blasting and transportation. The major mitigation measures include Using Wet drilling methods, Allowing drilling only with PPE, Carrying out blasting only during specified times, Avoiding blasting during unfavourable weather conditions, Using explosives of good quality, Using mist sprayers Regular wetting of transport, Covering the materials carried in tippers with tarpaulin, Proper maintenance of vehicles used for transportation, Conducting regular emission tests for vehicles used for transport Development of greenbelt is proposed in the safety zone 7.5m barriers in the lease area.

The anticipated data is calculated using AERMOD software and the projected values are found to be within limits.

11.2.14 NOISE ENVIRONMENT: IMPACT AND MITIGATION MEASURES

Impacts

- Noise generation in mining is due to operation like drilling, blasting and transportation of minerals within and outside the lease area.
- As per DGMS (Directorate General of Mines Safety) and OSHA (Occupational Safety and Health Administration) limits, the acceptable noise level is 85 dB(A) for an exposure period of 8 hours.
- Exposure to loud noise can also cause high blood pressure, heart disease, sleep disturbances, and stress. Noise pollution also impacts the health and well-being of wildlife.
- Noise exceeding prescribed limits may cause impairment like abnormal loudness perception, tinnitus, which causes a persistent high-pitched ringing in the ears, paracusis or distorted hearing

Mitigation measures

- ♣ As the distance between the source and receptor increases, the noise level also decreases. Hence, there will be a natural attenuation
- ♣ The proposed has planned to develop green belt in the periphery of the lease area, which diminishes sound volume by dampening them.
- ♣ All the equipment/machinery/trucks involved will be properly maintained to control noise generation
- ♣ Conducting regular health checkups for employees involved
- Employees will be made to work on shifts to reduce their exposure time
- ♣ Providing earplugs to all employees

By adopting these measures, the noise levels will be maintained well within MoEF & CC limits since the baseline value is low.

11.2.15 <u>VIBRATION: IMPACT AND MITIGATION MEASURES</u> Impacts

- ♣ Though vibration will be only felt by the people working inside the lease area, it is usually undesired.
- ♣ Vibration may also cause flyrocks
- ♣ It may frighten the birds and small insects in the lease area. However, it will be felt only for a short period

Mitigation measures

- ♣ Carrying out blasting on limited scale, only from 12:00 PM to 2:00 PM
- ♣ Control of fly rock and vibration by maintaining peak particle velocity with in standard as prescribed by the DGMS and MOEF & CC.
- ♣ Shallow depths jackhammer drilling and blasting is proposed to be carried out with minimum use of explosive
- ♣ Supervising blasting by competent and statutory foreman/ mines manager

11.2.16 SOCIO ECONOMIC ENVIRONMENT

Impact and Mitigation measures

No land is acquired from anyone. No rehabilitation is needed. Hence, there is no negative impact. The proponent has planned to spend INR 8,00,000 for CER activities. This amount will be subjected to change after public hearing.

11.2.17 OCCUPATIONAL HEALTH Impacts

Dust generation due to drilling and blasting, Noise generation due to drilling and blasting, unexpected accidents. Continuous exposure to dust causes Pneumonia, Tuberculosis, Rhematic arthritis and Segmental Vibration, Short term impact will be lack of sleep, high blood pressure and heart ailments. Long term exposure may lead to partial or permanent deafness, Risks include fly rocks, cracks or fissures due to improper mining methods

Mitigation measures

- Using dust suppression measures like water spraying on roads to reduce rise of air pollutants
- Providing green belt for air pollutant and noise attenuation
- Ensuring slope stability
- Employing only trained professionals for blasting
- Conducting Pre-Medical Examination for employees before inducting
- Conducting periodical Medical Examination once in 6 months.
- Making all first aid kits available in mines office
- Keeping fire extinguisher in place
- Educating the employees about how to handle unexpected happenings
- Posting information containing emergency contact numbers in mines office
- By adopting all these measures, the safety of the employees working in the quarry will be ensured.

11.2.18 ENVIRONMENTAL MONITORING PROGRAMME

Monitoring is done to measure the efficiency of control measures implemented. Regular monitoring of various environmental parameters like air, water, noise and soil environments is needed to assess the status of environment during the project operation. A schedule is framed with timeline to monitor various parameters during the operation of the project. To evaluate the effectiveness of environmental management programme, regular monitoring of the important environmental parameters will be taken up. Air monitoring will be carried out once in 3 months, water sample will be collected once in a season, noise will be monitored once in 3 months, soil samples will be analyzed once per season. For EMP, a budget of INR 50.35 lakhs is allocated.



11.2.19 PROJECT BENEFITS

Financial benefits

- > This project will contribute financially through payment of taxes like royalty, GST, etc
- ➤ The project will also contribute via CSR.
- > The demands of people during public hearing will also be considered by the project proponent

Social benefits

- > This project provides employment to 66 people. Local people will be hired for unskilled labour.
- > Through CSR, nearby schools, hospitals will be benefitted.
- ➤ For CSR, INR 8,00,000 is allocated.
- > Based on the demand of the people during public hearing, further funds will be allocated, if necessary.

Various aspects of mining activities were considered and related impacts were evaluated. Considering all the possible ways to mitigate the environmental concerns Environmental Management Plan was prepared and 50.35 lakhs for the five years has been allocated as EMP cost. The EMP is dynamic, flexible and subjected to periodic review. For project where the major environmental impacts are associated, EMP will be under regular review. Thus, the proper steps will be taken to accomplish all the goals mentioned in the EMP and the project will bring the positive impact in the study area.

CHAPTER 12 DISCLOSURE OF CONSULTANTS

Global Mining Solutions is a NABET Accredited EIA consultant as per NABET certificate NABET/EIA/23-26/SA 0241. The registered office of Global Mining Solutions is at Plot No.6, S.F.No.13/2 A2, VS City, RC Chettypatty, Kottamettupatty, Omalur, Salem, Tamilnadu-636455.

Declaration by Experts contributing to the proposed Rough Stone and Gravel Quarry over a lease extent of 14.40.00 Ha., & Cluster extent of 24.79.50Ha, located at Melkaraipatti Village, Palani Taluk, Dindigul District, Tamil Nadu State.

I, hereby, certify that I was a part of the EIA team that developed the above EIA.

EIA Coordinator_Name: M. Manikandan

Signature & Date

Period of involvement: March 2025 to May 2025.

Contact information:

M/s Global Mining Solutions

Plot No.6, SF No. 13/2, A2, VS City, RC Chettypatty,

Kottamettupatty, Omalur,

Salem, Tamil Nadu – 636 455

S. No.	Functional areas	Name of the expert/s	Involvement (period and task**)	Signature and Date
1	АР	Dhanalakshmi Ramanathan	Assessment of existing air quality, Impact of the project on ambient air and suggested mitigation measures for air pollution. Period: March 2025 to May 2025.	R. Dhams_
2	WP	Abirami Kaliaperumal	Assessment of existing water quality, impact of the project on surface and ground water quality, suggested mitigation measures for minimizing the impact. Period: March 2025 to May 2025	K. Alining
3	SHW	Ramadoss N	Assessment of waste generated from the project, suggested waste management practices. Period: March 2025 to May 2025	Ce Ray
4	SE	Sarasvathy K	Baseline SE studies. Data compilation and assessment. Impact of the project on SE status of the area. Formulation of CER plan. Period: March 2025 to May 2025	of setty
5	ЕВ	Saravanan S	Baseline data collection of related to ecology of the area. Period: March 2025 to May 2025	Mararanao_

6	HG	Ravinthiran N	Hydrogeological feature of the area. Ground water depth and impact of project on ground water of the area. Period: March 2025 to May 2025	No o Metro en Par
7	AQ	Srilatha Thiruveedhula	Air quality modeling utilizing the area source model. Predication of the ground level concentration of the dust. Suggesting suitable mitigation measures. Period: March 2025 to May 2025	T Smalte
8	NV	Dhanalakshmi Ramanathan	Ambient noise study of the area. Incremental noise generation due to quarry operation and impact of the noise due to the project. Period: March 2025 to May 2025	R. Dhams
9	LU	Srilatha Thiruveedhula	Preparation of land use map based on satellite imagery. Land use classification and analysis. Impact prediction of the project on the surrounding land environment. Period: March 2025 to May 2025	T Smilalte
10	RH	S.V. Prashant	Identification of the Risk related to the mining activities. Preparation of emergency disaster management plan. Plan for supply of safety equipment for the worker. Period: March 2024 to May 2024	forashand.
11	SC	Shisupal Sing	Soil monitoring, secondary data collection on soil type, soil management practices, utilization of topsoil. Period: March 2025 to May 2025	Brouper Singly.

12	GEO	Valliappan Meyyappan	Geological map, stability of quarry and dump, management plan for mine stability, after use of mining quarry and geological feature of the area. Period: March 2025 to May 2025	Mendlarene.
----	-----	-------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------

TM- EC						
S. No	Name of TM (EC)	Sector (s) propos ed	Approved (to work under)	Period of involvem ent	Type of work	Signature
1.	Abirami Kaliyaperumal	1(a)	Manikand an Manicka m	Period: March to May 2025.	Associated with EIA Coordinator in overall preparation of Draft EIA/EMP report.	K. Alining
TM-	FAE:					
S. N o	Name of TM (FAE)	Funct ional Area	Approve d FAE (to work under)	Period of involve ment	Type of work	Signature
1	Kamaraj S	HG	Ashok Kumar Rajagopa I	Period: March to May 2025.	Associated with Experts in studying hydrogeological pattern of study area, Studying ground water and the impact of the project on ground water	3. Kannet
2	B.J.Sampatkk umar	SE	Saraswat hy K	Period: March to May 2025.	Assisted by the Expert in preparation of socio-economic report.	
		SC	Shishupal Singh	Period: March to May 2025.	Assisted by the Expert in interpretation of soil sampling and their	bij

1						
					quality involved in the project.	
3	Mownica Balaji	NV	Dhanalak shmi Ramanat han	Period: March to May 2025.	Associated with the expert team in suggesting control measures for noise and Ground Vibration.	Mounica.
		AP	Dhanalak shmi Ramanat han		Associated with expert team in assessing existing air quality, impact of the project on ambient air and suggesting mitigation measures for air pollution	
4	Balasubraman i G	NV	Dhanalak shmi Ramanat han	Period: March to May 2025.	Associated with the expert in selection of base line monitoring stations, Review of Noise quality results, Review of emission sources – drilling, blasting, excavation and transportation, Identification of	Q. Lalagua

		Geo	Valliappa n Meyyapp an		impacts on environment, identification of remedial measures and input to EIA preparation Associated with the expert in preparing Geological map.	
5	Suresh Mani	LU	Srilatha Thiruvee dhula	Period: March to May 2025.	Associated with Experts in preparing Land use map based on satellite imagery, Land use classification and analysis, Impact prediction on surrounding land environment.	M. Tiret
		HG	Ashok Kumar Rajagopa I		Associated with Experts in studying hydrogeology pattern of study area, studying water and the impact of the project on ground water.	

6	Asan Ali S	NV	Srilatha	Period:	Associated with	
			Thiruvee	March to	the expert in	
			dhula	May	monitoring and	
				2025.	analysis of blast	
					induced ground	
					vibration in	
					order to	
					develop the	
					site-specific	
					equation for its	
					prediction,	
					monitoring of	
					fly rocks & air	
					blast (noise),	
					preparation of	S. Asan ali
					SOP's for the	S. Asan an
					safety blasting	
					practice in the	
					mines.	
				-		
		Geo	Valliappa		Associated with	
			n		the Qualified	
			Меууарр		Person &	
			an		Experts in	
					preparing	
					Geological map,	
					assessing	
					stability of	
					quarry slope	
					faces and	
					dump,	
					management	
					plan for mine stability and	
					after use of	
					mining quarry	
					and geological	
					features of the	
					area during	
					mine plan	
					preparation.	
					F. 550100011	

1	,		_	7		,
7	Prabu M	Geo	Valliappa n Meyyapp an	Period: March to May 2025.	Associated with Experts and involved in Field Investigations, Mapping /Georeferencing	N. Dorub
8	Abirami Kaliyaperumal	RH	S V Prashant	Period: March to May 2025.	Associated with experts and involved in the identification risk and hazard, suggesting safeguard measures.	L. Ling
9	Dhanalakshmi Ramanathan	AQ	Srilatha Thiruvee dhula	Period: March to May 2025	Involved with Expert team and involved in calculating air emission values using Meteorological data and Providing inputs for running modelling (ISCT3, AERMOD).	R. Dhams
10	Manikandan Manickam	AP	Ramados s N	Period: March to May 2025.	Associated with expert team in assessing existing air quality, impact of the project on ambient air	min



			and suggesting mitigation measures for air pollution	
	WP	Abirami Kaliyaper umal	Involved in the identification of source of water and waste generation, suggesting treatment for safe disposal of wastewater	